




X6 ROVR

Walk-Behind Scrubber

Parts Manual



(S/N 10000000-20000000)



Hygenic® Fully Cleanable Recovery Tank
TennantTrue® Parts
Insta-Click™ Magnetic Disk



Global





For the latest Parts manuals and other
language Operator manuals, visit:

www.tennantco.com/manual

4184783
Rev. 01 (04-2026)



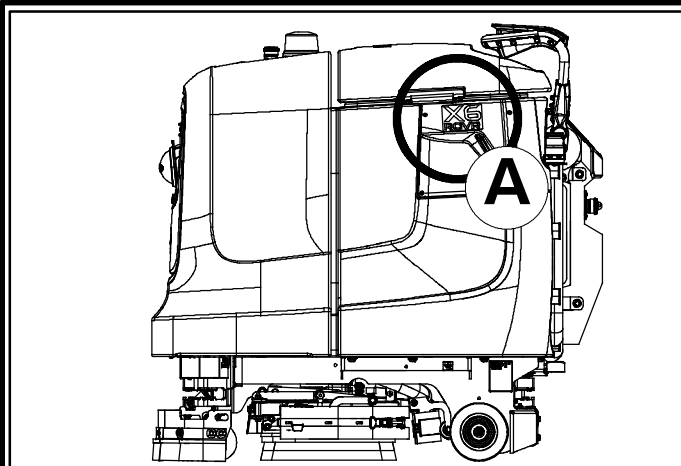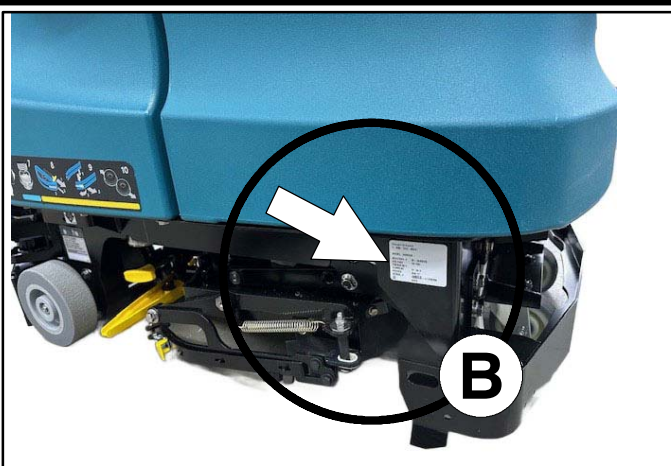

Ref	Part No.	Serial Number	Description	Qty.
1	82681	(000000-)	Bracket Wldt, Lpg Mount	1
2	63810	(000000-)	Latch Assy, Lpg Tank Mtg, W/Nut	4
3	51839	(000000-)	Nut Adjustable, Lpg Tank Mtg	2
4	49263	(000000-)	Tie, Cable	3
D	82556	(000000- 001039)	Bracket, Vaporizer	1
	54930	(000000-)	Vaporizer, LPG	1

HOW TO ORDER PARTS - See diagram above

Only use TENNANT Company supplied or equivalent parts. Parts and supplies may be ordered online, by phone, by fax or by mail.

Follow the steps below to ensure prompt delivery.

1. (A) Identify the machine model.
2. (B) Identify the machine serial number from the data label.
3. (C) Ensure the proper serial number is used from the parts list.
4. Identify the part number and quantity.
Do not order by page or reference numbers.
5. Provide your name, company name, customer ID number, billing and shipping address, phone number and purchase order number.
6. Provide detail shipping instructions.

(D) ▽ - identifies an assembly

▲ - identifies parts included in assembly

Please fill out at time of installation for future reference.

Model No. - _____

Serial No. - _____

Machine Options - _____

Sales Rep. - _____

Sales Rep. phone no. - _____

Customer ID Number - _____

Installation Date - _____

Tennant Company
10400 Clean Street
Eden Prairie, MN 55344-2650
USA
Phone: (800) 553-8033
www.tennantco.com

Tennant Company N.V.
Industrielaan 6 5405 AB
P.O. Box 6 5400 AA
Uden- The Netherlands
europe@tennantco.com
www.tennantco.com

Specifications and parts are subject to change without notice.

Copyright © 2026 TENNANT Company, Printed in U.S.A.

ES	CÓMO SOLICITAR PIEZAS - Consulte el diagrama anterior.	
	<p>Utilice sólo las piezas suministradas por TENNANT Company o piezas equivalentes. Puede solicitar las piezas a través de internet, por teléfono, por fax o por correo.</p> <p>Siga los siguientes pasos para que la entrega sea rápida.</p> <ol style="list-style-type: none"> 1. (A) Indique el modelo de máquina. 2. (B) Indique el número de serie de la etiqueta de datos. 3. (C) Asegúrese de que indica el número de serie correcto de la lista de piezas. 4. Indique la cantidad y el número de la pieza. No realice el pedido indicando el número de página o el de referencia. 5. Incluya su nombre, el nombre de la empresa, el ID de cliente, las direcciones de envío y facturación, el número de teléfono y el número del pedido de compra. 6. Facilite instrucciones de envío. 	
	<p>(D) ▽ - identifica un conjunto ▲ - identifica piezas de un conjunto</p>	<p>Rellene estos datos cuando realice la instalación para utilizarlos como referencia en el futuro.</p> <p>Nº modelo - _____</p> <p>Nº serie - _____</p> <p>Opciones de la máquina - _____</p> <p>Vendedor - _____</p> <p>Nº teléfono vendedor - _____</p> <p>Nº cliente - _____</p> <p>Fecha de instalación - _____</p>

FR	COMMENT COMMANDER DES PIÈCES DÉTACHÉES - Voir le schéma ci-dessus.	
	<p>Utilisez uniquement des pièces fournies par la société TENNANT ou équivalentes. Les pièces et fournitures peuvent être commandées en ligne, par téléphone, fax, ou par courrier.</p> <p>Suivez les étapes ci-dessous pour assurer une livraison rapide.</p> <ol style="list-style-type: none"> 1. (A) Identifiez le modèle de la machine. 2. (B) Identifiez le numéro de série de la machine, à partir de l'étiquette signalétique. 3. (C) Assurez-vous que le numéro de série correct est utilisé à partir de la liste de pièces détachées. 4. Identifiez le numéro de pièce et la quantité. Ne commandez pas par page ou numéros de référence. 5. Fournissez votre nom, le nom de votre société, votre numéro d'identification de client, l'adresse de facturation et d'expédition, le numéro de téléphone et le numéro du bon de commande. 6. Fournissez des instructions d'expédition détaillées. 	
	<p>(D) ▽ - identifie un assemblage ▲ - identifie les pièces composant l'assemblage</p>	<p>A remplir au moment de l'installation à titre de référence.</p> <p>Nº du modèle - _____</p> <p>Nº de série - _____</p> <p>Options de la machine - _____</p> <p>Agent commercial - _____</p> <p>Nº tél. de l'agent commercial - _____</p> <p>Numéro d'identification client - _____</p> <p>Date d'installation - _____</p>

RECOMMENDED MAINTENANCE ITEMS

GENERAL RECOMMENDED MAINTENANCE ITEMS	6
--	---

STANDARD PARTS

BRUSHES AND PAD DRIVER GROUP, 13 IN / 330MM DISK MAGNETIC HUB (NA / AUS) ...	8
BRUSHES AND PAD DRIVER GROUP, 13 IN / 330MM DISK MAGNETIC HUB (EMEA)	10
SCRUB HEAD GROUP, DISK 13 INCH / 330MM MAGNETIC HUB	12
SCRUB HEAD LINKAGE GROUP	14
FRONT AND TOP SHROUD GROUP	16
RECOVERY TANK GROUP	18
VACUUM MOTOR GROUP	20
SOLUTION TANK GROUP	22
FRAME AND DRIVE WHEEL GROUP	24
FRONT CAMERA AND SENSOR GROUP	26
AMR SIGN MARKERS GROUP	28
UPPER CAMERA SENSOR GROUP, RIGHT ...	30
UPPER CAMERA SENSOR GROUP, LEFT	32
LOWER CAMERA SENSOR GROUP	34
PERIMETER GUARD GROUP	36
HANDLE BAIL GROUP	38
CONTROL PANEL GROUP	40
REAR CONSOLE PANEL GROUP	42
ELECTRICAL BOX GROUP	44
ELECTRICAL GROUP	46
ELECTRICAL CONTROLLER GROUP	48
REAR SQUEEGEE GROUP	50
SIDE SQUEEGEE GROUP, RIGHT	52
SIDE SQUEEGEE GROUP, LEFT	54
SOLUTION GROUP, CONVENTIONAL	56

BATTERY GROUP, LITHIUM, 24V 90AH 125 BAUD	58
ON- BOARD BATTERY CHARGER GROUP	60
OFF- BOARD BATTERY CHARGER GROUP ...	62
LABEL GROUP (NA / AUS)	64
LABEL GROUP (EMEA)	65
CABLE GROUP	66
WIRE HARNESS GROUP	69

OPTIONS

CHARGING STATION, OFF- BOARD BATTERY CHARGER, 24V 650W	70
CHARGING STATION, OFF- BOARD BATTERY CHARGER, 24V 650W - CONT'D	72
DUST FILTER KIT, RECOVERY TANK	74
BLUE LIGHT KIT	75
DOCUMENTATION GROUP	76

BREAKDOWNS

DOCKING CONTACT ASSEMBLY BREAKDOWN, 4187001	78
DRIVE WHEEL MOTOR BREAKDOWN, 4187014	80

RECOMMENDED MAINTENANCE ITEMS

GENERAL RECOMMENDED MAINTENANCE ITEMS

	Part No.	Serial Number	Description	Qty.
	1271199	()	Brush Assy, Disk, Scb, 13.0d, Nyl [Mag] (Standard)	2
	1271201	()	Brush Assy, Disk, Scb, 13.0d, Pyp [Mag] (Option)	2
	1271203	()	Brush Assy, Disk, Scb, 13.0d, Abr [Mag] (Option)	2
	1271205	()	Disk, Polish, 13.0d, 1000grit [Db Mag] (Option - NA Only)	2
	1271206	()	Disk, Polish, 13.0d, 2000grit [Db Mag] (Option - NA Only)	2
▽	1271200	()	Driver, Pad, 13.0d [Mag]	2
▲	4032342	()	Device, Centering, Clip On, TI [Gf Pp]	1
	1243341	()	Pad, Buff, 13.0d, Red [1pick=1ctn] (Standard - NA)	2
	1243342	()	Pad, Polish, 13.0d, White [1pick=1ctn] (Option - NA)	2
	1243655	()	Pad, Scb, 13.0d Blu [1pick=1ctn] (Option - NA)	2
	1243567	()	Pad, Stripping, 13.0d, Brn [1pick=1ctn] (Option - NA)	2
	1243666	()	Pad, Surf Prep, 13.0d Maroon[1pick=1ctn] (Option - NA)	2
	1240356	()	Pad, Polish, 13.0d, Yel [1pick=1ctn] (Option - NA)	2
	995610	()	Pad, Buff, 13.0/330, Red [3m, 5pc] (Standard - EMEA)	2
	994516	()	Pad, Buff, 13.0/330, Red [5pc] (Option - EMEA)	2
	994513	()	Pad, Polish, 13.0/330, White [5pc] (Option - EMEA)	2
	995618	()	Pad, Scb, 13.0inch /330 [3m Blu, 5pc] (Option - EMEA)	2
	994515	()	Pad, Scb, 13.0inch /330, Blu [5pc] (Option - EMEA)	2
	995625	()	Pad, Stripping, 13.0/330, Brown[3m, 5pc] (Option - EMEA)	2
	994514	()	Pad, Stripping, 13.0/330, Brown[5pc] (Option - EMEA)	2
	1243666	()	Pad, Surf Prep, 13.0d Maroon[1pick=1ctn] (Option - EMEA)	2
▽	9023399	()	Rear Sqge Blades, Primo [X6 Rovr] (Standard)	1
▲	1270218	()	Blade Assy, Sqge, Rear [Primo] (Standard)	1
▲	1270216	()	Blade Assy, Sqge, Front [Primo] (Standard)	1
▽	9023323	()	Blades, Sqge, Rear, Linatex [X6 Rovr] (Option)	1
▲	1270211	()	Blade Assy, Sqge, Rear, [Linatex] (Option)	1
▲	1270210	()	Blade Assy, Sqge, Front, Linatex [28in] (Option)	1
▽	9023322	()	Blades, Sqge, Rear, Ure [X6 Rovr] (Option)	1
▲	1263849	()	Blade Assy, Sqge, Front, Ure [28in] (Option)	1
▲	1263846	()	Blade Assy, Sqge, Rear, Ure [28in] (Option)	1
▽	9023400	()	Side Sqge Blades, Primo [X6 Rovr] (Standard)	1
▲	1271415	()	Blade, Sqge, Side [Primo] (Standard)	2
▽	9023324	()	Blades, Sqge, Side, Linatex [X6 Rovr] (Option)	1
▲	1272100	()	Blade, Sqge, Side [Linatex] (Option)	2

NA = North America

EMEA = Europe, Middle East, and Africa

AUS = Australia

▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

RECOMMENDED MAINTENANCE ITEMS

GENERAL RECOMMENDED MAINTENANCE ITEMS

	Part No.	Serial Number	Description	Qty.
▽	1264090	()	Motor, Ele, 24vdc 220rpm 230w	2
▲	9023526	()	Motor Kit, Brushes [X4/X6] (Kit = Qty 4)	1
	1231238	()	Key, Sq, 5mm X 5mm X 22mm	2
	4033214	()	Seal, Bulb, Str, Snap- In, 5.6ft [T2, T3]	1
▽	1270192	()	Hose Assy, Drain, 1.5d 22.5l 2/1.5cap Pvc	1
▲	1218955	()	Cap, Drain Assy [Black]	1
	1264023	()	Strainer, 1.75 D (Recovery Tank)	1
	1212430	()	Sensor, Level, Liq, 30watt, Spst (Recovery Tank)	1
▽	9016755	()	Fan Kit, Vacuum, Ci [T350/Ss350]	1
▲	1206774	()	Vr, Brush Kit, Motor, Fan	1
▲	100038	()	Gasket, .50, 02.63id 05.75od, Adh [Epdm]	1
▲	1052126	()	Inductor, 12.7mmid [156 Imp At 25mhz]	1
	1250198	()	Sensor, Level, Liq, 14vdc, 01a (Solution Tank)	1
	1257341	()	Wheel, Scrbr, 156mm, W/ Taper	2
	9023472*	()	Motor, Drive, 17vac, W/Encd, Afmkt	2
	1021167	()	Key, Woodruff, 5mm	2
	1212422	()	Caster, Swivel	2
	1270304	()	Hose Assy, Sqge, Rear, 1.50 Dia 41.32"	1
	1264789	()	Pump, Soltn, Ele, 24vdc, 35 Psi	1
▽	1211537	()	Filter, In- Line [80 Mesh, Fine, White]	1
▲	1218885	()	Gasket [Epdm, F/1211537]	1
▲	1218883	()	Screen, Fltr, 80 Mesh, Ss [Fine, White]	1
▲	613991	()	Bowl, Clr, Short, F/1005302	1
	1259795	()	Speaker, 8ohm, 10w, 3.1 Od	1
	1064038	()	Gauge, Hourmeter, 05- 277 Volt, Ac / Dc	1
▽	1240354	()	Switch, Key (Includes Qty 2 Keys)	1
▲	1240918	()	Key, Switch	1
	1242161	()	Switch, Safety, Shutoff	1


* Requires Tennant *True* service or an authorized Tennant service provider.

▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

BRUSHES AND PAD DRIVER GROUP, 13 IN / 330MM DISK MAGNETIC HUB (NA / AUS)

358114

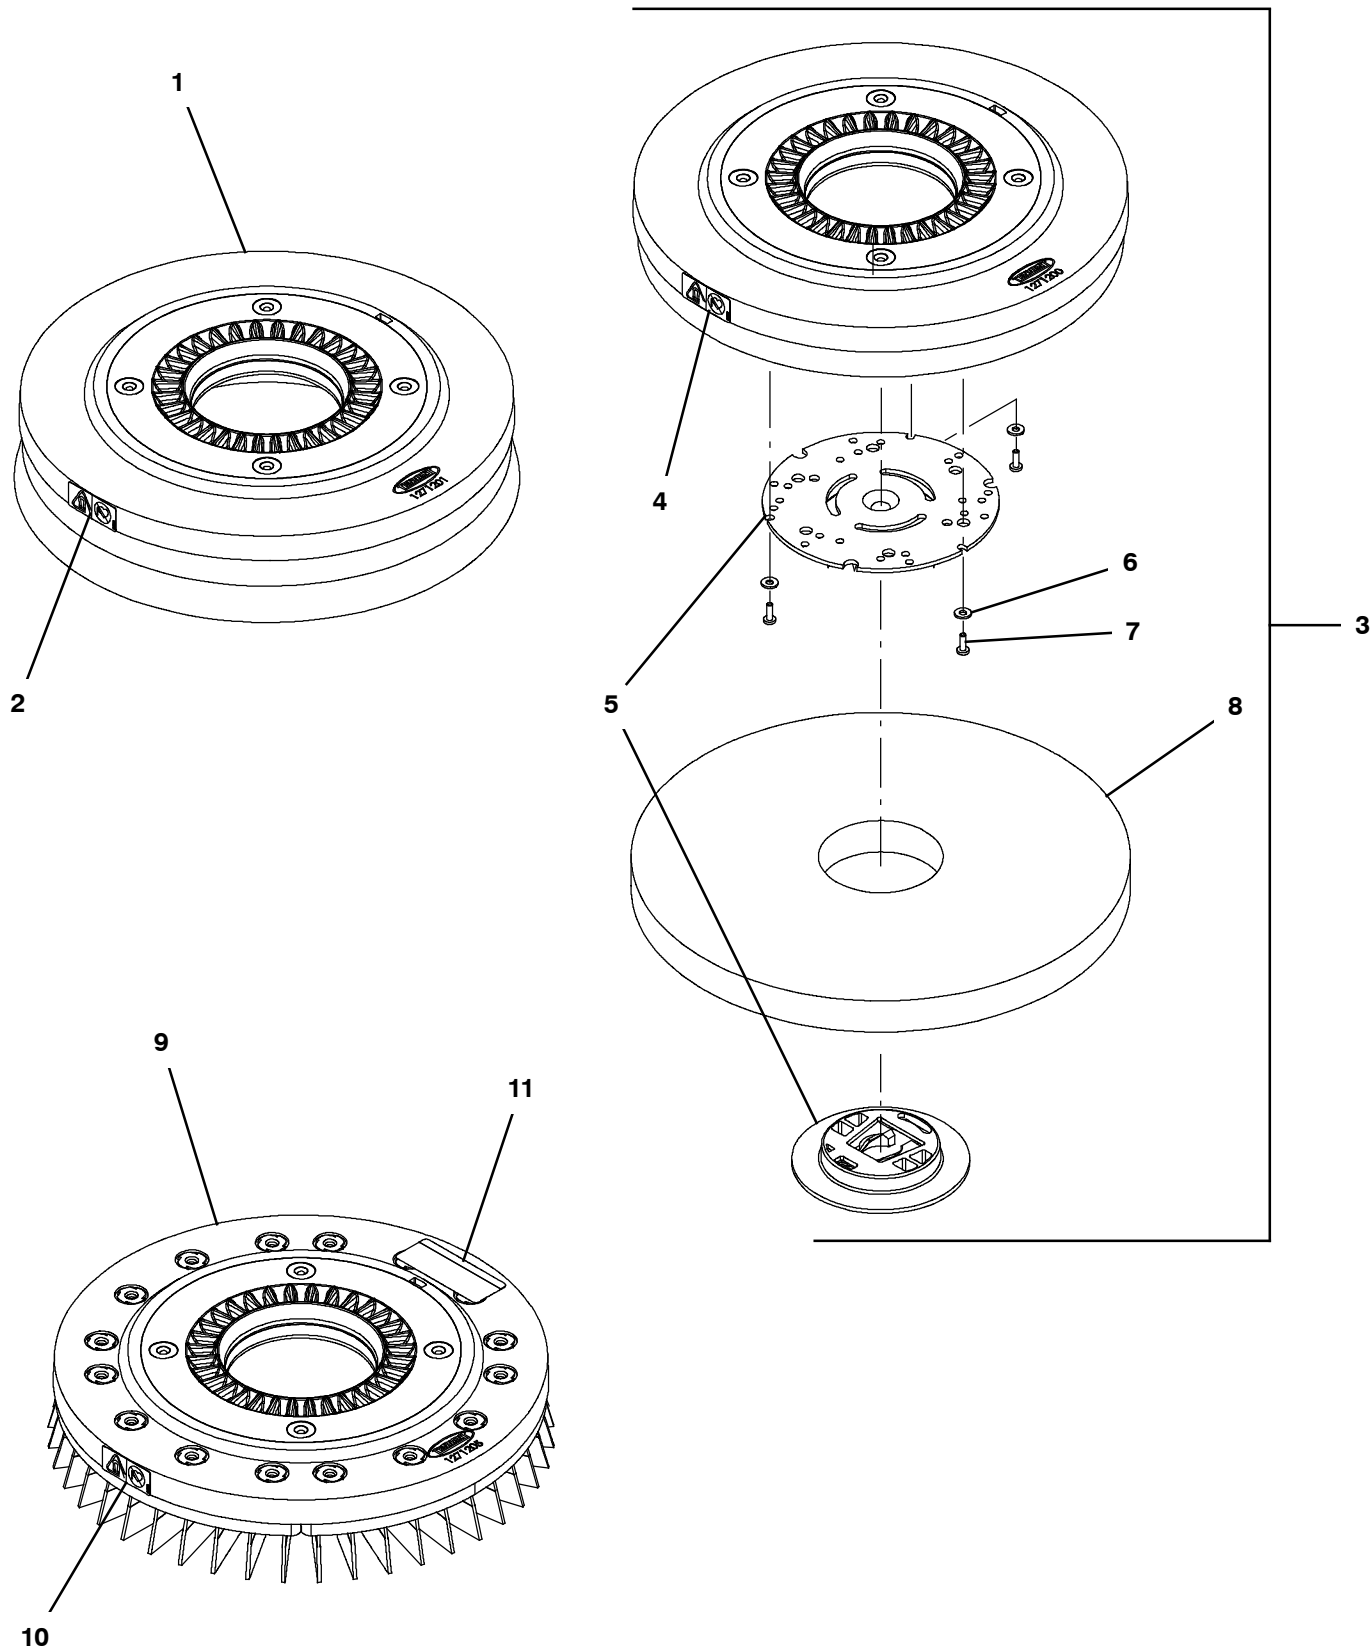

BRUSHES AND PAD DRIVER GROUP, 13 IN / 330MM DISK MAGNETIC HUB (NA / AUS)

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	1271199	()	Brush Assy, Disk, Scb, 13.0d, Nyl [Mag] (Standard)	2
▲	2	1218392	()	Label, Safety, Magnet, Med	1
▽	1	1271201	()	Brush Assy, Disk, Scb, 13.0d, Pyp [Mag] (Option)	2
▲	2	1218392	()	Label, Safety, Magnet, Med	1
▽	1	1271203	()	Brush Assy, Disk, Scb, 13.0d, Abr [Mag] (Option)	2
▲	2	1218392	()	Label, Safety, Magnet, Med	1
▽	3	1271200	()	Driver, Pad, 13.0d [Mag]	2
▲	4	1218392	()	Label, Safety, Magnet, Med	1
▲	5	4032342	()	Device, Centering, Clip On, TI [Gf Pp]	1
▲	6	41579	()	Washer, Flat, 08, Ss	3
▲	7	1212542	()	Screw, Pan, Phl, M4 X 0.70 X 12, NI, Ss	3
	8	1243341	()	Pad, Buff, 13.0d, Red [1pick=1ctn] (Standard)	2
	8	1243342	()	Pad, Polish, 13.0d, White [1pick=1ctn] (Option)	2
	8	1243655	()	Pad, Scb, 13.0d Blu [1pick=1ctn] (Option)	2
	8	1243567	()	Pad, Stripping, 13.0d, Brn [1pick=1ctn] (Option)	2
	8	1243666	()	Pad, Surf Prep, 13.0d Maroon[1pick=1ctn] (Option)	2
	8	1240356	()	Pad, Polish, 13.0d, Yel [1pick=1ctn] (Option)	2
▽	9	1271205	()	Disk, Polish, 13.0d, 1000grit [Db Mag] (Option - NA Only)	2
▲	10	1218392	()	Label, Safety, Magnet, Med	1
▲	11	1261613	()	Label, Warning	1
▽	9	1271206	()	Disk, Polish, 13.0d, 2000grit [Db Mag] (Option - NA Only)	2
▲	10	1218392	()	Label, Safety, Magnet, Med	1
▲	11	1261613	()	Label, Warning	1

NA = North America


AUS = Australia

▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

BRUSHES AND PAD DRIVER GROUP, 13 IN / 330MM DISK MAGNETIC HUB (EMEA)

358163

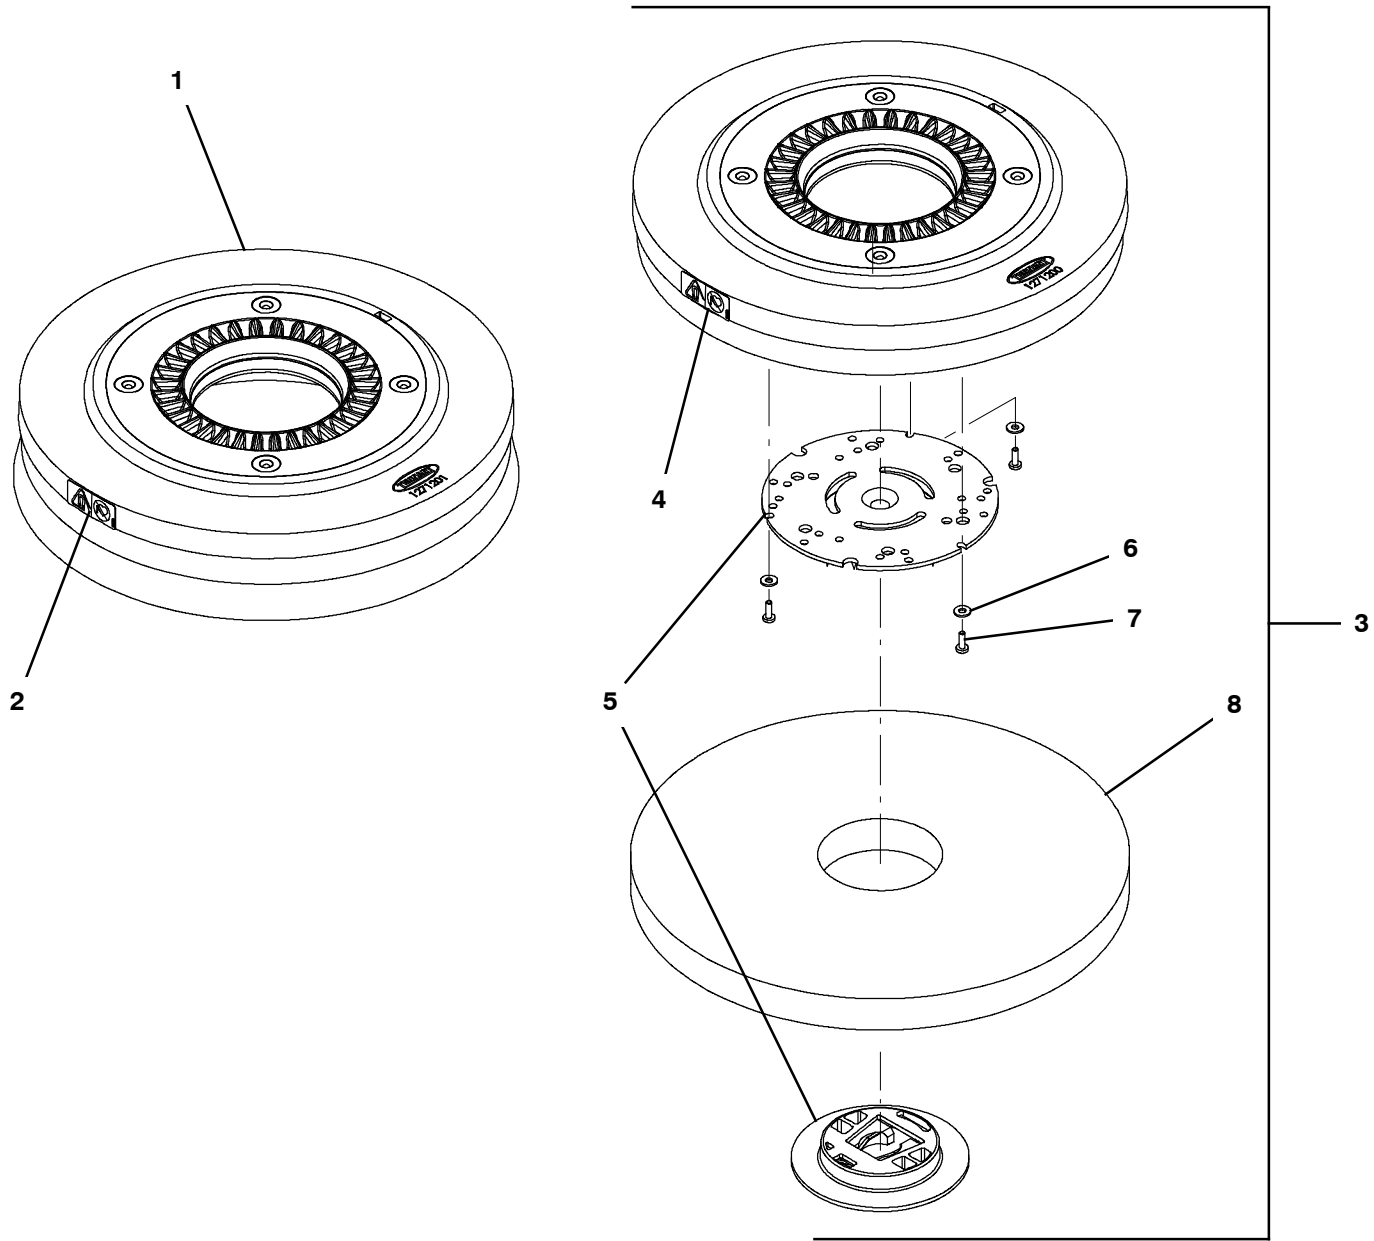

BRUSHES AND PAD DRIVER GROUP, 13 IN / 330MM DISK MAGNETIC HUB (EMEA)

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	1271199	()	Brush Assy, Disk, Scb, 13.0d, Nyl [Mag] (Standard)	2
▲	2	1218392	()	Label, Safety, Magnet, Med	1
▽	1	1271201	()	Brush Assy, Disk, Scb, 13.0d, Pyp [Mag] (Option)	2
▲	2	1218392	()	Label, Safety, Magnet, Med	1
▽	1	1271203	()	Brush Assy, Disk, Scb, 13.0d, Abr [Mag] (Option)	2
▲	2	1218392	()	Label, Safety, Magnet, Med	1
▽	3	1271200	()	Driver, Pad, 13.0d [Mag]	2
▲	4	1218392	()	Label, Safety, Magnet, Med	1
▲	5	4032342	()	Device, Centering, Clip On, TI [Gf Pp]	1
▲	6	41579	()	Washer, Flat, 08, Ss	3
▲	7	1212542	()	Screw, Pan, Phl, M4 X 0.70 X 12, NI, Ss	3
	8	995610	()	Pad, Buff, 13.0/330, Red [3m, 5pc] (Standard)	2
	8	994516	()	Pad, Buff, 13.0/330, Red [5pc] (Option)	2
	8	994513	()	Pad, Polish, 13.0/330, White [5pc] (Option)	2
	8	995618	()	Pad, Scb, 13.0inch /330 [3m Blu, 5pc] (Option)	2
	8	994515	()	Pad, Scb, 13.0inch /330, Blu [5pc] (Option)	2
	8	995625	()	Pad, Stripping, 13.0/330, Brown[3m, 5pc] (Option)	2
	8	994514	()	Pad, Stripping, 13.0/330, Brown[5pc] (Option)	2
	8	1243666	()	Pad, Surf Prep, 13.0d Maroon[1pick=1ctn] (Option)	2


EMEA = Europe, Middle East, and Africa

▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

SCRUB HEAD GROUP, DISK 13 INCH / 330MM MAGNETIC HUB

358115

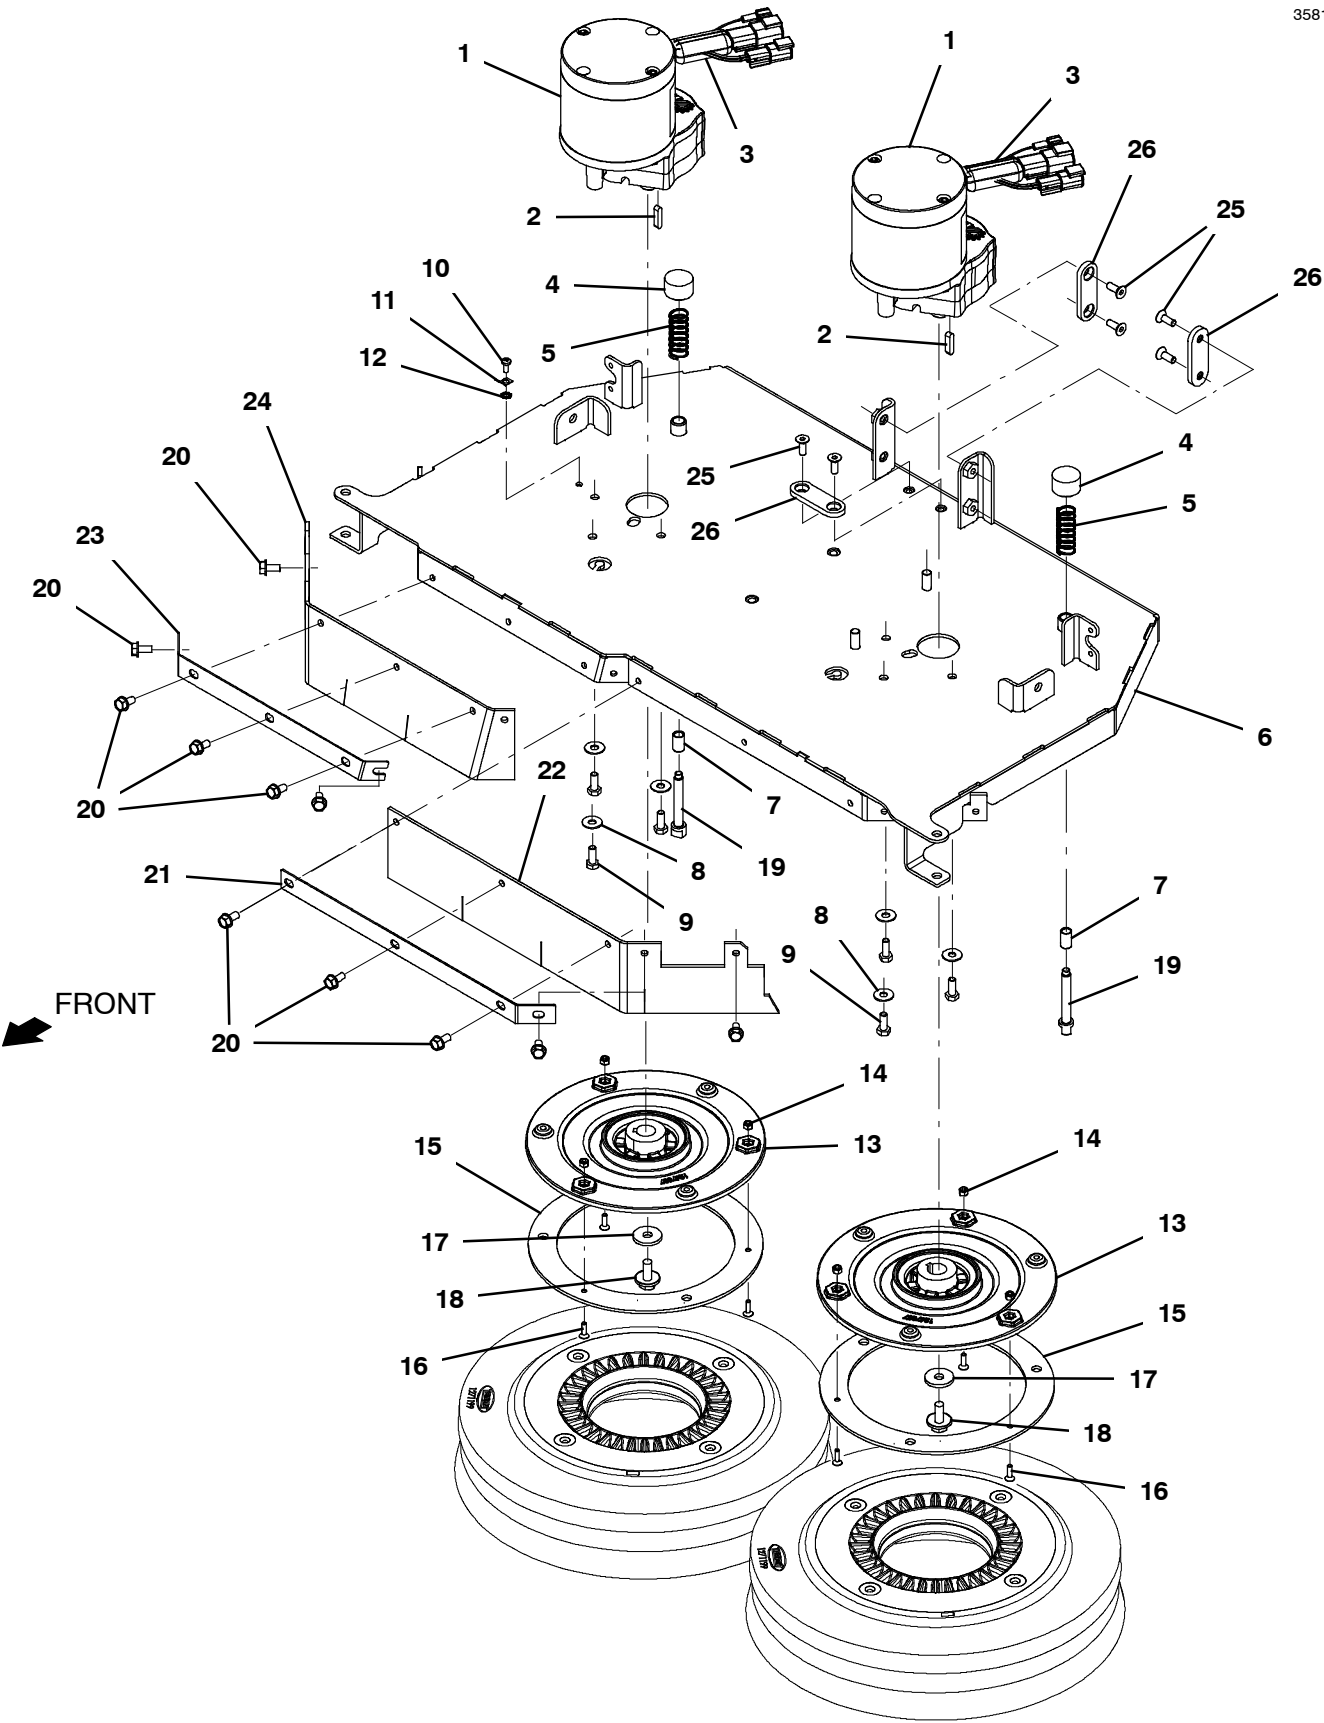

SCRUB HEAD GROUP, DISK 13 INCH / 330MM MAGNETIC HUB


	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	1264090	()	Motor, Ele, 24vdc 220rpm 230w	2
▲		9023526	()	Motor Kit, Brushes [X4/X6] (Kit = Qty 4)	1
	2	1231238	()	Key, Sq, 5mm X 5mm X 22mm	2
	3	1227867	()	Inductor, Ferrite [Split Case,407@100hz]	4
	4	1267627	()	Bumper, Rbr, 25.0d 15.0h, M6 X 1.0	2
	5	1212785	()	Spring, Cmpr, .66od, .05wir, 1.75l, Ss	2
▽	6	1276636	()	Head Wldt, Scrub [26in]	1
▲	7	1267429	()	Sleeve, 8mmb 10mmd 16mml	2
	8	01684	()	Washer, Flat, 0.27b 0.69d .05, Ss	6
	9	11329	()	Screw, Hex, M6 X 1.00 X 16, NI, Ss	6
	10	49697	()	Screw, Pan, Phl, M4 X 0.70 X 10, Ss	1
	11	1252199	()	Terminal, Spade [Faston]	1
	12	140061	()	Washer, Lock, Ext, 08, PI	1
▽	13	9023033	()	Motor Hub Repair Kit, Afrmkt	2
▲	14	33932	()	Nut, Hex, Lock, M4 X 0.70, NI, Ss	6
▲	15	1205043	()	Ring, Hub, Magnetic	2
▲	16	1227670	()	Screw, Flt, Soc, M4 X 0.70 X 14, 18- 8, Ss	6
	17	1017218	()	Washer, Flat, 0.32b 1.00d .12, Ss	2
	18	1020341	()	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	2
	19	1264575	()	Pin, Stop	2
	20	1075288	()	Screw, Hex, M6 X 1.00 X 12, Fmg Ss	11
	21	1273715	()	Plate, Skirt, Lh	1
	22	1273703	()	Skirt, Front, Lh	1
	23	1273716	()	Plate, Skirt, Rh	1
	24	1273709	()	Skirt, Front, Rh	1
	25	09163	()	Screw, Flt, Soc, M6 X 1.00 X 16, 18- 8, Ss	6
	26	1271784	()	Block, Stop, Sqge, Rear	3

▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

SCRUB HEAD LINKAGE GROUP

358116

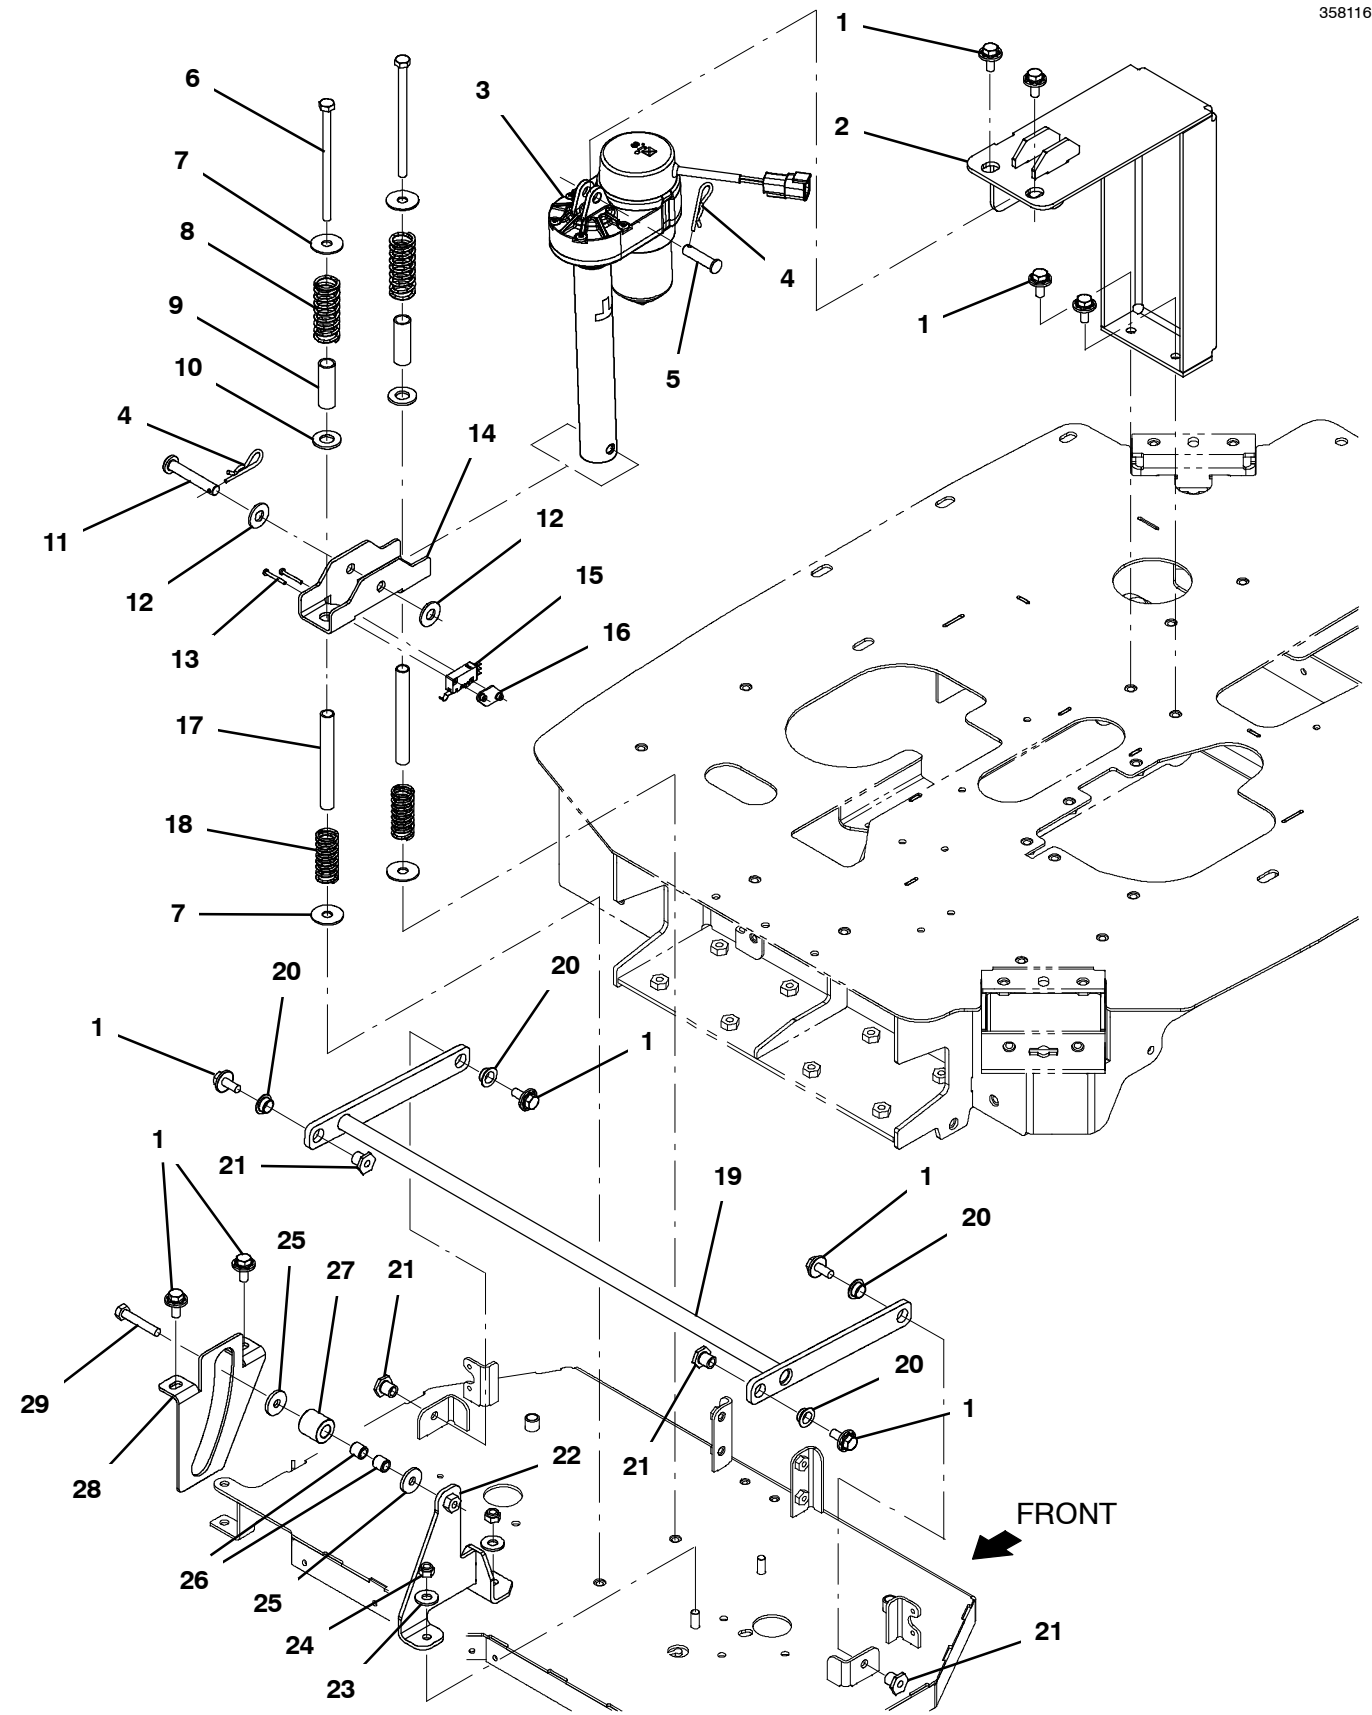

SCRUB HEAD LINKAGE GROUP


Ref.	Part No.	Serial Number	Description	Qty.	
1	1020341	()	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	10	
2	1269943	()	Bracket Wldt, Mtg, Actuator	1	
3	1271838	()	Actuator, 24vdc, 6.46 Strk	1	
4	140626	()	Pin, Cotter, Hair, 0.25d .125 Wir	2	
5	1009356	()	Pin, Clevis, 10mmd X 040mml	1	
6	387431	()	Screw, Hex, M8 X 1.25 X 130, Ss	2	
7	32662	()	Washer, Flat, 0.38b 1.22d .06, Ss	4	
8	45261	()	Spring, Cmpr, 0.97od .11wir 02.5l	2	
9	1273273	()	Sleeve, 0.51b 0.63d 1.89l, Pl	2	
10	32486	()	Washer, Flat, 0.53b 1.06d .10, Stl, Pl	2	
11	1252361	()	Pin, Clevis, 10mmd X 60mml	1	
12	01686	()	Washer, Flat, 0.44b 1.00d .08, Ss	2	
13	33933	()	Screw, Pan, Phl, M3 X 1.50 X 25, Ss	2	
14	1270326	()	Bracket, Spring, Head	1	
15	1264508	()	Switch, Micro, 0.1a, Spdt, Ip67, Au	1	
16	1013705	()	Plate, Thread, Switch, M3 Nut, 96hr Pl	1	
17	1219491	()	Sleeve, 0.40id .50d 4.25l, Ss	2	
18	63185	()	Spring, Cmpr, 0.85od .09wir 02.0l	2	
▽	19	9023449	()	Lift Arm Kit, Afmkt [X6 W/ Bushings]	1
▲	20	1225660	()	Bushing, Flng, 12.0b 7.0l 14.0d, Plstc	4
21	1266672	()	Nut, T, M8 12mmd 12mml	4	
22	1276640	()	Brkt Wldt, Roller	1	
23	01685	()	Washer, Flat, 0.38b 0.88d .08, Ss	2	
24	08713	()	Nut, Hex, Lock, M8 X 1.25, NI, Ss	2	
25	1017218	()	Washer, Flat, 0.32b 1.00d .12, Ss	2	
26	222460	()	Sleeve, P/M, 0.32b 0.50d 0.5l [430ss]	2	
27	1014020	()	Roller, 0.99d 0.50b 0.95l, Acetal	1	
28	1269694	()	Plate, Guide, Head	1	
29	222505	()	Screw, Hex, M8 X 1.25 X 45, Ss	1	

▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

FRONT AND TOP SHROUD GROUP

358113

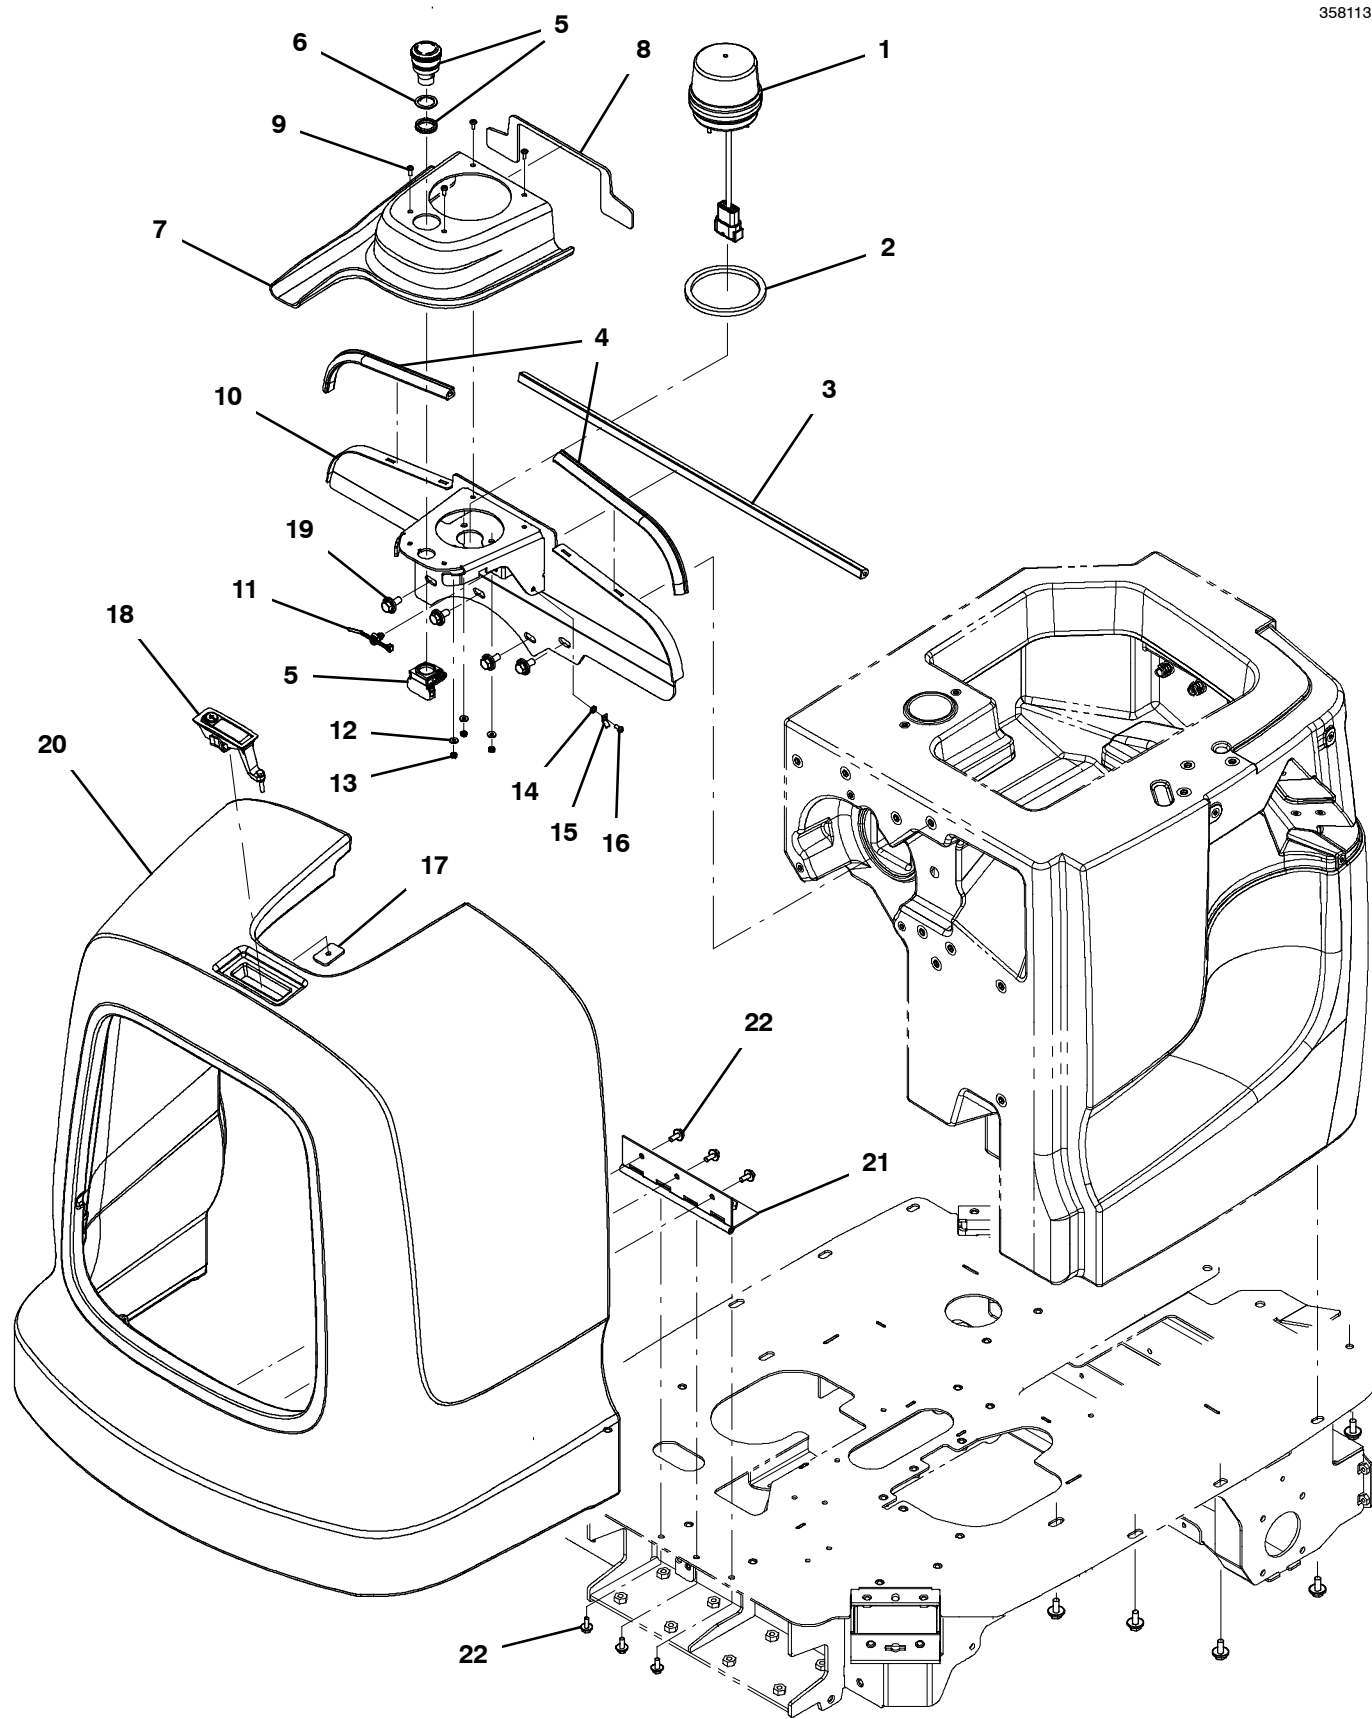


FRONT AND TOP SHROUD GROUP

Ref.	Part No.	Serial Number	Description	Qty.
1	1265390	()	Beacon Assy, Color, 3.8d	1
2	1265924	()	Gasket, Beacon	1
3	1001889	()	Seal, .50, .50w 32.1l, Adh [D Shape]	1
4	1020722	()	Seal, Afmkt, Bulb, Clsd Cell, Adh, 01ft	2
5	1242161	()	Switch, Safety, Shutoff	1
6	1242538	()	Ring, Lock, E- Stop	1
7	9023378	()	Label, Kit, Cowling, Afkmt [X6]	1
8	1271212	()	Gasket, Cover, Top	1
9	1069315	()	Screw, Pan, Phl, M4 X 0.70 X 10, Blk	4
10	9023379	()	Plate, Baffle Wldt, Afmkt [X6]	1
11	1210807	()	Wire, Tie [W/.25" Fir Tree Clip]	1
12	41579	()	Washer, Flat, 08, Ss	3
13	1007109	()	Nut, Hex, Lock, M4 X 0.70, Kep, Ext	3
14	140061	()	Washer, Lock, Ext, 08, Pl	1
15	1252199	()	Terminal, Spade [Faston]	1
16	49697	()	Screw, Pan, Phl, M4 X 0.70 X 10, Ss	1
17	1208748	()	Plate, Latch [T17]	1
18	1265009	()	Latch, Lock, Phl	1
19	1020341	()	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	4
20	9023374	()	Shroud, Front, Afmkt [X6]	1
21	1262252	()	Hinge Wldt, Shrd, Front	1
22	1034731	()	Screw, Hex, M6 X 1.00 X 16, Sems, Ss	6

RECOVERY TANK GROUP

358100

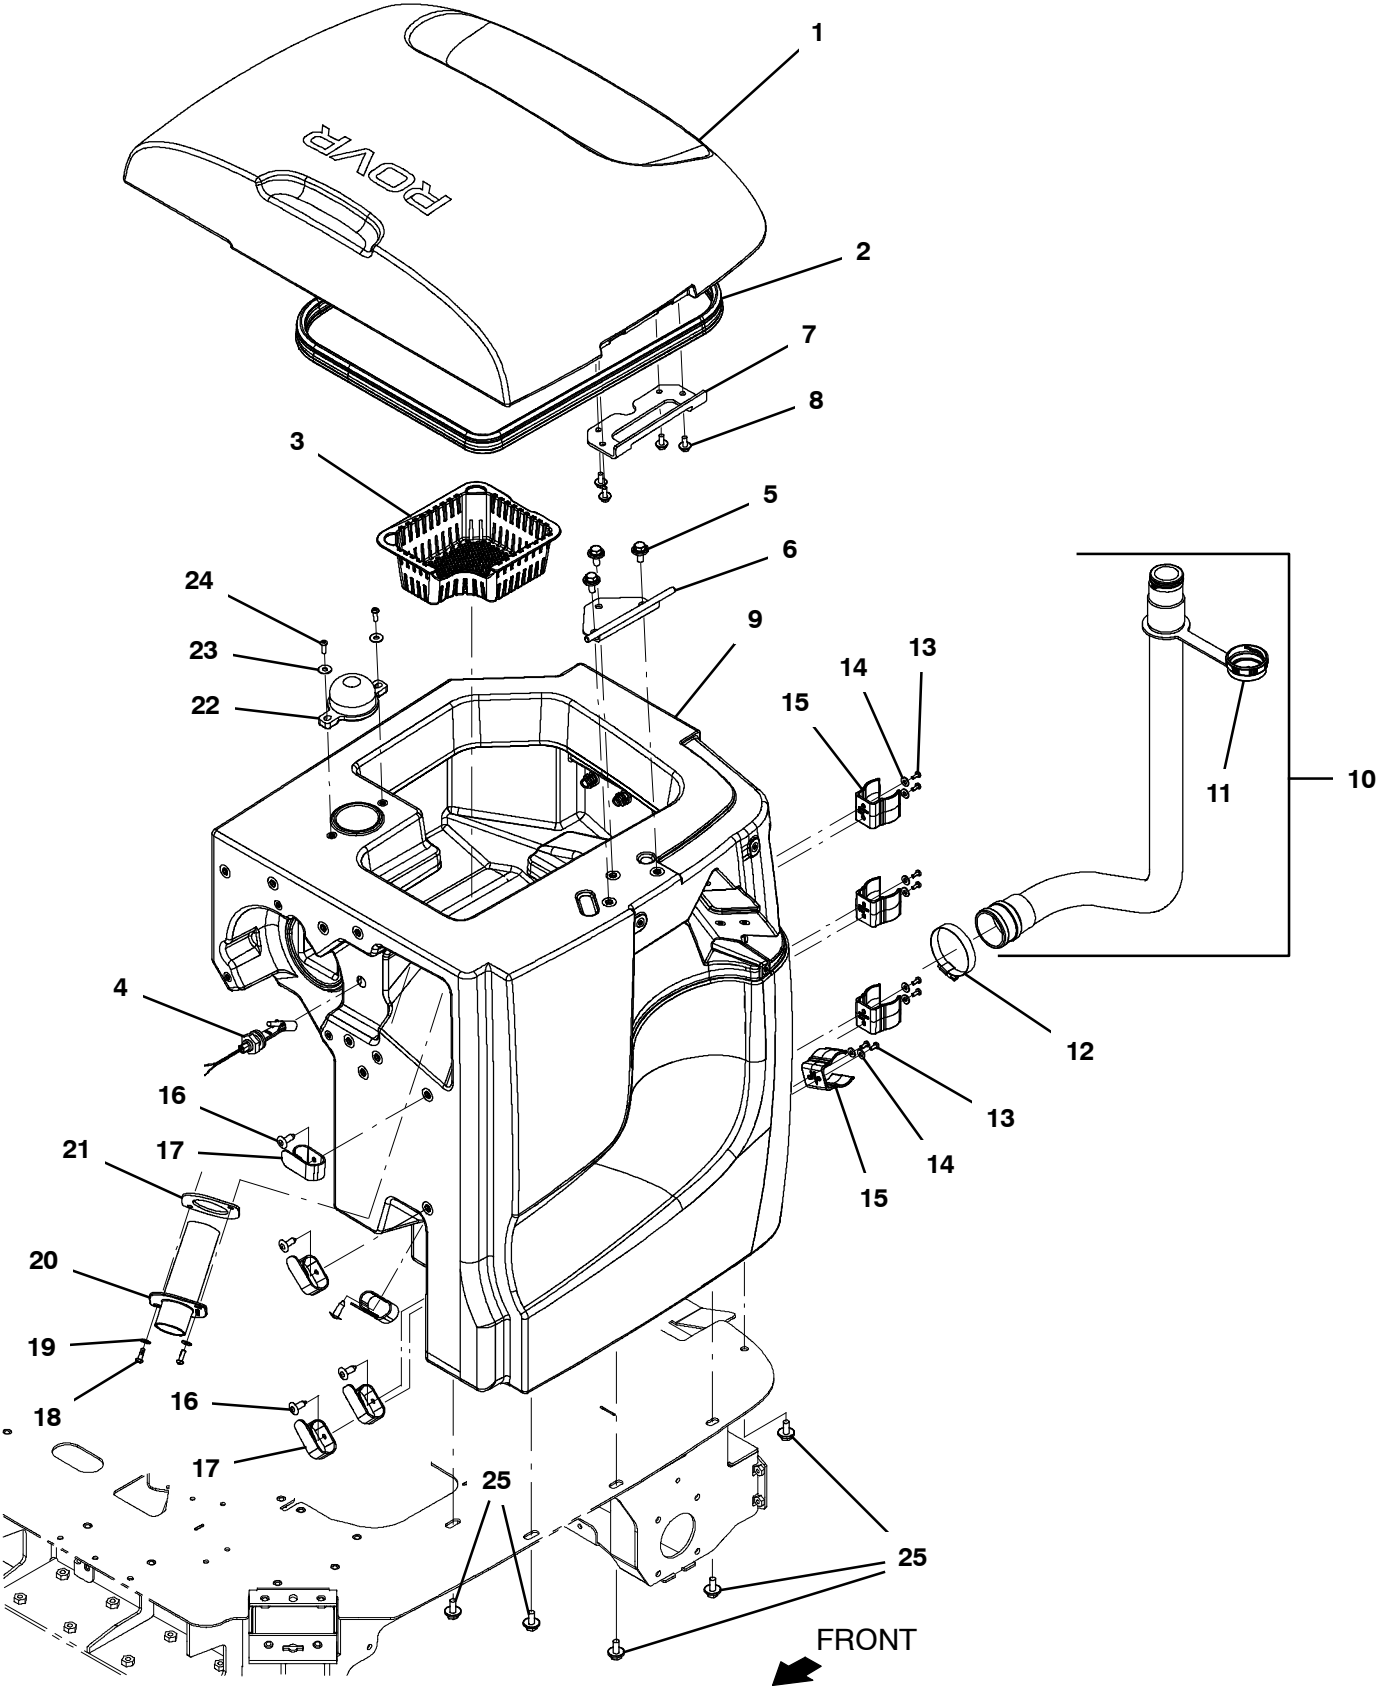

RECOVERY TANK GROUP

Ref.	Part No.	Serial Number	Description	Qty.	
1	9023492	()	Recovery Tank Lid, Afmkt [X6 Na] (NA / AUS)	1	
1	9023493	()	Recovery Tank Lid, Afmkt [X6 Ce] (EMEA)	1	
2	4033214	()	Seal, Bulb, Str, Snap- In, 5.6ft [T2, T3]	1	
3	1207357	()	Tray, Debris, Tank, Recvy [T300]	1	
4	1212430	()	Sensor, Level, Liq, 30watt, Spst	1	
5	1020341	()	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	3	
6	1270631	()	Bracket Wldt, Hinge	1	
7	1270630	()	Bracket, Retainer, Hinge	1	
8	1034731	()	Screw, Hex, M6 X 1.00 X 16, Sems, Ss	5	
9	9023490	()	Recovery Tank, Afmkt [X6 Na] (NA / AUS)	1	
▽	9	9023491	()	Recovery Tank, Afmkt [X6 Ce] (EMEA)	1
▲	10	1270192	()	Hose Assy, Drain,1.5d 22.5l 2/1.5cap Pvc	1
	11	1218955	()	Cap, Drain Assy [Black]	1
	12	14432	()	Clamp, Hose, Wormdrive, 1.81- 2.75d, .50w	1
	13	01683	()	Washer, Flat, 10, Ss	8
	14	49697	()	Screw, Pan, Phl, M4 X 0.70 X 10, Ss	8
	15	1265032	()	Clip, Hose, 1.7 Dia.	4
	16	140262	()	Clip, Snap- In	5
	17	1059534	()	Fastener, 09.00l [Hook & Loop]	5
	18	1205799	()	Screw, Btn, M5 X 0.8 X 16, 8.8, NI, Torx	2
	19	01683	()	Washer, Flat, 10, Ss	2
	20	1259496	()	Tube, Hose, Adapter 1.5d	1
	21	1259498	()	Gasket, Adapter, Hose, Neo	1
	22	1264023	()	Strainer, 1.75 D	1
	23	01684	()	Washer, Flat, 0.27b 0.69d .05, Ss	2
	24	1205799	()	Screw, Btn, M5 X 0.8 X 16, 8.8, NI, Torx	2
	25	1020341	()	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	5

NA = North America

EMEA = Europe, Middle East, and Africa


AUS = Australia

▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

VACUUM MOTOR GROUP

358102

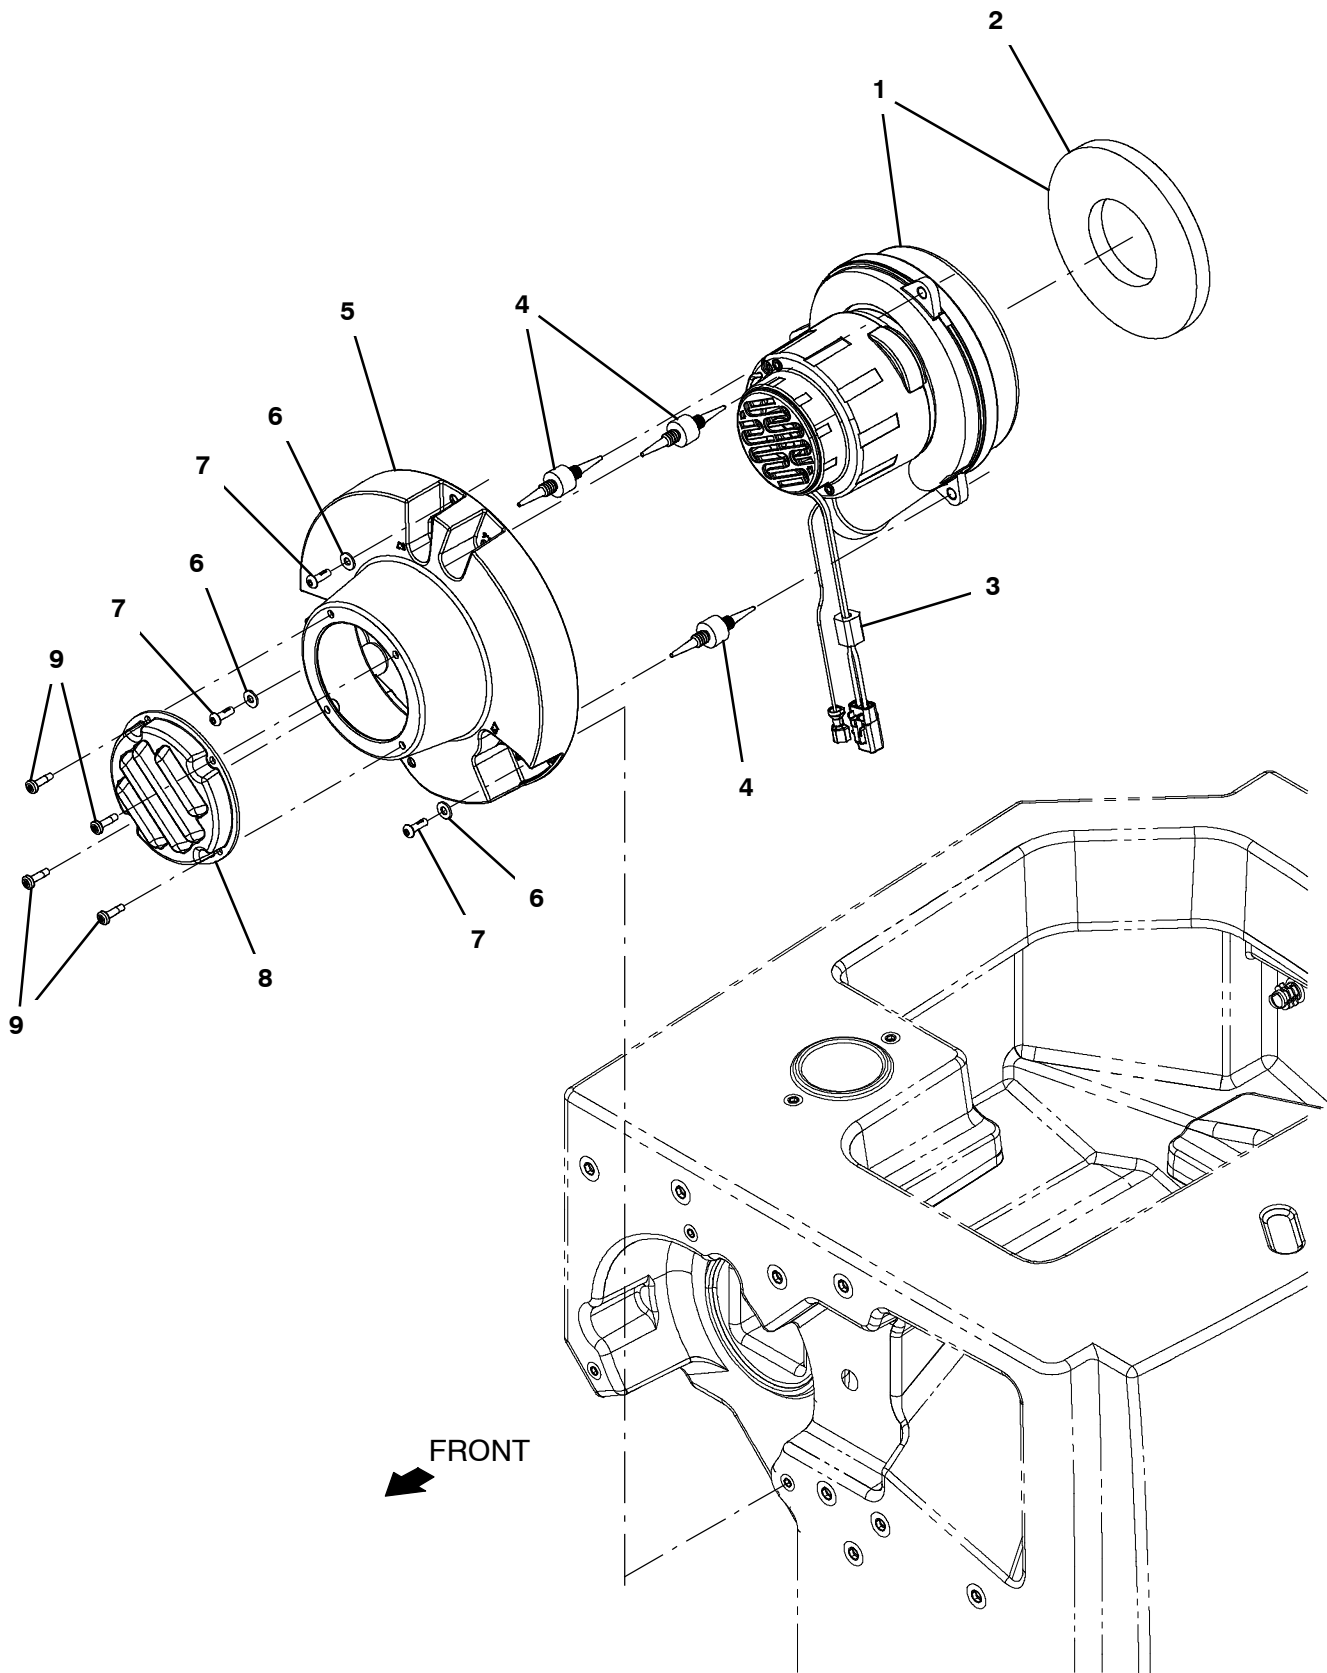

VACUUM MOTOR GROUP


	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	9016755	()	Fan Kit, Vacuum, Ci [T350/Ss350]	1
▲		1206774	()	Vr, Brush Kit, Motor, Fan	1
▲	2	100038	()	Gasket, .50, 02.63id 05.75od, Adh [Epdm]	1
▲	3	1052126	()	Inductor, 12.7mmid [156 Imp At 25mhz]	1
	4	1062016	()	Isolator, Vib, .75d	3
	5	1207368	()	Mount, Vacfan, 5.7/6.6	1
	6	01683	()	Washer, Flat, 10, Ss	3
	7	1205799	()	Screw, Btn, M5 X 0.8 X 16, 8.8, NI, Torx	3
	8	1209342	()	Cover, Inlet, Vac, Vented	1
	9	1043573	()	Screw, #10- 14 X 0.675, Spl[Shcs,Selftap]	4

▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

SOLUTION TANK GROUP

358101

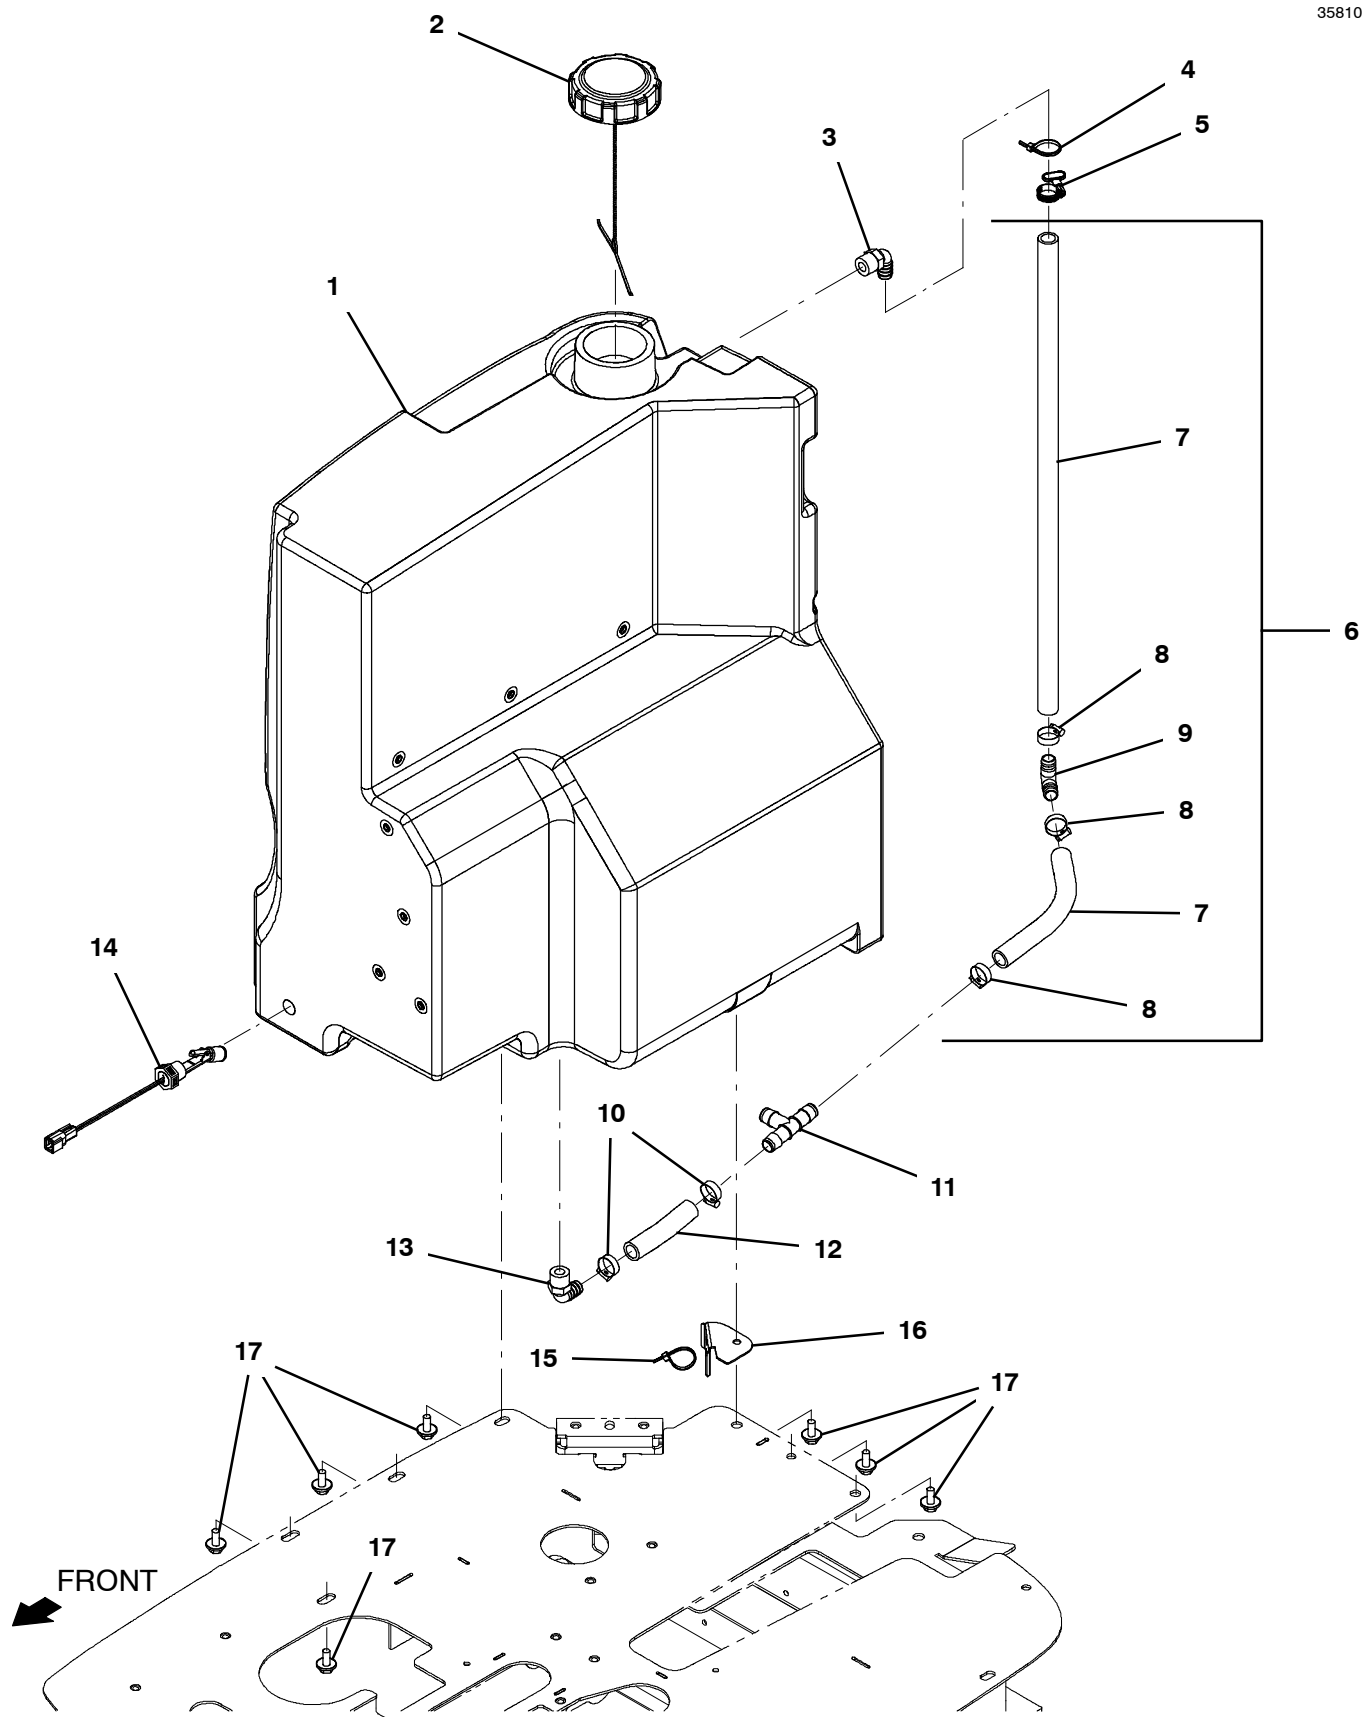

SOLUTION TANK GROUP

Ref.	Part No.	Serial Number	Description	Qty.	
1	9023488	()	Solution Tank, Afmkt [X6 Na] (NA / AUS)	1	
1	9023489	()	Solution Tank, Afmkt [X6 Ce] (EMEA)	1	
2	1011885	()	Cap, Tank	1	
3	630371	()	Fitting, Plstc, E90, Bm10/Pm08	1	
4	130773	()	Tie, Cable, Nyl, 11.0l, .14w, 3.0 Max. D	1	
▽ ▲ ▲ ▲ ▲	5	1272002	()	Clamp, Hose, Wormdrive, 0.38- 0.88d, T	1
	6	9023079	()	Sight Tube, Afmkt	1
	7	9002919	()	Hose, Pvc, Clr, 0.62id 0.88od, 36l Afmkt	1
	8	54333	()	Clamp, Hose, Wormdrive, 0.31- 0.88d, .31w	3
	9	391365	()	Fitting, Plstc, E90, Bm10/Bm10	1
10	54333	()	Clamp, Hose, Wormdrive, 0.31- 0.88d, .31w	2	
11	1062116	()	Fitting, Plstc, Tee, Bm10/Bm10/Bm10, Nyl	1	
12	1035355	()	Hose, Afmkt, Pvc, Clr, 0.62id, 02ft	1	
13	630371	()	Fitting, Plstc, E90, Bm10/Pm08	1	
14	1250198	()	Sensor, Level, Liq, 14vdc, 01a	1	
15	130773	()	Tie, Cable, Nyl, 11.0l, .14w, 3.0 Max. D	1	
16	1273667	()	Bracket, Mtg, Hose	1	
17	1020341	()	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	7	

NA = North America

EMEA = Europe, Middle East, and Africa


AUS = Australia

▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

FRAME AND DRIVE WHEEL GROUP

358094

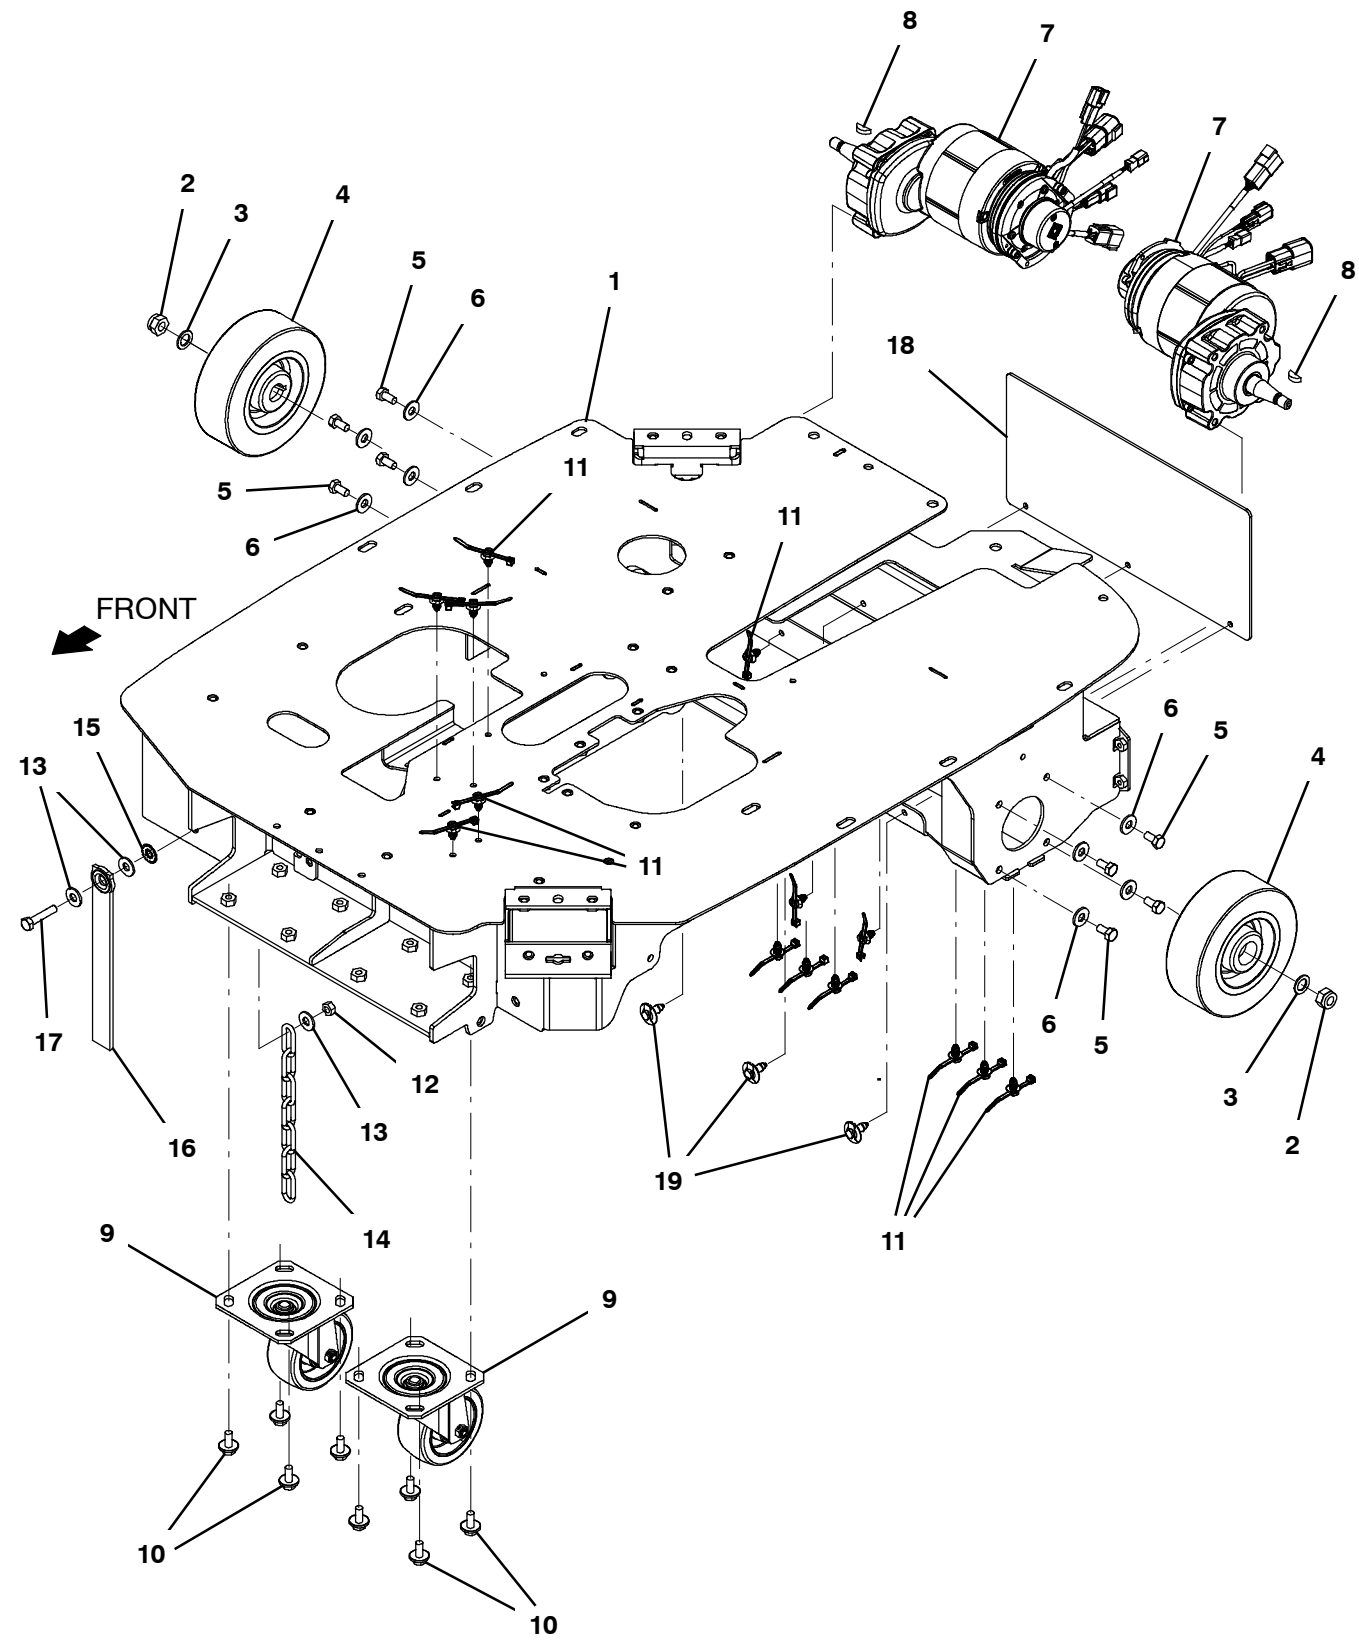

FRAME AND DRIVE WHEEL GROUP

Ref.	Part No.	Serial Number	Description	Qty.	
1	9023461*	()	Frame Kit, Afmkt [Na W/Labels] (NA / AUS)	1	
1	9023464*	()	Frame Kit, Afmkt [Ce W/Labels] (EMEA)	1	
2	08711	()	Nut, Hex, Lock, M12 X 1.75, NI	2	
3	140058	()	Washer, Flat, 0.54b 0.88d .06, Ss [Wand]	2	
4	1257341	()	Wheel, Scrbr, 156mm, W/ Taper	2	
▽ ▲ ▲ ▲ ▲	5	15675	()	Screw, Hex, M8 X 1.25 X 16, Ss	8
	6	01685	()	Washer, Flat, 0.38b 0.88d .08, Ss	8
	7	9023472*	()	Motor, Drive, 17vac, W/Encd, Afmkt	1
		9023091	()	Harness Kit, Drive, Rplmt [X4r]	1
		1269355	()	Vr, Cap, Brake [X4r]	1
		9023090	()	Brake Kit, Parking, Replmt [X4r]	1
		9023089	()	Sensor Kit, Encoder, Replmt [X4r]	1
	8	1021167	()	Key, Woodruff, 5mm	2
	9	1212422	()	Caster, Swivel	2
	10	1020341	()	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	8
11	1210807	()	Wire, Tie [W/.25" Fir Tree Clip]	9	
12	07786	()	Nut, Hex, Std, M8 X 1.25, Ss	1	
13	01685	()	Washer, Flat, 0.38b 0.88d .08, Ss	3	
14	43500	()	Chain, Coil, Str, #2/0, 09.0l 07 Link	1	
15	41141	()	Washer, Lock, Int- Ext, 0.31	1	
16	71579	()	Strap, Static, W/Grommet, .19 1.1w 25.0l	1	
17	74440	()	Screw, Hex, M8 X 1.25 X 40, NI, Ss	1	
18	4207292	(AUG2025-	)	Plate, Cover	1
19	4016302	(AUG2025-	)	Rivet, Plstc, .250d X 0.90	3

* Requires Tennant *True* service or an authorized Tennant service provider.


NA = North America

EMEA = Europe, Middle East, and Africa

AUS = Australia

FRONT CAMERA AND SENSOR GROUP

358095

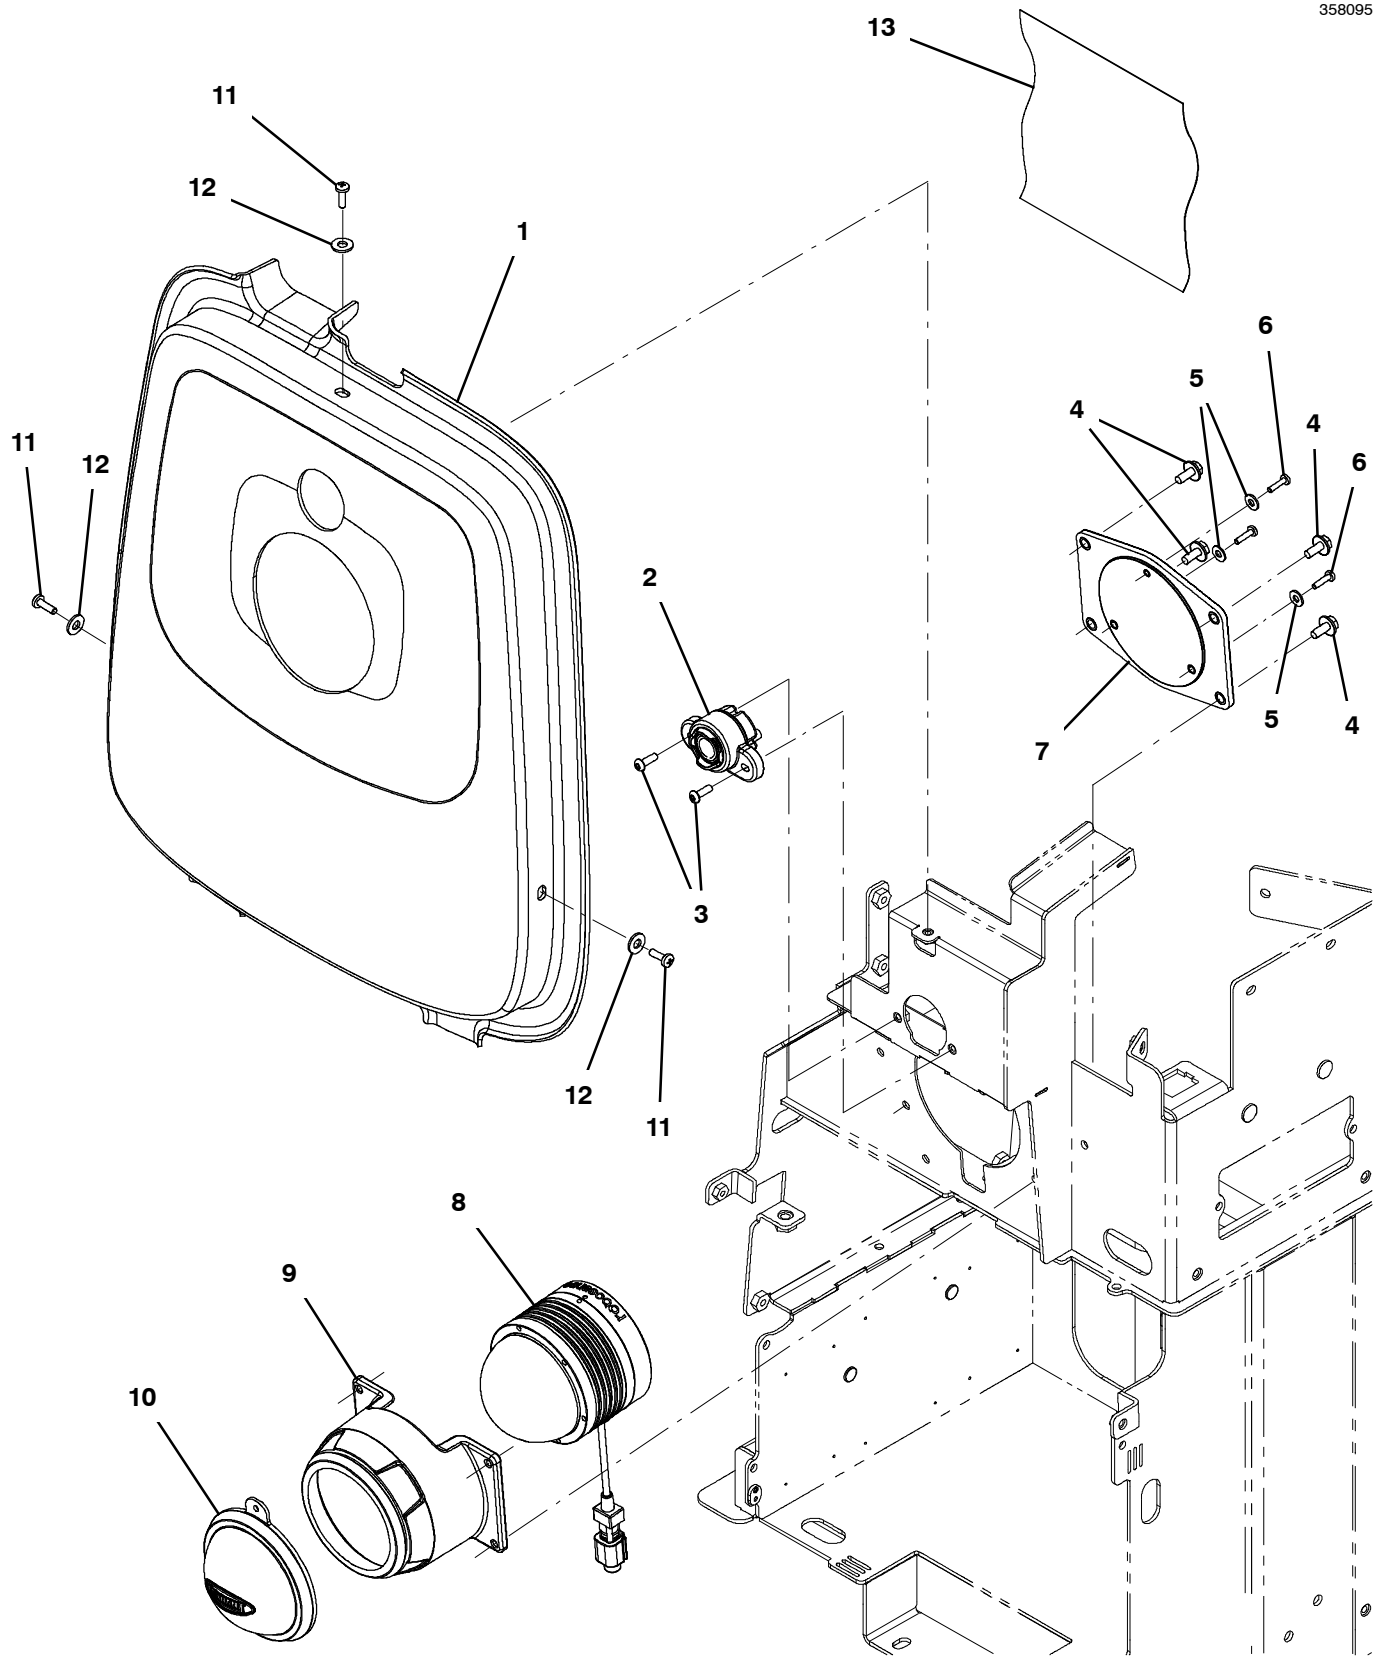


FRONT CAMERA AND SENSOR GROUP

Ref.	Part No.	Serial Number	Description	Qty.
1	9023375	()	Shroud, Front Sensor, Afmkt [X6]	1
2	9023044*	()	Sensor, Camera, Amr, Afmkt [2d]	1
3	1205799	()	Screw, Btn, M5 X 0.8 X 16, 8.8, NI, Torx	2
4	1034731	()	Screw, Hex, M6 X 1.00 X 16, Sems, Ss	4
5	01683	()	Washer, Flat, 10, Ss	3
6	579237	()	Screw, Pan, Phl, M4 X 0.70 X 12, Ss	3
7	1268110	()	Isolator, Sensor	1
8	9023042*	()	Sensor, Range, Amr, Afmkt [Bpearl]	1
9	1267500	()	Guard, Sensor	1
10	1268583	()	Cap, Sensor	1
11	1205799	()	Screw, Btn, M5 X 0.8 X 16, 8.8, NI, Torx	3
12	01684	()	Washer, Flat, 0.27b 0.69d .05, Ss	3
13	1267786	()	Cleaner, Cloth [Microfiber]	1

* Requires Tennant *True* service or an authorized Tennant service provider.

AMR SIGN MARKERS GROUP

358069

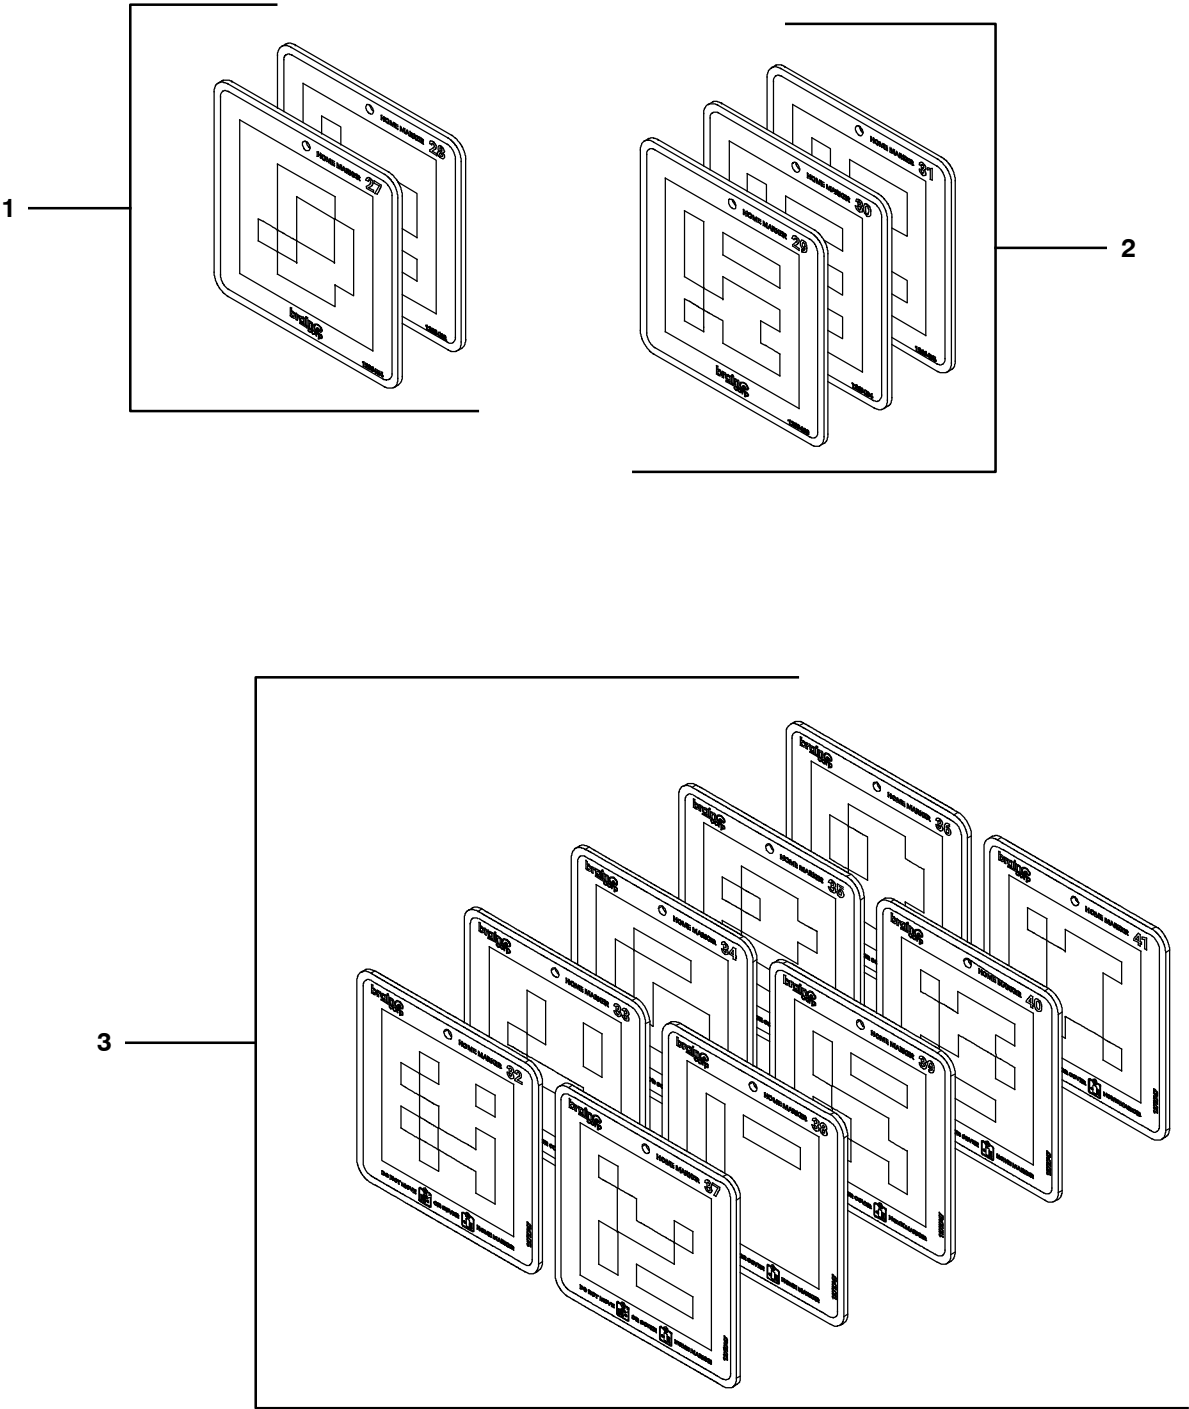


AMR SIGN MARKERS GROUP

Ref.	Part No.	Serial Number	Description	Qty.
1	1269500	()	Label Kit, Sign, Amr [Std] (Standard)	1
2	1269505	()	Label Kit, Sign, Amr [Ext] (Extended Option)	1
3	1272747	()	Label Kit, Sign, Amr [Ext10] (Extended Option)	1

UPPER CAMERA SENSOR GROUP, RIGHT

358095

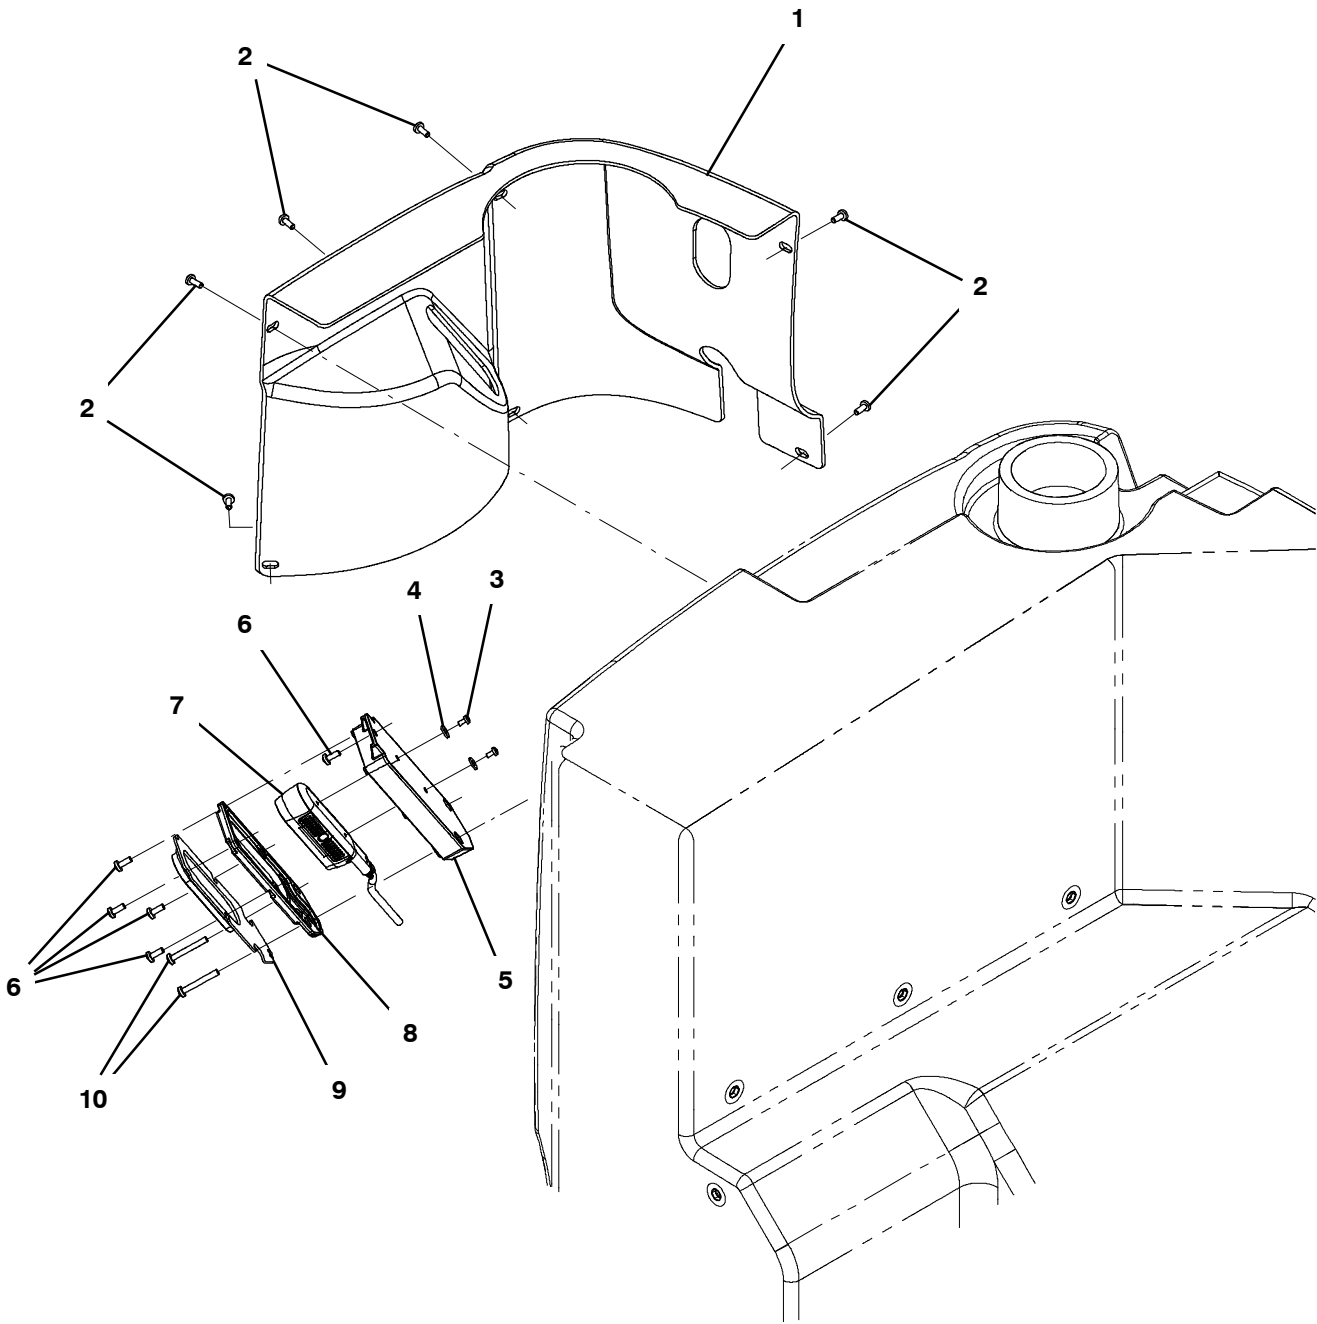


UPPER CAMERA SENSOR GROUP, RIGHT

Ref.	Part No.	Serial Number	Description	Qty.
1	9023376	()	Shroud, Rh Side, Kit, Afmkt [X6]	1
2	1069315	()	Screw, Pan, Phl, M4 X 0.70 X 10, Blk	6
3	06919	()	Screw, Pan, Phl, M3 X 0.50 X 6, 4.8	2
4	19064	()	Washer, Flat, 0.16b 0.38d .05, Pl, 06	2
5	1259949	()	Sensor Hsng, Bottom	1
6	49697	()	Screw, Pan, Phl, M4 X 0.70 X 10, Ss	5
7	9023045*	()	Sensor, Camera, Amr, Afmkt [3d]	1
8	1259972	()	Gasket, Sensor	1
9	1259950	()	Sensor Hsng, Top	1
10	33931	()	Screw, Pan, Phl, M4 X 0.70 X 30, Ss	2

* Requires Tennant *True* service or an authorized Tennant service provider.

UPPER CAMERA SENSOR GROUP, LEFT

358121

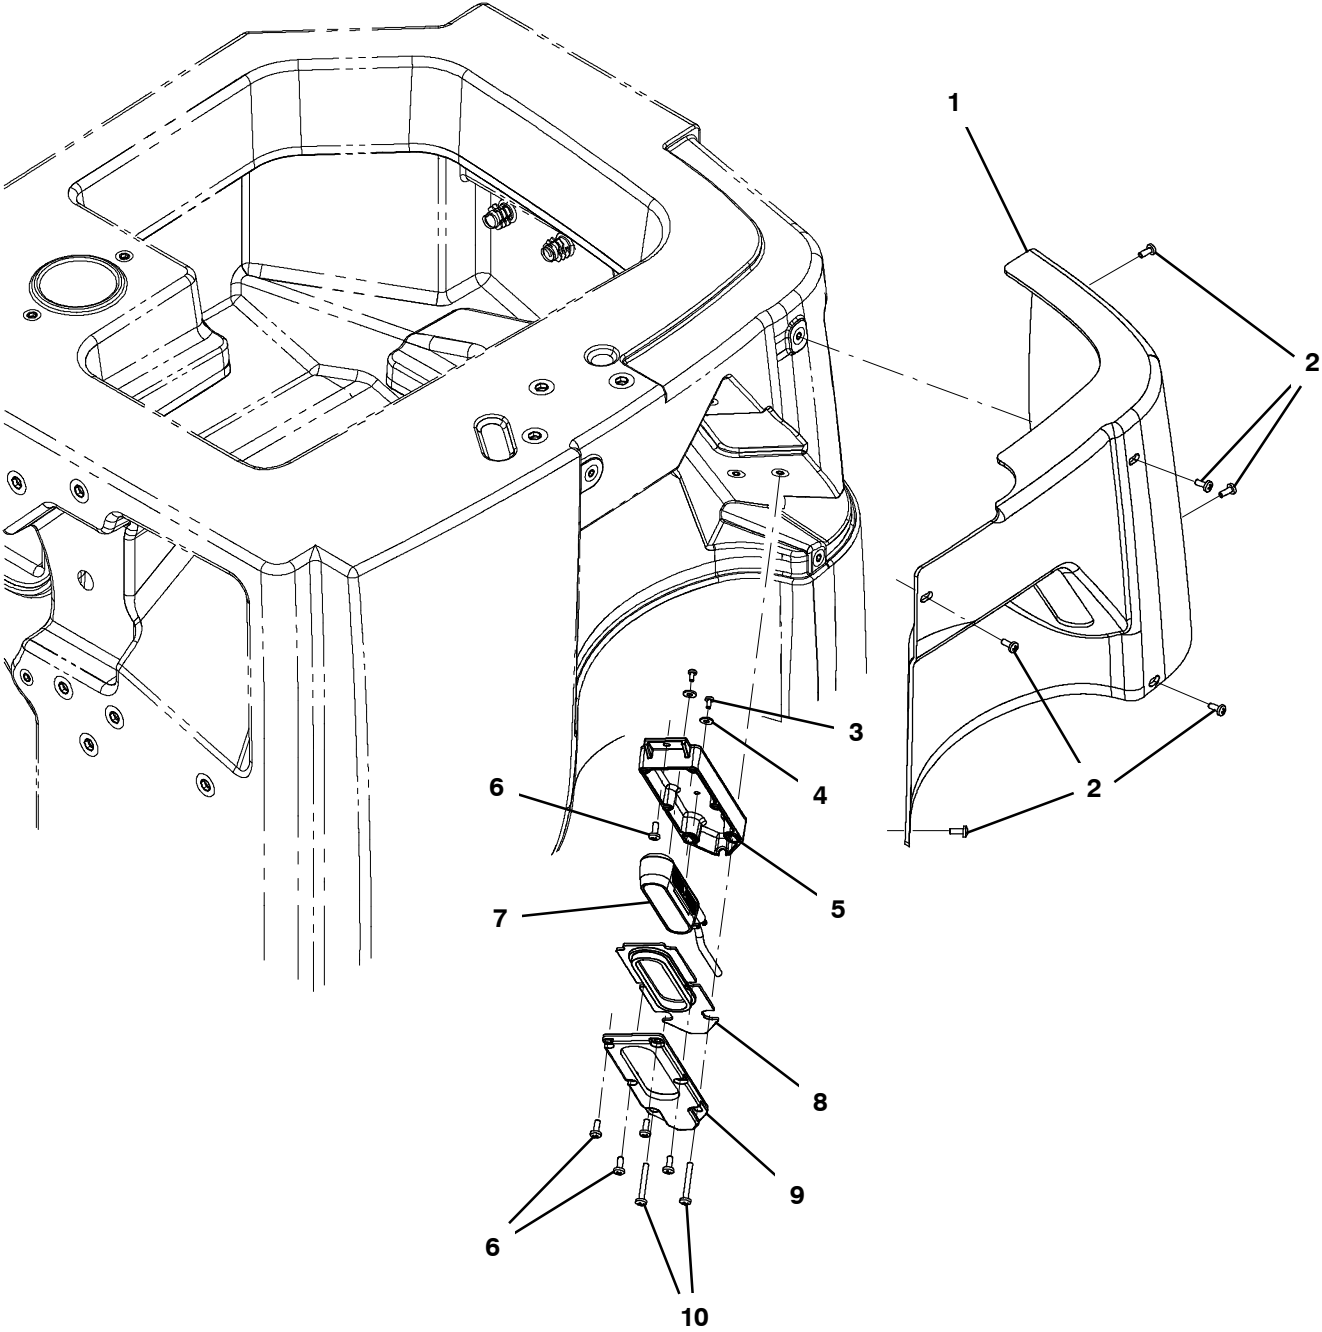


UPPER CAMERA SENSOR GROUP, LEFT

Ref.	Part No.	Serial Number	Description	Qty.
1	9023377	()	Shroud, Lh Side, Kit, Afmkt [X6]	1
2	1069315	()	Screw, Pan, Phl, M4 X 0.70 X 10, Blk	6
3	06919	()	Screw, Pan, Phl, M3 X 0.50 X 6, 4.8	2
4	19064	()	Washer, Flat, 0.16b 0.38d .05, Pl, 06	2
5	1259949	()	Sensor Hsng, Bottom	1
6	49697	()	Screw, Pan, Phl, M4 X 0.70 X 10, Ss	5
7	9023045*	()	Sensor, Camera, Amr, Afmkt [3d]	1
8	1259972	()	Gasket, Sensor	1
9	1259950	()	Sensor Hsng, Top	1
10	33931	()	Screw, Pan, Phl, M4 X 0.70 X 30, Ss	2

* Requires Tennant *True* service or an authorized Tennant service provider.

LOWER CAMERA SENSOR GROUP

358097

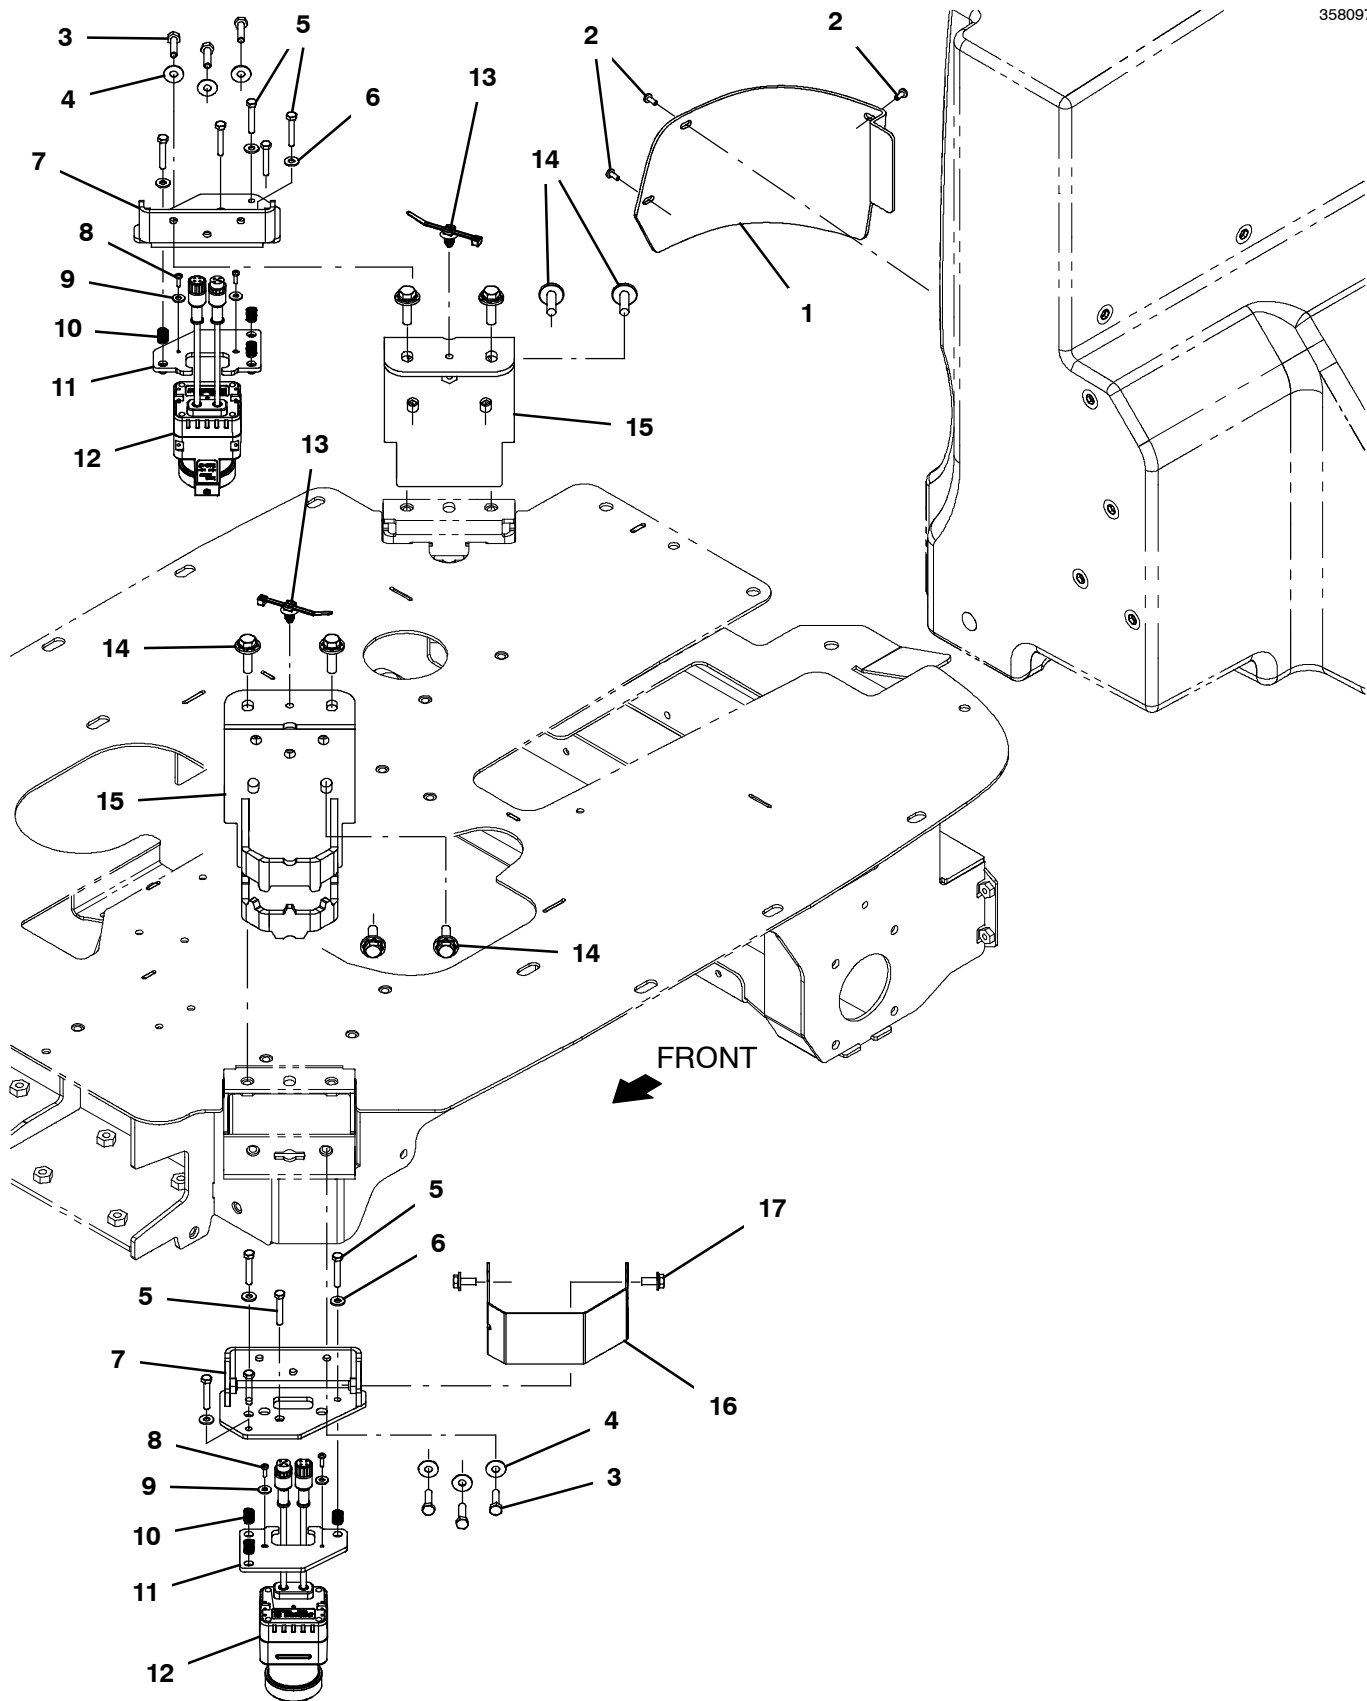


LOWER CAMERA SENSOR GROUP

Ref.	Part No.	Serial Number	Description	Qty.
1	1270087	()	Cover, Sensor, Rear	1
2	1069315	()	Screw, Pan, Phl, M4 X 0.70 X 10, Blk	3
3	1016005	()	Screw, Hex, M6 X 1.00 X 25, NI, Fl, Ss	6
4	01684	()	Washer, Flat, 0.27b 0.69d .05, Ss	6
5	1228033	()	Screw, Hex, M5 X 0.80 X 30, Ss	10
6	01683	()	Washer, Flat, 10, Ss	6
7	1271799	()	Bracket Wldt, Adj, Sensor	2
8	06920	()	Screw, Pan, Phl, M3 X 0.50 X 10, 4.8	4
9	19065	()	Washer, Flat, 0.19b 0.44d .05, Pl, 08	4
10	1240077	()	Spring, Cmpr, .36od, .04wir, 0.75l, Ss	6
11	1259172	()	Plate Assy, Adj	2
12	9023043*	()	Sensor, Range, Amr, Afmkt [Olei]	2
13	1210807	()	Wire, Tie [W/.25" Fir Tree Clip]	2
14	1072816	()	Screw, Hex, M8 X 1.25 X 30, Ss, Sems	8
15	9023264	()	Guard Kit, Sensor, Afmkt [Lidar W/Label]	2
16	1270951	()	Plate, Cover, Sensor	1
17	1034731	()	Screw, Hex, M6 X 1.00 X 16, Sems, Ss	2

* Requires Tennant *True* service or an authorized Tennant service provider.

PERIMETER GUARD GROUP

358098

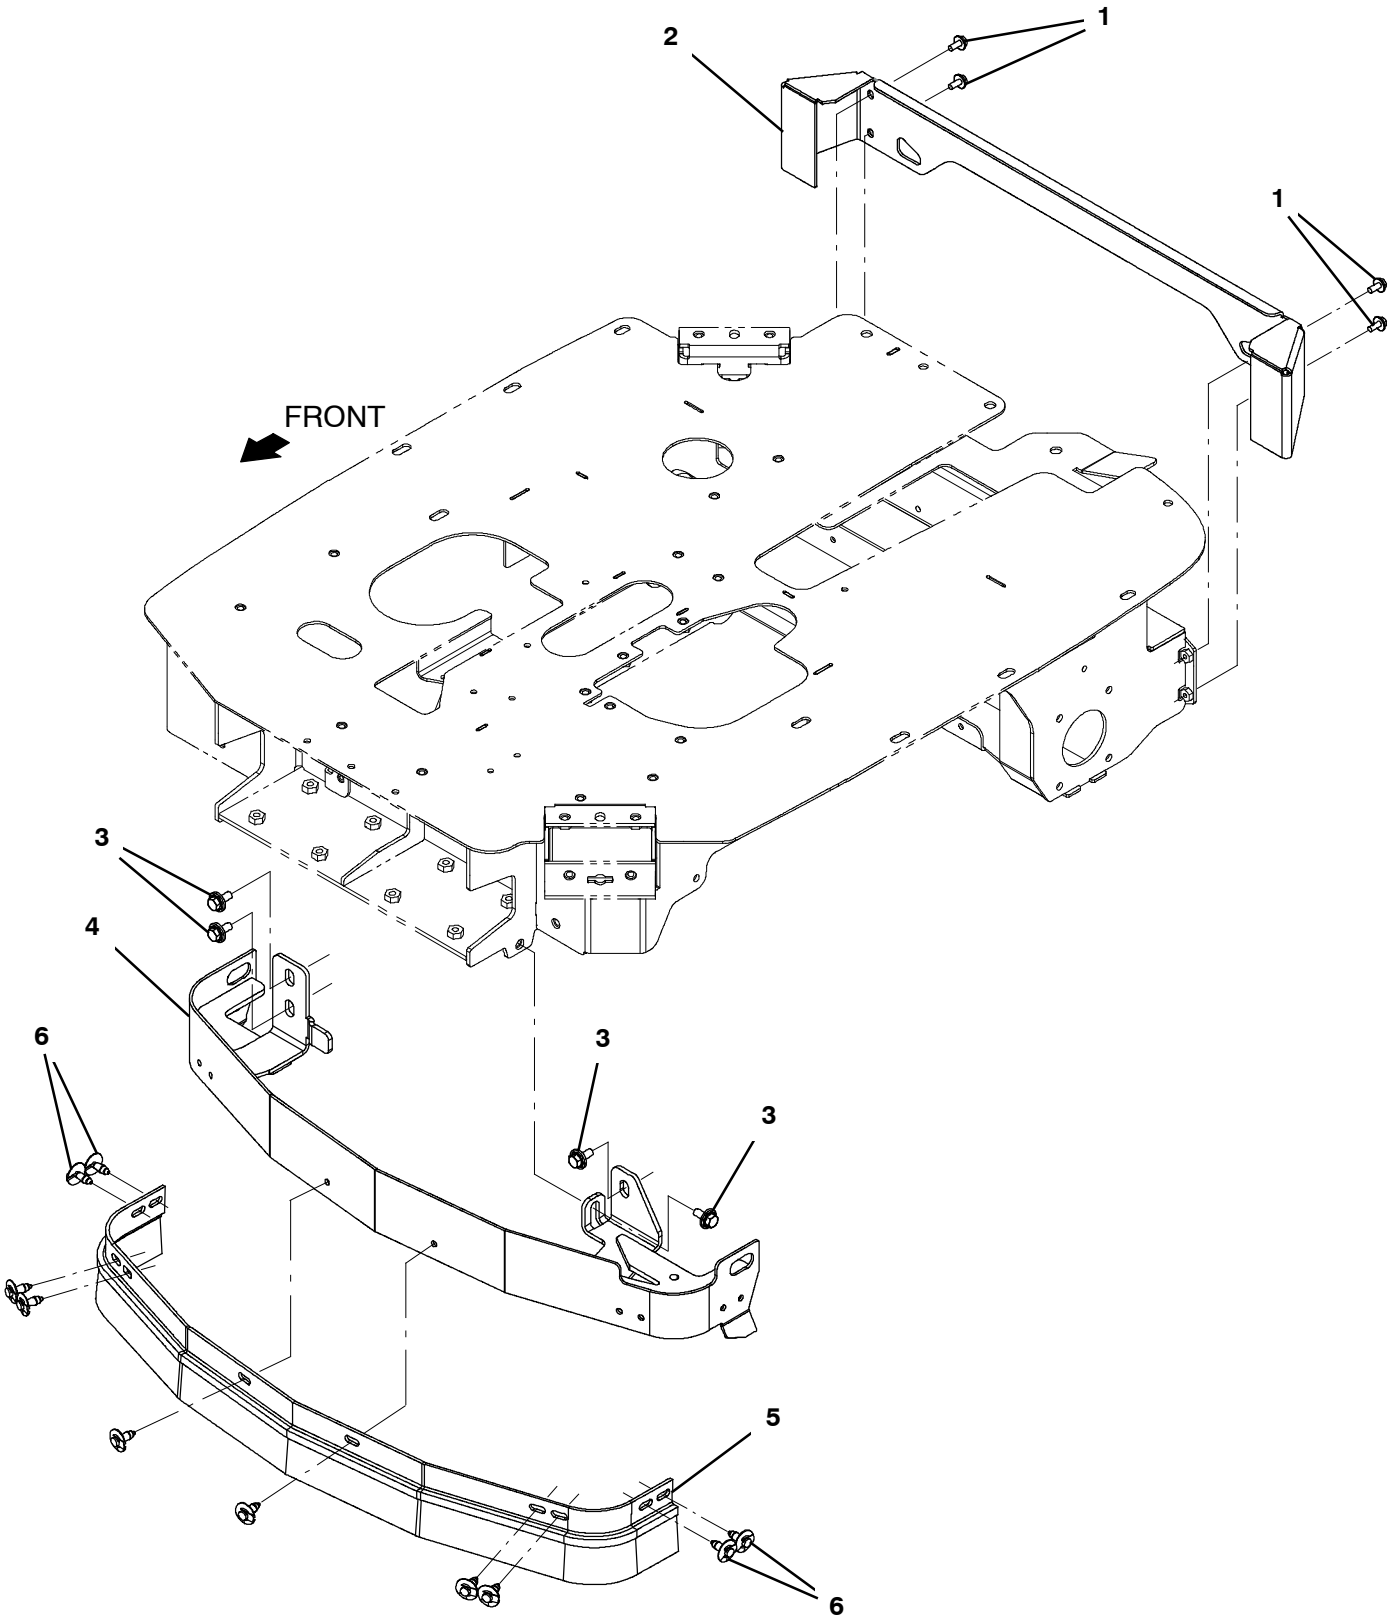

PERIMETER GUARD GROUP

Ref.	Part No.	Serial Number	Description	Qty.
1	1034731	()	Screw, Hex, M6 X 1.00 X 16, Sems, Ss	4
2	9023456	()	Guard Kit, Rear, Afmkt [Na, W/Labels] (NA / AUS)	1
2	9023469	()	Guard Kit, Rear, Afmkt [Ce, W/Labels] (EMEA)	1
3	1020341	()	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	4
4	1267904	()	Guard Wldt, Front	1
▽	9023470	()	Bristle Kit, Guard [X6 Rovr]	1
▲	5 4209001	()	Bumper, Bristles, Guard, Front	1
▲	6 72968	()	Rivet, Plstc, .250d X 0.90	10

NA = North America


EMEA = Europe, Middle East, and Africa

AUS = Australia

▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

HANDLE BAIL GROUP

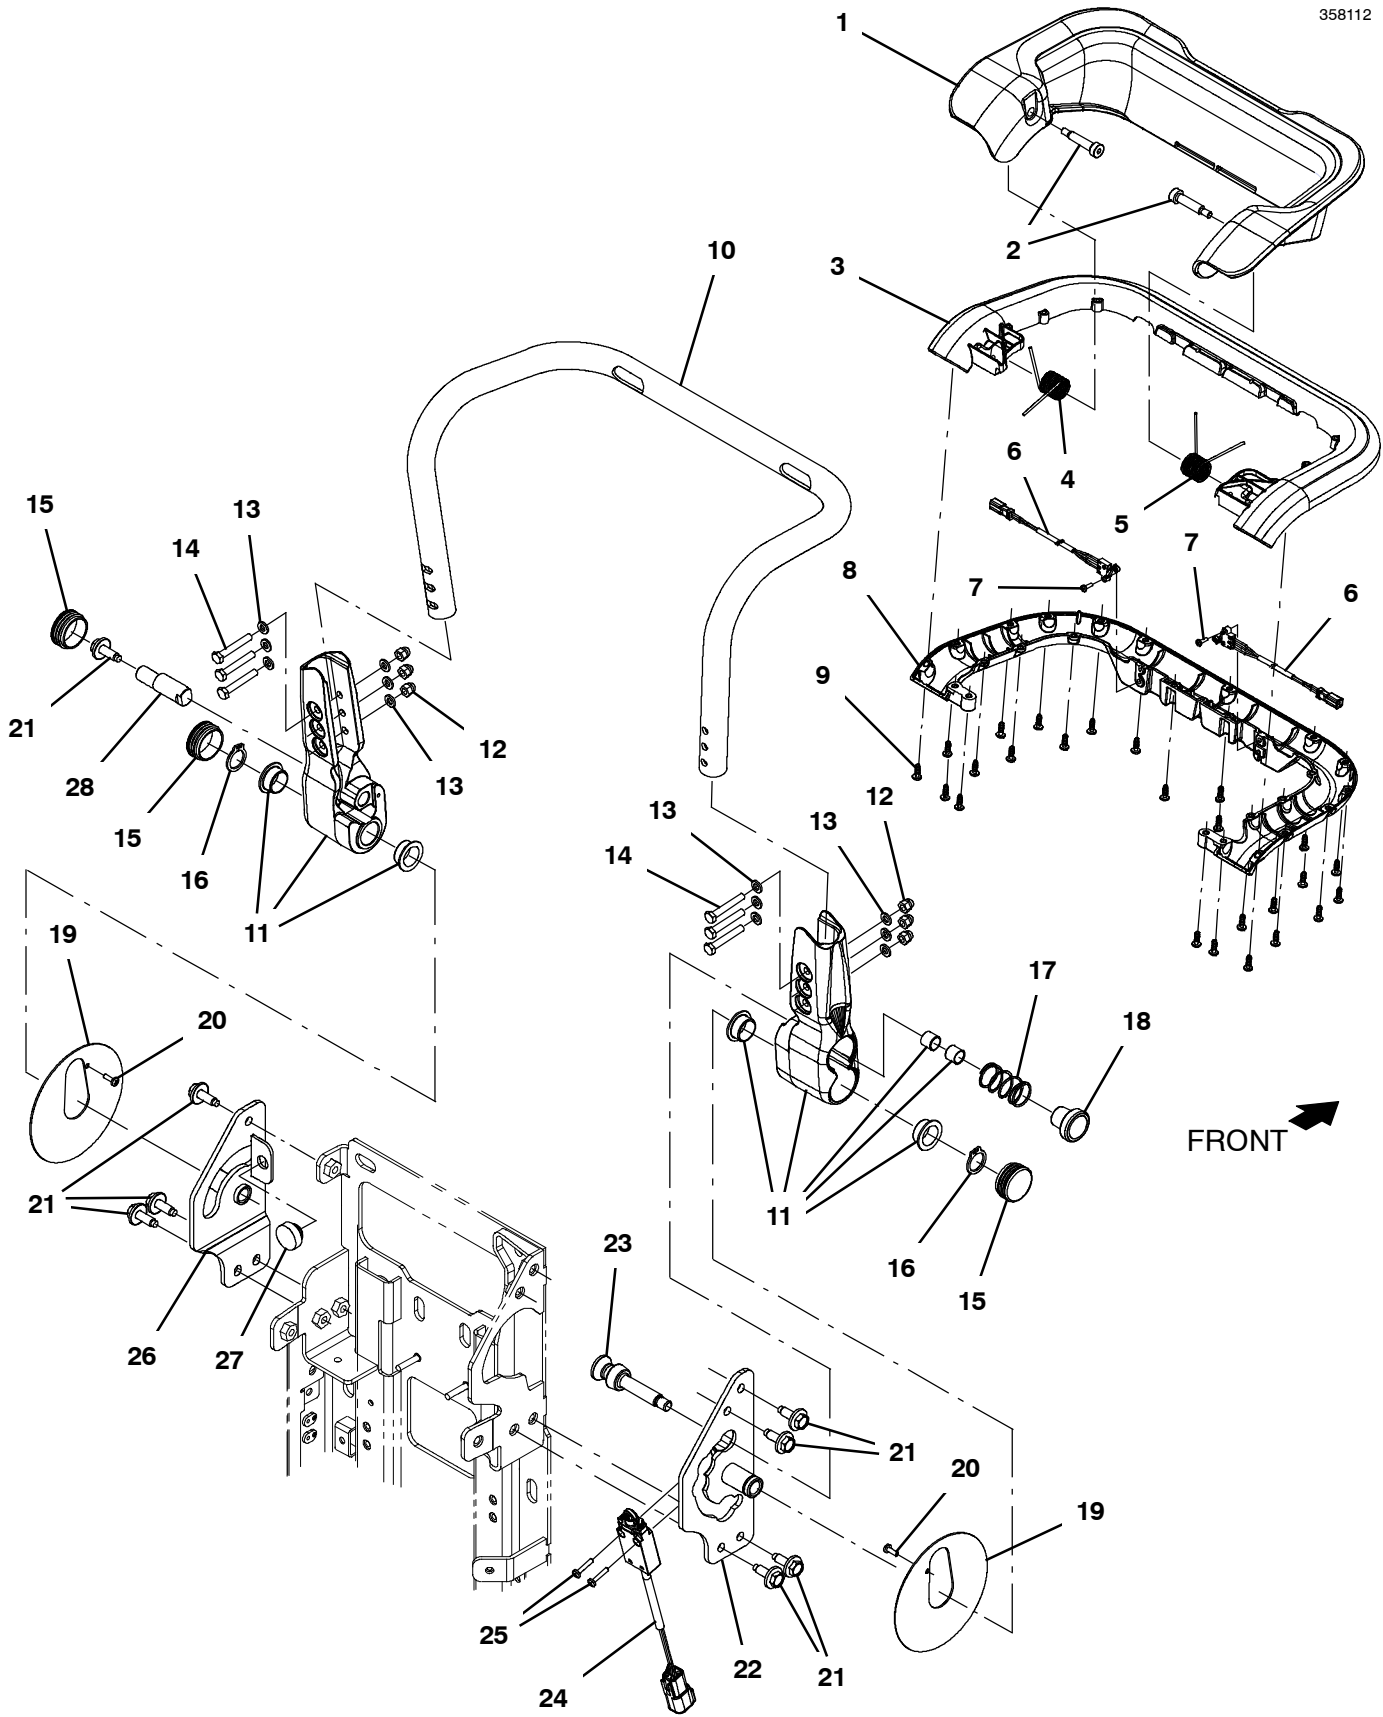


HANDLE BAIL GROUP

Ref.	Part No.	Serial Number	Description	Qty.
1	1260529	()	Handle, Bail	1
2	1024965	()	Bolt, Shld, 08mmd X 030mm, M06 X 1.0	2
3	1272228	()	Handle, Clamshell, Top	1
4	1262283	()	Spring, Tors, 0.68id .078wir 9.75coil Rh	1
5	1262284	()	Spring, Tors, 0.68id .078wir 9.75coil Lh	1
6	1260467	()	Switch, 0.5a, Spdt, Rlr, Sealed	2
7	06920	()	Screw, Pan, Phl, M3 X 0.50 X 10, 4.8	2
8	1272230	()	Handle, Clamshell, Bottom	1
9	49162	()	Screw, Pan, Phl, 08- 16 X 0.50, F/ Plstc	25
10	1260826	()	Tube, Handle, Bend	1
11	9023065	()	Lug Handle, Afkmt {X4 Rovr]	1
12	1265457	()	Nut, Dome, M6 X 1.00, Stl, Blk	6
13	1265458	()	Washer, Flat, 0.25b 0.47d .06, Stl, Blk	12
14	1265459	()	Screw, Hex, M6 X 1.00 X 40, 8.8, Blk	6
15	1260563	()	Plug, Hole, Rnd, 1.25h 0.50l, Blk Ldpe	3
16	1025121	()	Ring, Retaining, Shaft, Ext, 20mmd, Hd	2
17	1275679	()	Spring, Compr, 0.97od, 0.063wir 1.75l	1
18	1222988	()	Knob, Rnd, 31.0d 27.0l M10, Plstc	1
19	1260832	()	Plate, Pivot, Cover	2
20	1212542	()	Screw, Pan, Phl, M4 X 0.70 X 12, NI, Ss	2
21	1037346	()	Screw, Hex, M8 X 1.25 X 25, 9.8, Sems	8
22	1263890	()	Bracket, Pivot, Mount, Rh, Taper	1
23	1261123	()	Pin, Stop, Pivot, M10	1
24	1266879	()	Switch, Plunger, Roller, Sealed	1
25	12323	()	Screw, Pan, Phl, M4 X 0.70 X 20, Ss	2
26	1274691	()	Bracket Wldt, Lh, Pivot	1
27	71891	()	Bumper, Rbr, 1.0d 0.69th 0.50 Tip	1
28	9023474	()	Pin, Stop, Adj, Afmkt	1

CONTROL PANEL GROUP

358111

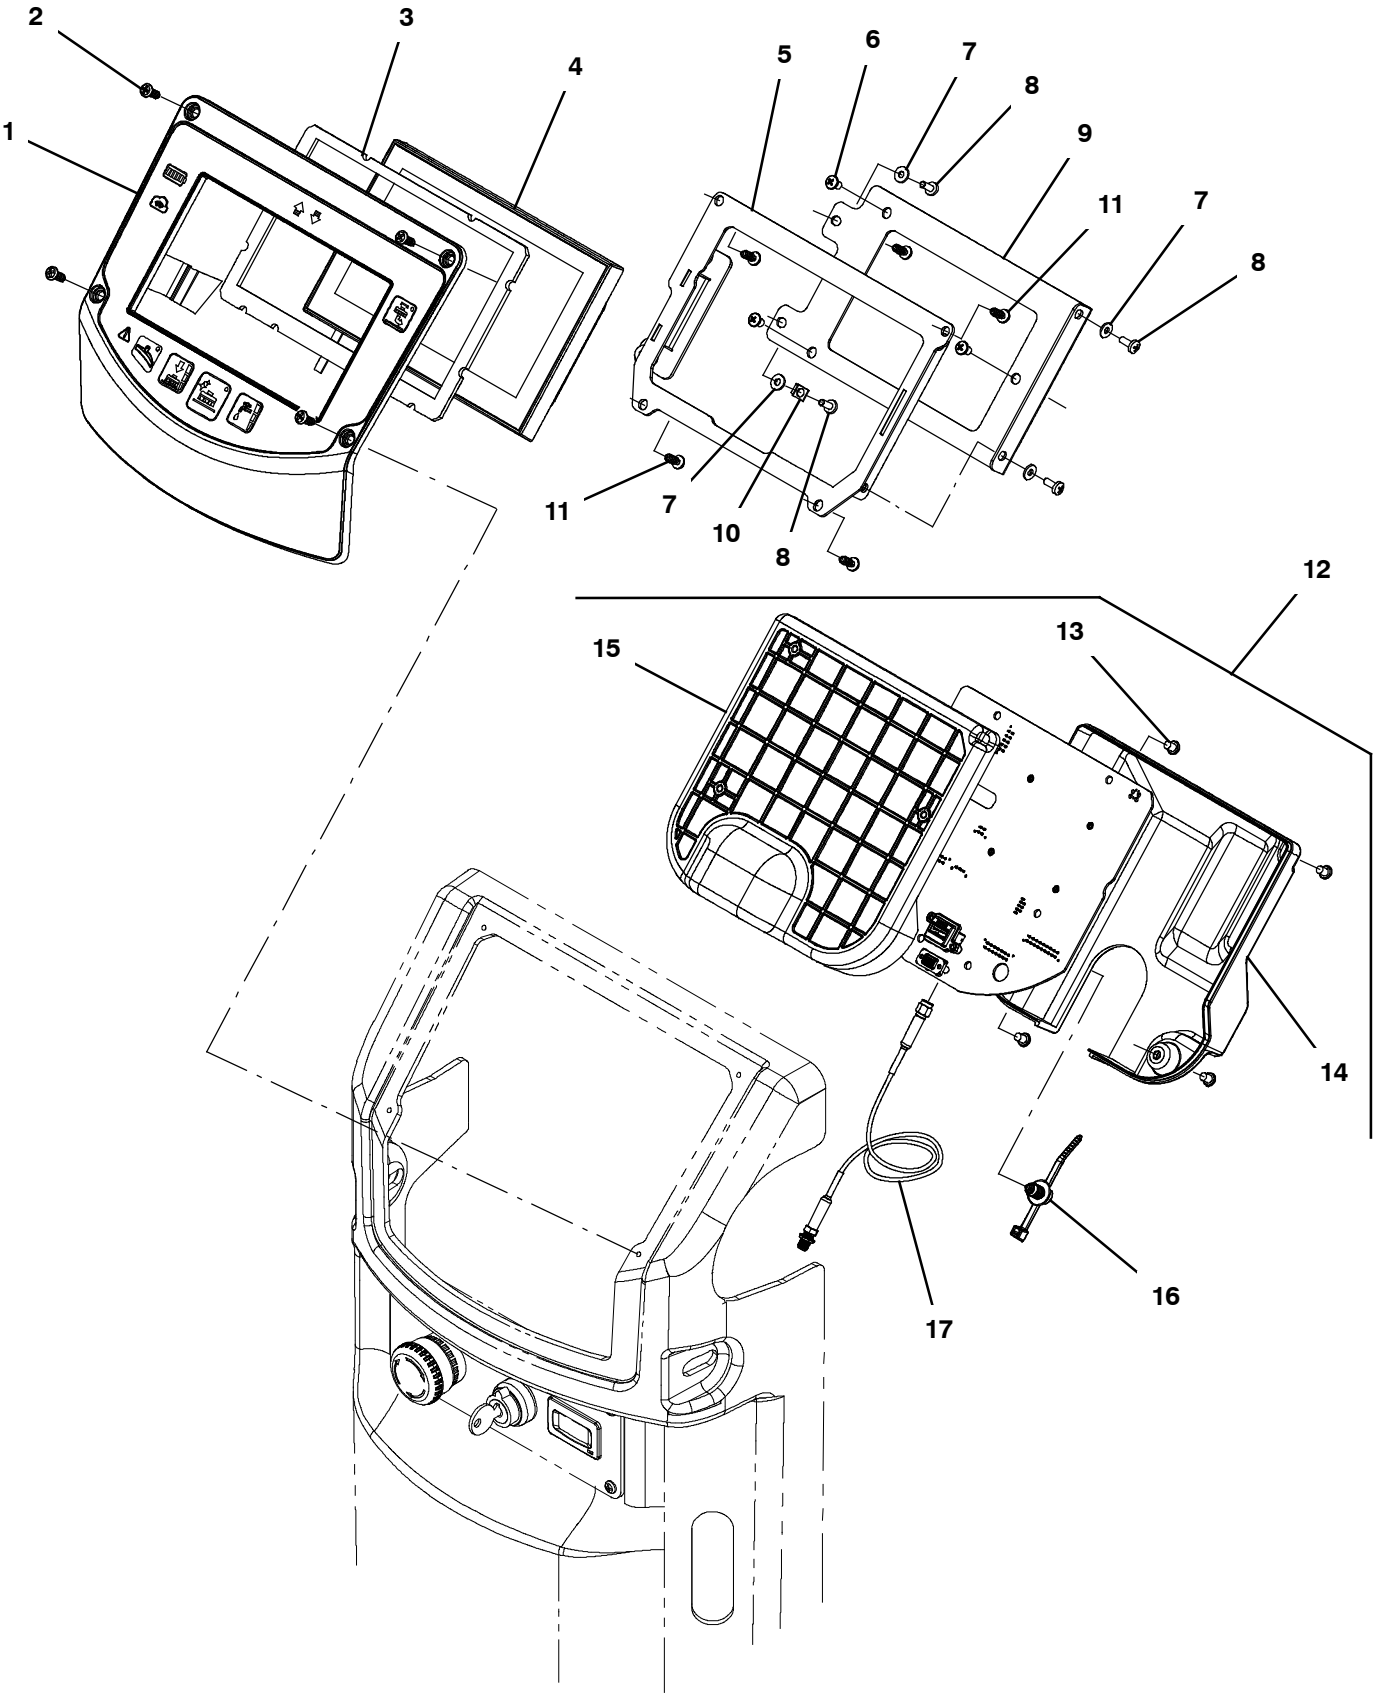

CONTROL PANEL GROUP

Ref.	Part No.	Serial Number	Description	Qty.	
1	9023380	()	Bezel, Membrane, Afmkt [X6]	1	
2	49162	()	Screw, Pan, Phl, 08- 16 X 0.50, F/ Plstc	4	
3	1262688	()	Gasket, Mtg, Lcd	1	
4	9023094	()	Touch Screen, Afmkt	1	
5	1262698	()	Bracket Wldt, Mtg, Lcd	1	
6	1203025	()	Screw, Pan, Phl, 08- 16 X 0.25, F/ Plstc	3	
7	19064	()	Washer, Flat, 0.16b 0.38d .05, Pl, 06	4	
8	49697	()	Screw, Pan, Phl, M4 X 0.70 X 10, Ss	4	
9	1260956	()	Bracket, Mtg, Enclosure	1	
10	1252199	()	Terminal, Spade [Faston]	2	
11	49162	()	Screw, Pan, Phl, 08- 16 X 0.50, F/ Plstc	4	
▽	12	9023061*	()	Ui Assembly, Afkmt [Telemetry]	1
▲	13	1203025	()	Screw, Pan, Phl, 08- 16 X 0.25, F/ Plstc	4
▲	14	1261508	()	Cover, Enclosure, Pcb	1
▲	15	1261507	()	Base, Enclosure, Pcb	1
16	1210807	()	Wire, Tie [W/.25" Fir Tree Clip]	1	
17	9023076	()	Antenna Cable Ext, Afmkt [Telemetry]	1	


* Requires Tennant *True* service or an authorized Tennant service provider.

▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

REAR CONSOLE PANEL GROUP

358110

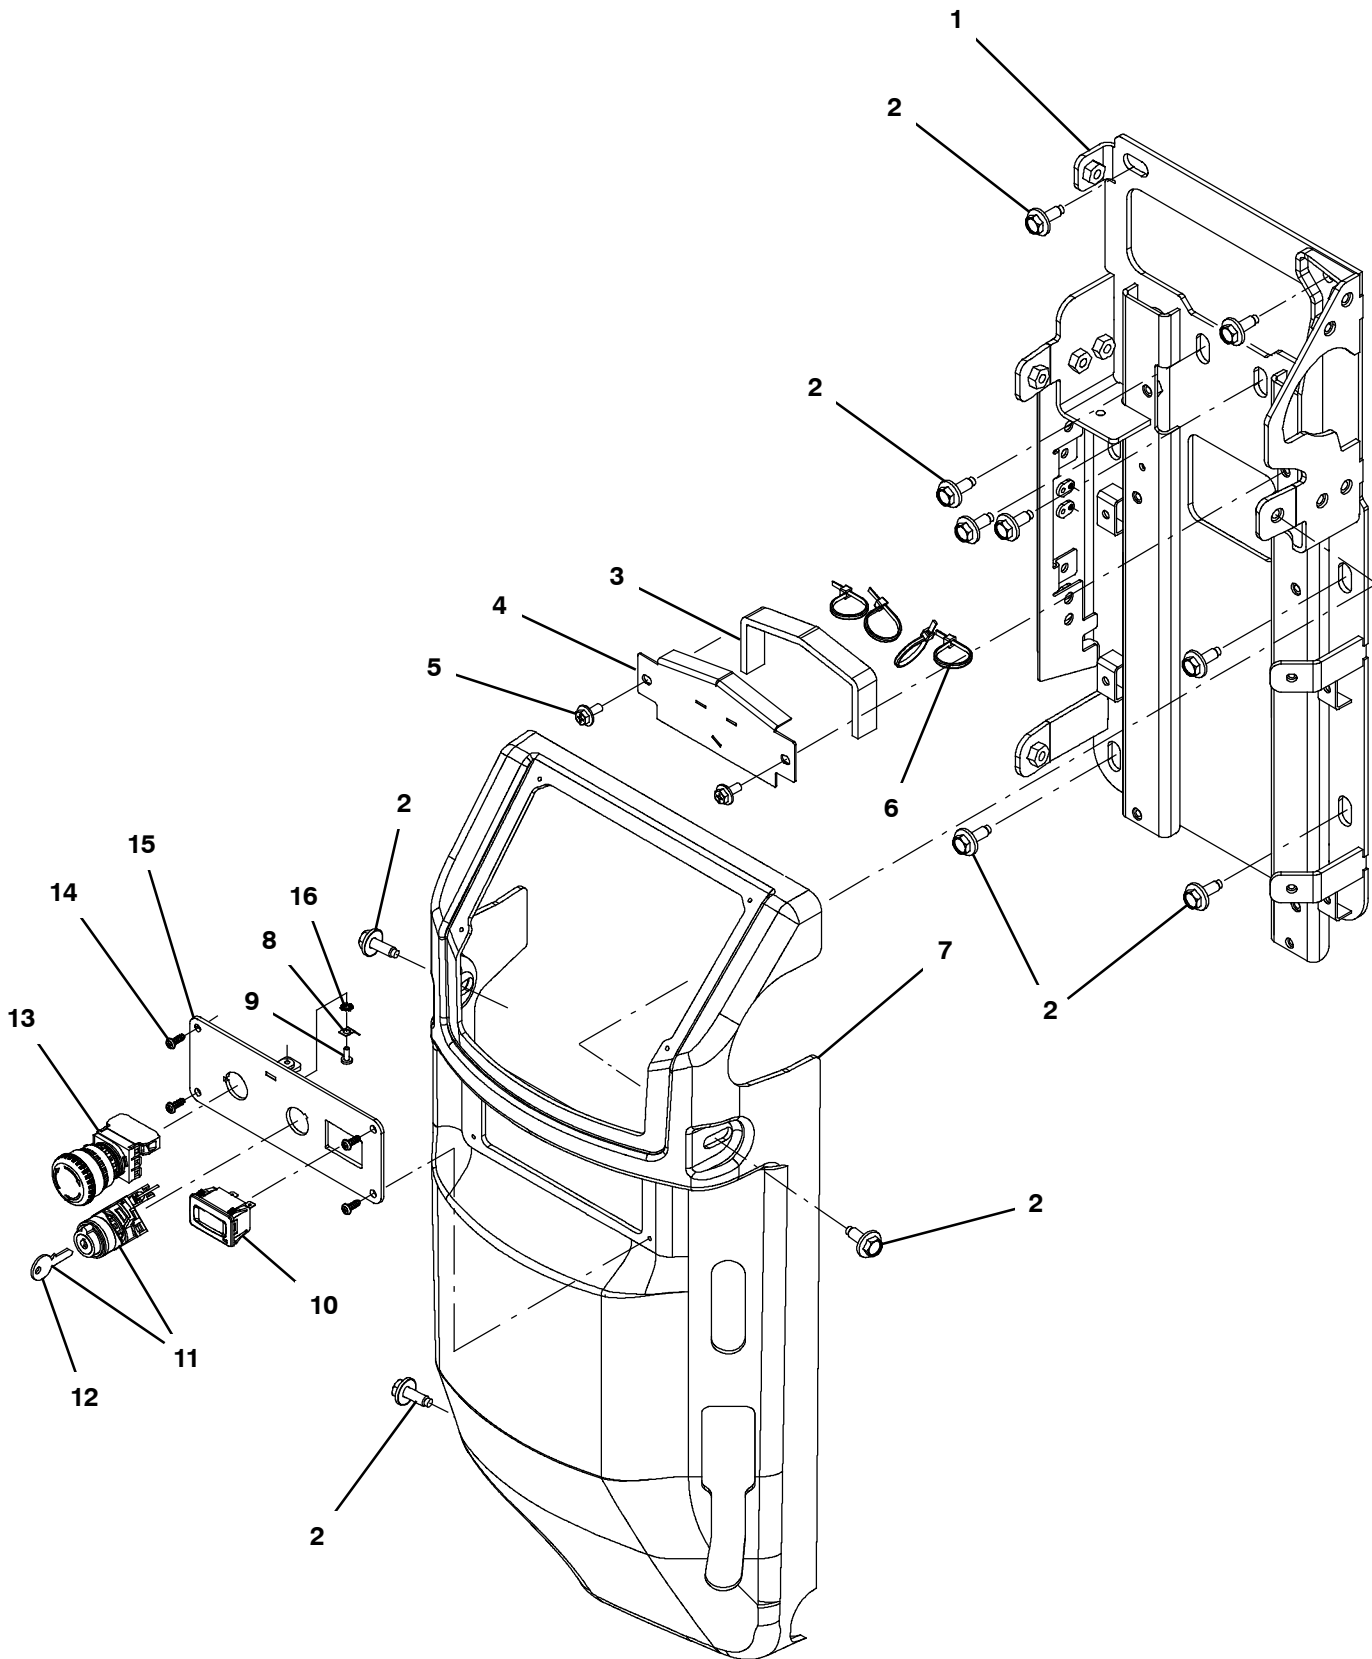

REAR CONSOLE PANEL GROUP


Ref.	Part No.	Serial Number	Description	Qty.	
1	1259754	()	Frame Wldt, Console	1	
2	1037346	()	Screw, Hex, M8 X 1.25 X 25, 9.8, Sems	11	
3	1264965	()	Gasket, Enclosure	1	
4	1264961	()	Enclosure Wldt, Wire	1	
5	1034731	()	Screw, Hex, M6 X 1.00 X 16, Sems, Ss	2	
6	130773	()	Tie, Cable, Nyl, 11.0l, .14w, 3.0 Max. D	4	
7	1276169	()	Shroud, Console, Rear	1	
8	1252199	()	Terminal, Spade [Faston]	1	
9	49697	()	Screw, Pan, Phl, M4 X 0.70 X 10, Ss	1	
10	1064038	()	Gauge, Hourmeter, 05- 277 Volt, Ac / Dc	1	
▽	11	1240354	()	Switch, Key (Includes Qty 2 Keys)	1
▲	12	1240918	()	Key, Switch	1
	13	1242161	()	Switch, Safety, Shutoff	1
	14	49162	()	Screw, Pan, Phl, 08- 16 X 0.50, F/ Plstc	4
	15	9023070	()	Switch Plate, Afkmt	1
	16	140061	()	Washer, Lock, Ext, 08, Pl	1

▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

ELECTRICAL BOX GROUP

358103

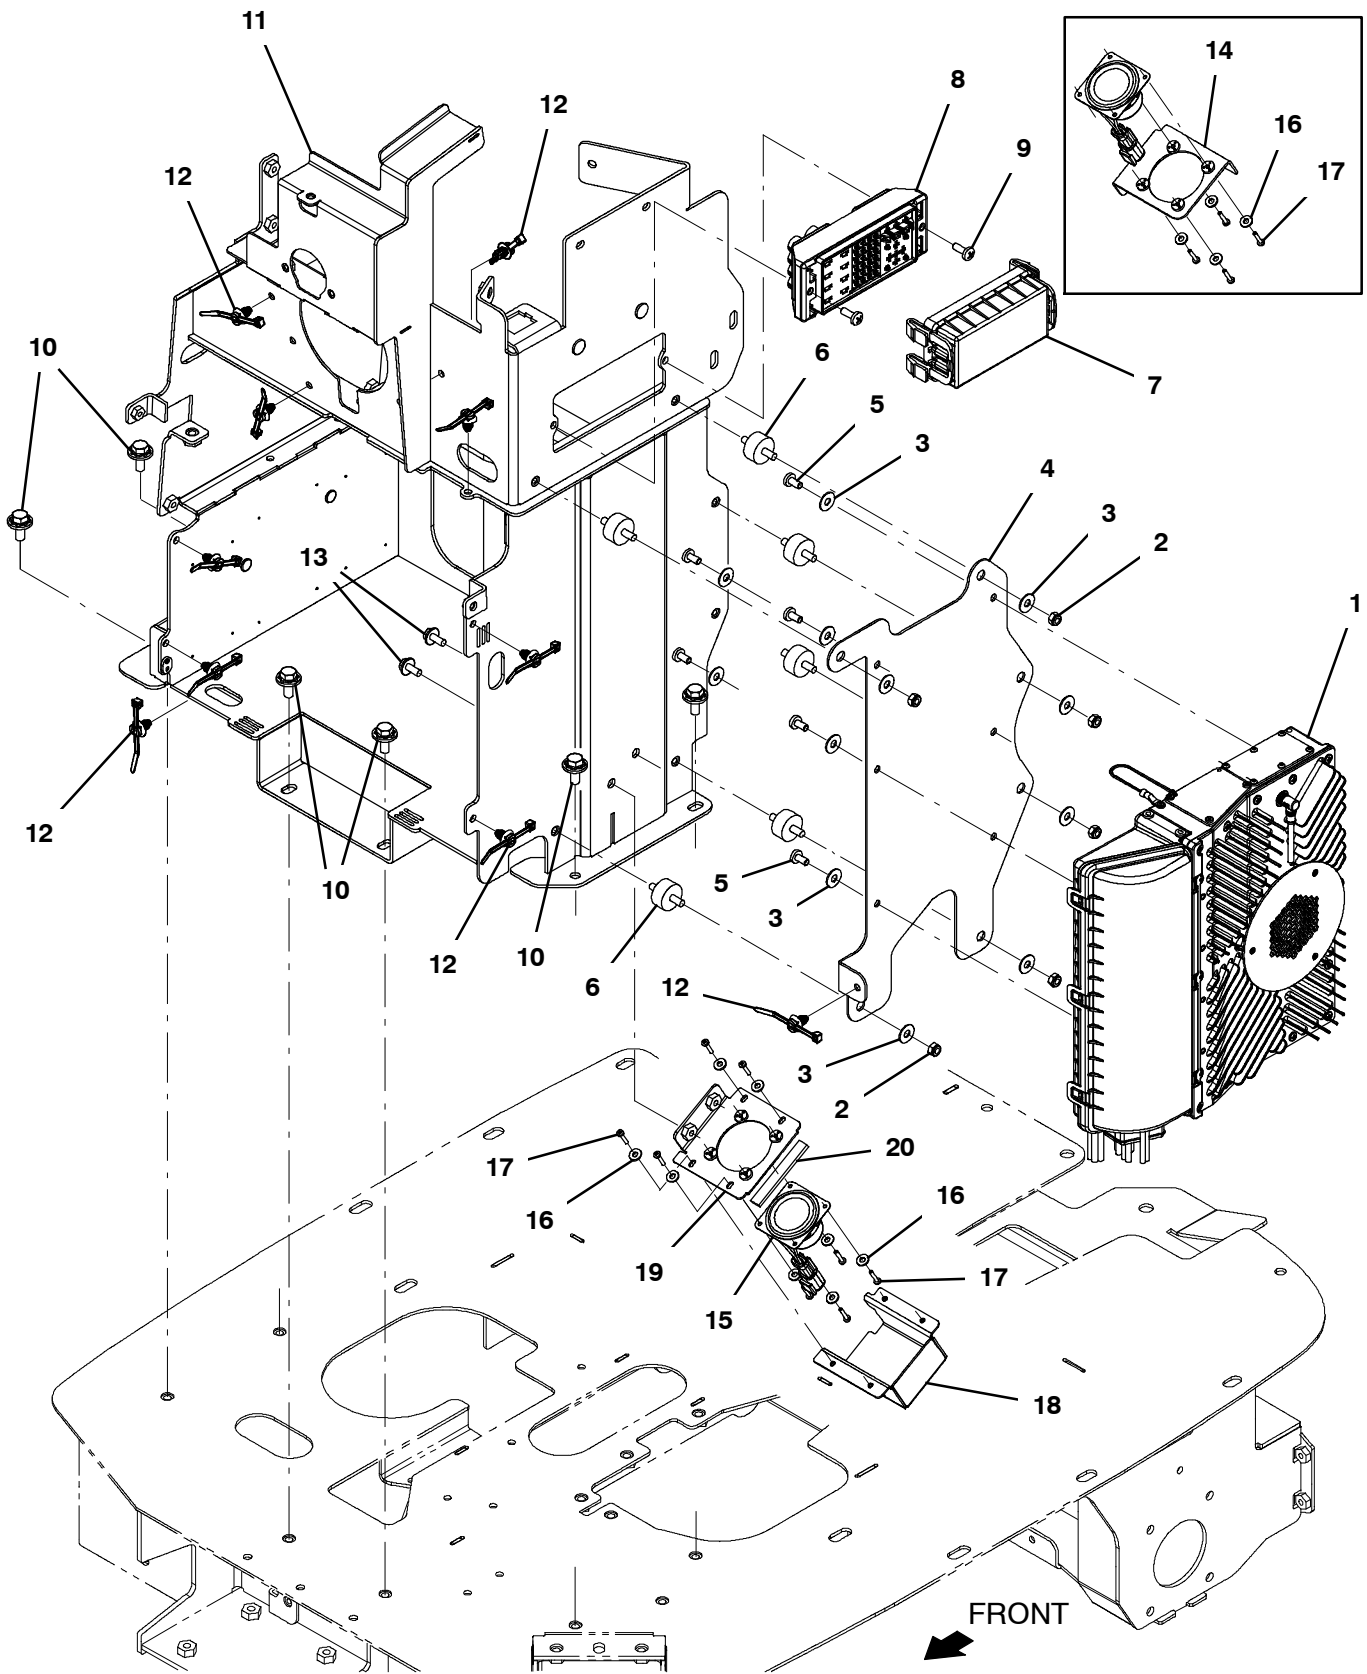

ELECTRICAL BOX GROUP

Ref.	Part No.	Serial Number	Description	Qty.	
1	9023058*	()	B3cm Kit, Afmkt	1	
2	08712	()	Nut, Hex, Lock, M6 X 1.00, NI, Ss	6	
3	01684	()	Washer, Flat, 0.27b 0.69d .05, Ss	12	
4	1267846	()	Bracket, Mtg, Controller [Fpcm]	1	
5	74027	()	Screw, Pan, Phl, M6 X 1.00 X 12, NI, PI	6	
6	1240009	()	Isolator, Vib, 1.0d 0.5l M6/M6	6	
▽	7	9023373	()	Fuse Block Cover, Afmkt [W/Label, X6]	1
▲▽	8	N/A	()	Module, Fuse Block Holder (Included on Main Harness)	1
▲▲		1269169	()	Fuse, Blade, 003a, 32vdc [Mini]	3
▲▲		1269172	()	Fuse, Blade, 015a, 32vdc [Mini]	1
▲▲		1269499	()	Fuse, Blade, 020a, 32vdc [Maxi]	2
▲▲		1269173	()	Fuse, Blade, 050a, 32vdc [Maxi] (Non Docking Models)	1
▲▲		1269173	()	Fuse, Blade, 050a, 32vdc [Maxi] (Docking Models)	2
▲▲		49309	()	Relay, 24vdc, 015a, Spdt No	1
9	09145	()	Screw, Pan, Phl, M6 X 1.00 X 16, 4.8	2	
10	1020341	()	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	6	
11	9023473	()	Electrical Cabinet Kit, Aftmr [Label]	1	
12	1210807	()	Wire, Tie [W/.25" Fir Tree Clip]	10	
13	1034731	()	Screw, Hex, M6 X 1.00 X 16, Sems, Ss	2	
14	1265010	(10000000- xxxxxxxx)	Bracket Wldt, Mount, Speaker	1	
▽		4239228	(xxxxxxx-)	Enclosure Kit, Speaker	1
▲	15	1259795	()	Speaker, 8ohm, 10w, 3.1 Od	1
▲	16	4016852	(xxxxxxx-)	Washer, Flat, 08, Ss	8
	16	41579	(10000000- xxxxxxxx)	Washer, Flat, 08, Ss	4
▲	17	4042576	(xxxxxxx-)	Screw, Pan, Phl, M3 X 0.50 X 16, PI	8
	17	200070266	(10000000- xxxxxxxx)	Screw, Pan, Phl, M3 X 0.50 X 16, PI	4
▲	18	4239197	(xxxxxxx-)	Box Wldt, Enclosure, Lower	1
▲	19	4239195	(xxxxxxx-)	Bracket Wldt, Enclosure Upper	1
▲	20	4207221	(xxxxxxx-)	Seal, Ctl, Matl C410217, 70mm L	1


* Requires Tennant *True* service or an authorized Tennant service provider.

▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

ELECTRICAL GROUP

358104

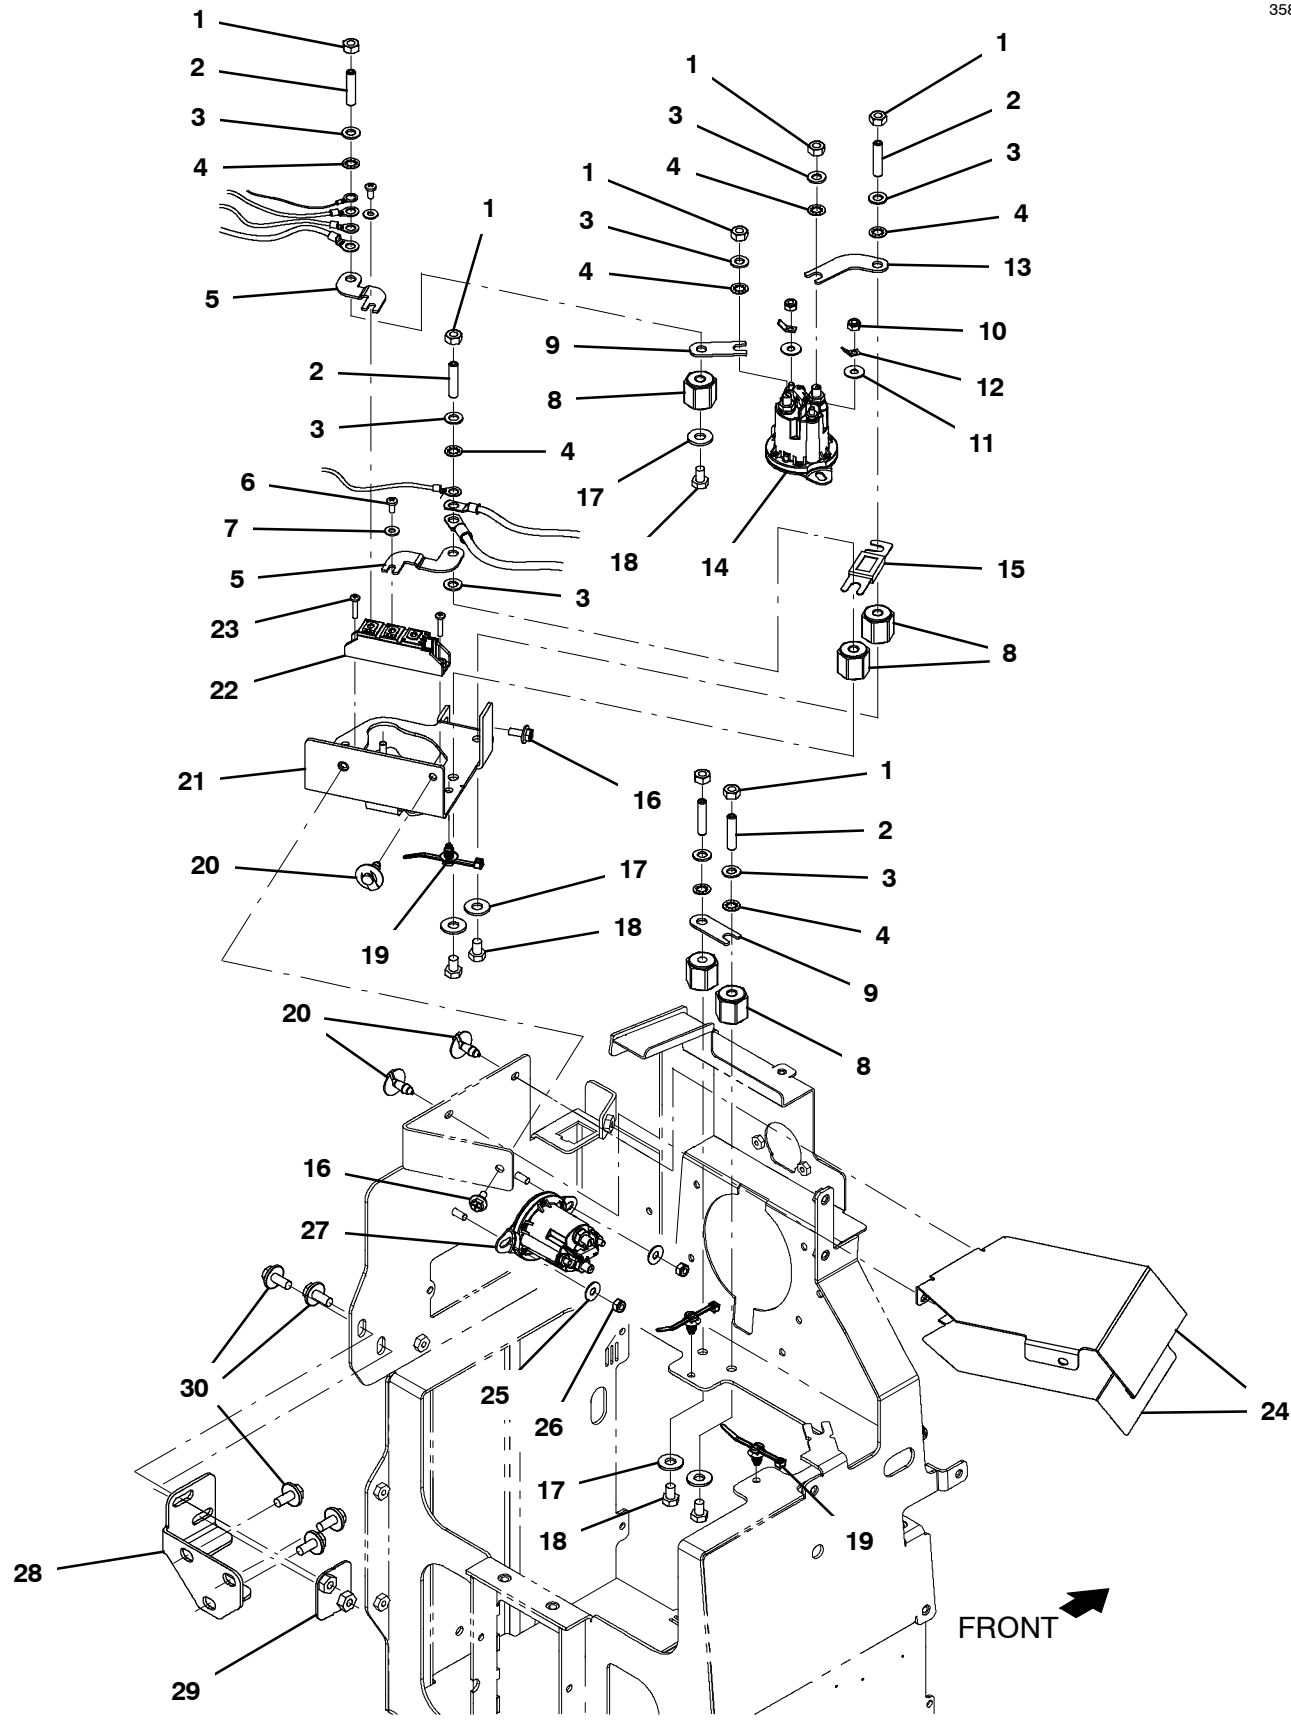


ELECTRICAL GROUP

Ref.	Part No.	Serial Number	Description	Qty.
1	41361	()	Nut, Hex, Std, M8 X 1.25, Brs	7
2	607461	()	Screw, Set, M8 X 1.25 X 35, NI	5
3	1209373	()	Washer, Flat, M8.4b X 16d X 1.6, Brs	8
4	43952	()	Washer, Lock, Int, 0.31, Ss	7
5	1264660	()	Busbar, .08t 2.0w 0.2h 2.0l	2
6	1026454	()	Screw, Pan, Phl, M5 X 0.80 X 10, Ss	2
7	01683	()	Washer, Flat, 10, Ss	2
8	1205345	()	Stand- Off, Wir, M8, Insulator, Panel	5
9	1261665	()	Busbar, .08t .75w .08h 2.0l	2
10	01689	()	Nut, Hex, Std, #10- 32, Ss	2
11	01683	()	Washer, Flat, 10, Ss	2
12	1252199	()	Terminal, Spade [Faston]	2
13	1263364	()	Busbar, .08t 2.6w .08h 2.1l	1
14	1261653	()	Relay, 24vdc, 200a, No [Silver, Tvs]	1
15	86379	()	Fuse, 100a, 0.88 2.4l, 125volt	1
16	1034731	()	Screw, Hex, M6 X 1.00 X 16, Sems, Ss	2
17	01685	()	Washer, Flat, 0.38b 0.88d .08, Ss	5
18	50388	()	Screw, Hex, M8 X 1.25 X 12, 8.8	5
19	1210807	()	Wire, Tie [W/.25" Fir Tree Clip]	3
20	72968	()	Rivet, Plstc, .250d X 0.90	3
21	1263620	()	Bracket Wldt, Mtg, Contactor	1
22	1260809	()	Diode, Dual [Series, To- 240aa]	1
23	12323	()	Screw, Pan, Phl, M4 X 0.70 X 20, Ss	2
24	9023054	()	Contactor Cover, Afmkt [W/Protection]	1
25	01684	()	Washer, Flat, 0.27b 0.69d .05, Ss (Dock Models Only)	2
26	08712	()	Nut, Hex, Lock, M6 X 1.00, NI, Ss (Dock Models Only)	2
27	1261653	()	Relay, 24vdc, 200a, No [Silver, Tvs] (Dock Models Only)	1
28	1267892	()	Bracket, Sppt, Tank, Upper	1
29	1266929	()	Plate Wldt, Nut	1
30	1020341	()	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	5

ELECTRICAL CONTROLLER GROUP

358105

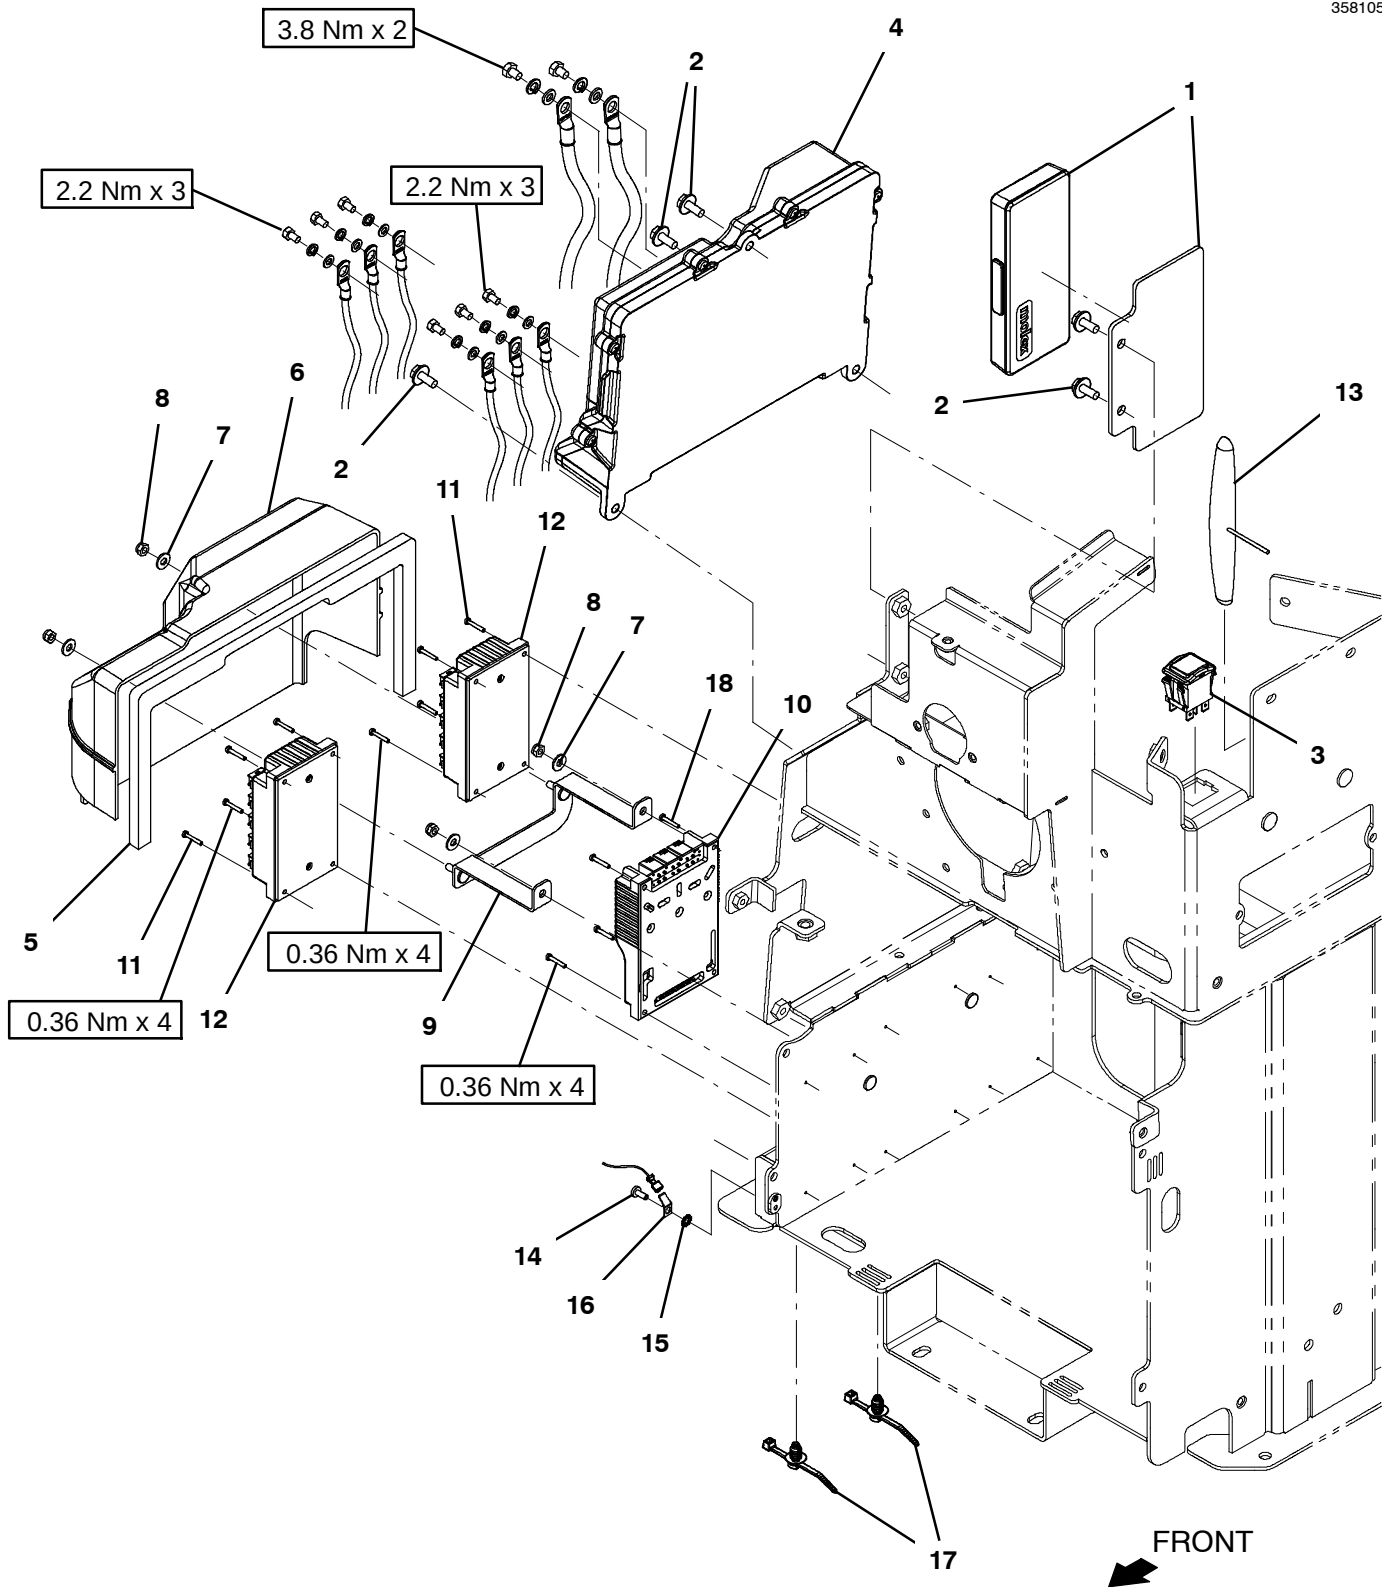


ELECTRICAL CONTROLLER GROUP

Ref.	Part No.	Serial Number	Description	Qty.
1	9023057	()	Brain Antenna Kit, Afmkt	1
2	1034731	()	Screw, Hex, M6 X 1.00 X 16, Sems, Ss	5
3	363607	()	Switch, Rocker, Dpdt, On / None / On	1
4	9023123*	()	Controller Kit, Scrub [X4 Rovr]	1
5	1267107	()	Gasket, Cover	1
6	1266935	()	Cover, Ele, Propel	1
7	01683	()	Washer, Flat, 10, Ss	4
8	06549	()	Nut, Hex, M5 X 0.80 X 16, 8.8	4
9	1267105	()	Bracket Wldt, Mtg, Cover	1
10	9023172*	(11132289-	Controller, Propel, Afmkt	1
10	4045912*	(10000000- 11132288	Controller, Propel, Afmkt, W/ M2.5x12	1
11	1272624	(11132289-	Screw, Pan, Phl, M2.5 X 0.45 X 16, Pl	8
11	1272624	(10000000- 11132288	Screw, Pan, Phl, M2.5 X 0.45 X 16, Pl	12
12	9023173*	()	Controller, Propel, Safety, Afmkt	2
13	9023056	()	Antenna, Afmkt [Tnc Telemetry]	1
14	49697	()	Screw, Pan, Phl, M4 X 0.70 X 10, Ss	1
15	140061	()	Washer, Lock, Ext, 08, Pl	1
16	1252199	()	Terminal, Spade [Faston]	1
17	1210807	()	Wire, Tie [W/.25" Fir Tree Clip]	2
18	4008570	(11132289-	Screw, Pan, Phl, M2.5 X 0.45 X 12, Pl	4

* Requires Tennant *True* service or an authorized Tennant service provider.

REAR SQUEEGEE GROUP

358106

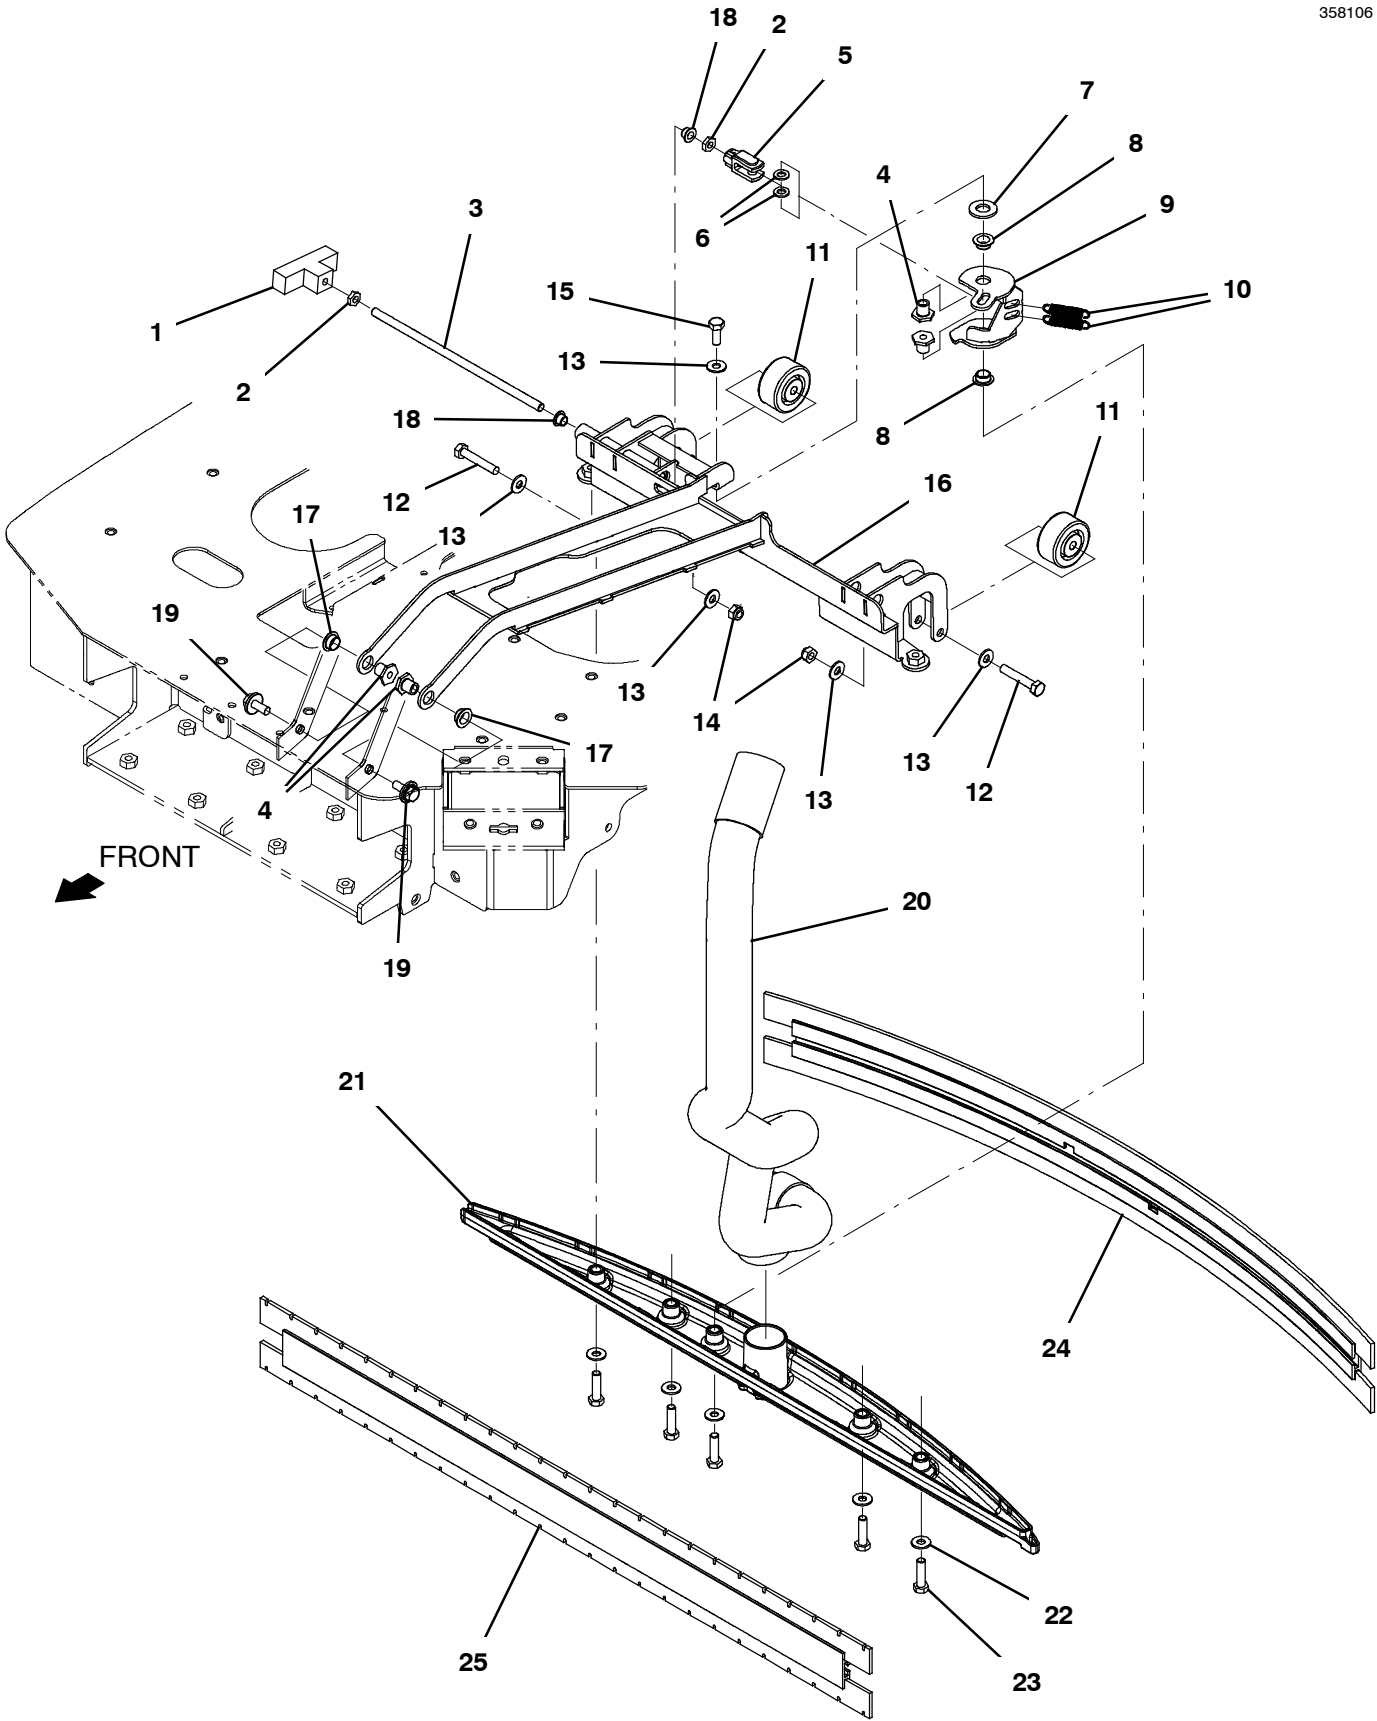

REAR SQUEEGEE GROUP


Ref.	Part No.	Serial Number	Description	Qty.
1	1254016	()	Handle, T, M8 X 1.25, Pull, Yel	1
2	200101017	()	Nut, Hex, Jam, M8 X 1.25	2
3	1274440	()	Rod, Thrd, 2 End, M08 X 1.25 9.0l	1
4	1266672	()	Nut, T, M8 12mmd 12mml	4
5	1253951	()	Clevis Assy, M8x1.25, W/ M8pin	1
6	1267696	()	Washer, Thrust, 8mmb 15mmd 1.5thk	2
7	32486	()	Washer, Flat, 0.53b 1.06d .10, Stl, Pl	3
8	1225660	()	Bushing, Flng, 12.0b 7.0l 14.0d, Plstc	2
9	1266806	()	Trunnion Wldt, Sqge, Pull	1
10	1233820	()	Spring, Extn, 0.375od .052wir 1.75l	2
11	1231753	()	Wheel, Urethane, 0.323b 2.0d 1.0w	2
12	222505	()	Screw, Hex, M8 X 1.25 X 45, Ss	2
13	32490	()	Washer, Flat, 0.25, Std	5
14	08713	()	Nut, Hex, Lock, M8 X 1.25, NI, Ss	2
15	12273	()	Screw, Hex, M8 X 1.25 X 20, NI, Ss	1
▽	16	9023451	() Sqge Arm Kit, Afrmkt [X6 W/ Bushings]	1
▲	17	1225660	() Bushing, Flng, 12.0b 7.0l 14.0d, Plstc	2
▲	18	1251107	() Bushing, Flng, 8mmb 10mmd 7.5mml	2
	19	1020341	() Screw, Hex, M8 X 1.25 X 20, Ss, Sems	2
	20	1270304	() Hose Assy, Sqge, Rear, 1.50 Dia 41.32"	1
	21	1270525	() Frame, Sqge [X6, As- Mach]	1
	22	32490	() Washer, Flat, 0.25, Std	5
	23	1016399	() Screw, Hex, M8 X 1.25 X 30, NI, Ss	5
▽		9023399	() Rear Sqge Blades, Primo [X6 Rovr] (Standard)	1
▲	24	1270218	() Blade Assy, Sqge, Rear [Primo] (Standard)	1
▲	25	1270216	() Blade Assy, Sqge, Front [Primo] (Standard)	1
▽		9023323	() Blades, Sqge, Rear, Linatex [X6 Rovr] (Option)	1
▲	24	1270211	() Blade Assy, Sqge, Rear, [Linatex] (Option)	1
▲	25	1270210	() Blade Assy, Sqge, Front, Linatex [28in] (Option)	1
▽		9023322	() Blades, Sqge, Rear, Ure [X6 Rovr] (Option)	1
▲	24	1263849	() Blade Assy, Sqge, Front, Ure [28in] (Option)	1
▲	25	1263846	() Blade Assy, Sqge, Rear, Ure [28in] (Option)	1

▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

SIDE SQUEEGEE GROUP, RIGHT

358107

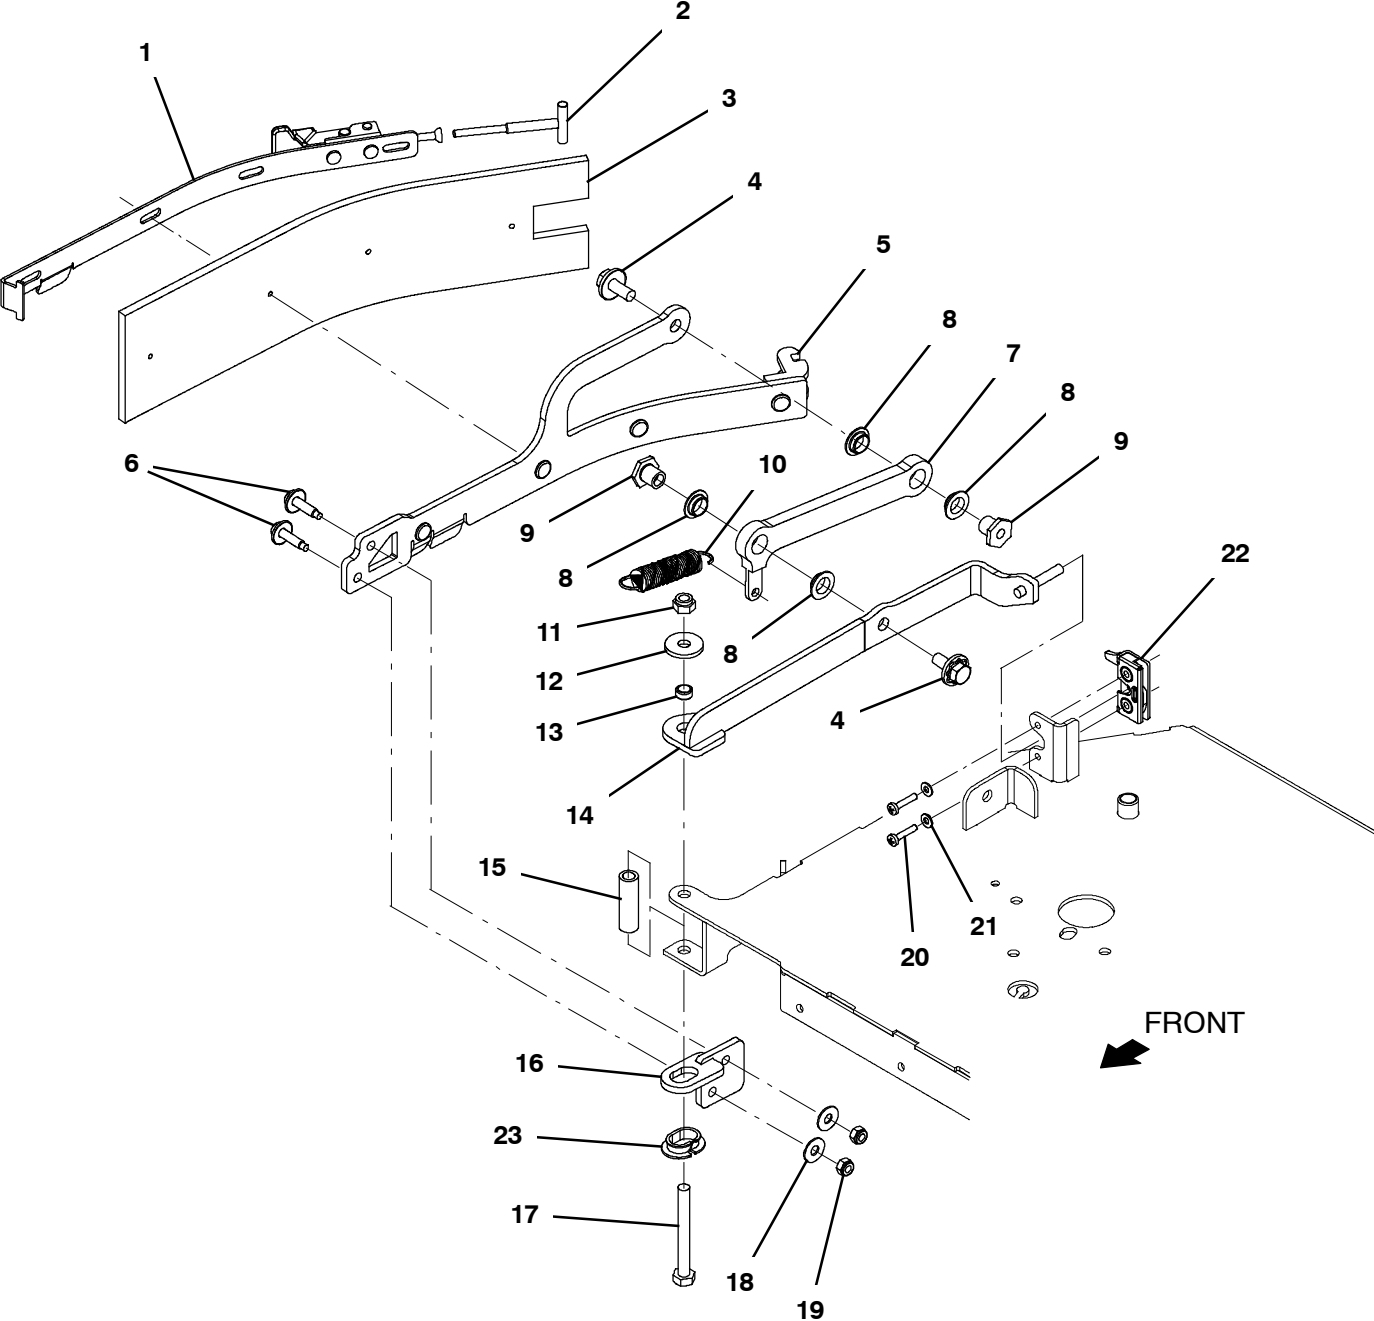

SIDE SQUEEGEE GROUP, RIGHT


Ref.	Part No.	Serial Number	Description	Qty.
1	1271412	()	Strap Assy, Sqge, Rh	1
2	1269128	()	Hook Wldt, Latch	1
▽	3	9023400	() Side Sqge Blades, Primo [X6 Rovr] (Standard)	1
▲	1271415	()	Blade, Sqge, Side [Primo] (Standard)	2
▽	3	9023324	() Blades, Sqge, Side, Linatex [X6 Rovr] (Option)	1
▲	1272100	()	Blade, Sqge, Side [Linatex] (Option)	2
4	1020341	()	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	2
5	1271409	()	Bracket Wldt, Mtg, Sqge, Rh	1
6	1036892	()	Screw, Hex, M6 X 1.00 X 25, 9.8, Sems	2
▽	7	9023452	() Link Kit, Afmkt [X6 W/ Bushings]	1
▲	8	1270972	() Bushing, Fling, 12.0b 5.0l 14.0d, Plstc	4
9	1266672	()	Nut, T, M8 12mmd 12mml	2
10	1014131	()	Spring, Extn, 0.620d 0.06wir 0.3.0l, Pl	1
11	08713	()	Nut, Hex, Lock, M8 X 1.25, NI, Ss	1
12	1017218	()	Washer, Flat, 0.32b 1.00d .12, Ss	1
13	1066720	()	Sleeve, P/M, 0.32b 0.44d 0.2l [430ss]	1
14	1271409	()	Bracket Wldt, Mtg, Sqge, Rh	1
15	1272295	()	Sleeve, 0.33b X 0.50d X 1.63l	1
16	1274613	()	Bracket Wldt, Sqge, Corner, Rh	1
17	09737	()	Screw, Pan, Phl, M8 X 1.25 X 20, 4.8	1
18	01684	()	Washer, Flat, 0.27b 0.69d .05, Ss	2
19	08712	()	Nut, Hex, Lock, M6 X 1.00, NI, Ss	2
20	1069316	()	Screw, Pan, Phl, M4 X 0.70 X 20, Blk	2
21	1035394	()	Washer, Flat, 0.17b 0.38d .04, Ss	2
22	1271487	()	Latch, Hook	1
23	1273759	()	Bushing, Sltd, Sqge	1

▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

SIDE SQUEEGEE GROUP, LEFT

358117

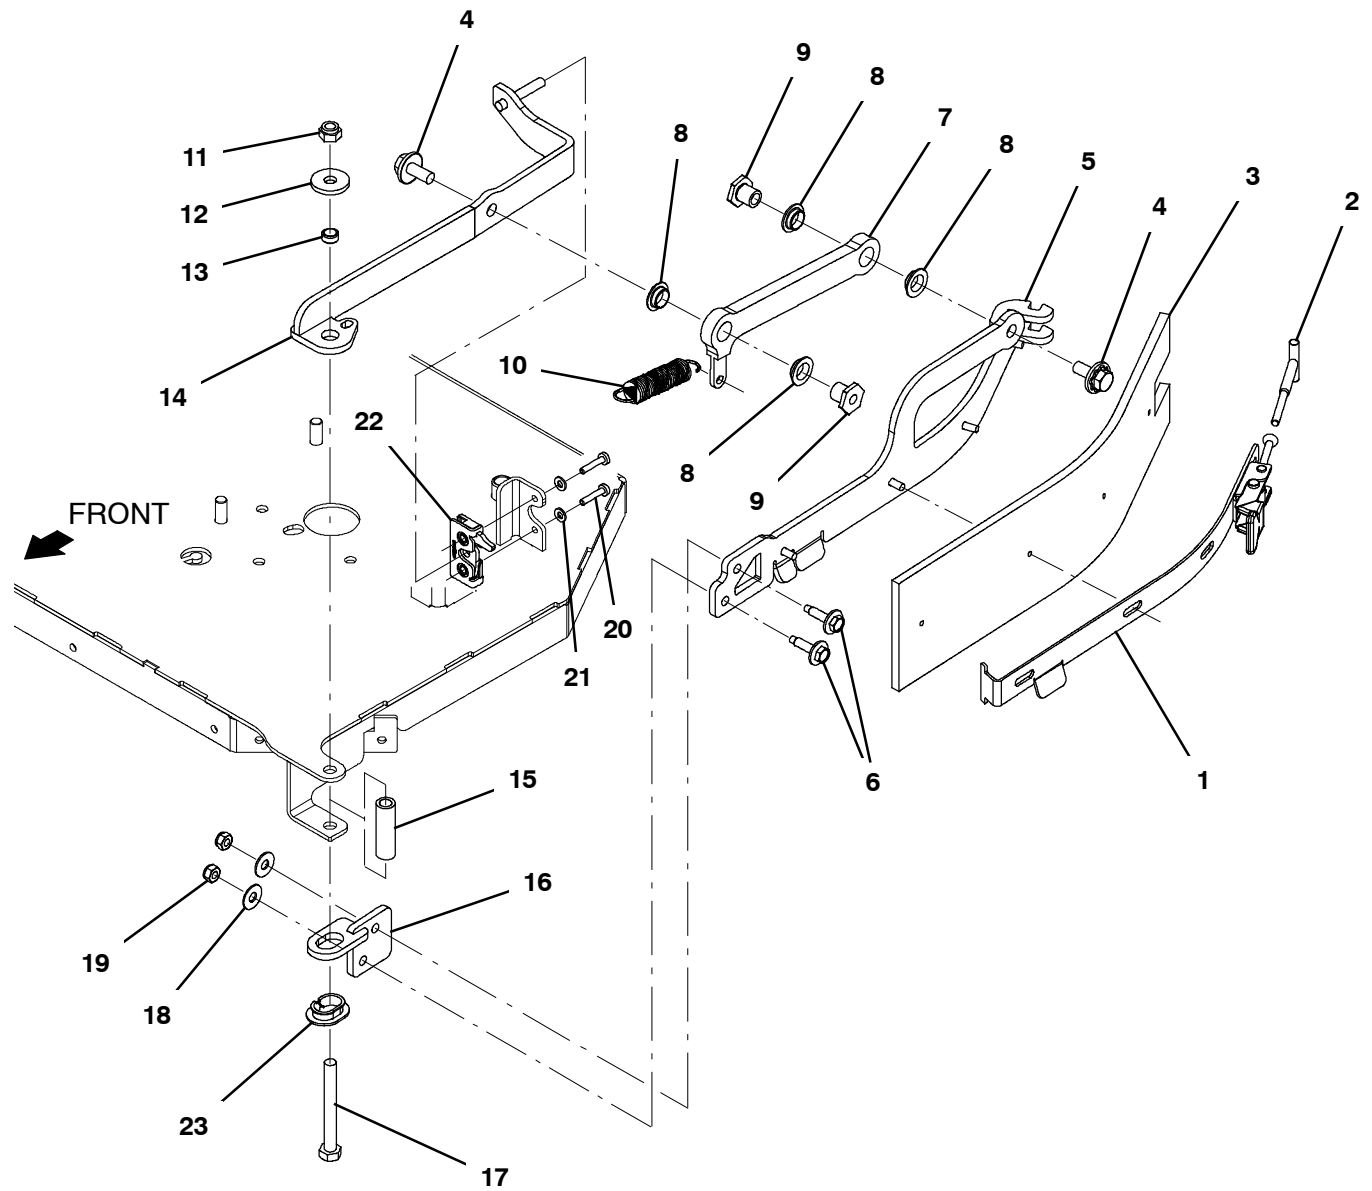


SIDE SQUEEGEE GROUP, LEFT

Ref.	Part No.	Serial Number	Description	Qty.
1	1271422	()	Strap Assy, Sqge, Lh	1
2	1269128	()	Hook Wldt, Latch	1
▽	3	9023400	() Side Sqge Blades, Primo [X6 Rovr] (Standard)	1
▲	1271415	()	Blade, Sqge, Side [Primo] (Standard)	2
▽	3	9023324	() Blades, Sqge, Side, Linatex [X6 Rovr] (Option)	1
▲	1272100	()	Blade, Sqge, Side [Linatex] (Option)	2
4	1020341	()	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	2
5	1271419	()	Bracket Wldt, Mtg, Sqge, Lh	1
6	1036892	()	Screw, Hex, M6 X 1.00 X 25, 9.8, Sems	2
▽	7	9023452	() Link Kit, Afmkt [X6 W/ Bushings]	1
▲	8	1270972	() Bushing, Fling, 12.0b 5.0l 14.0d, Plstc	4
9	1266672	()	Nut, T, M8 12mmd 12mml	2
10	1014131	()	Spring, Extn, 0.620d 0.06wir 0.3.0l, Pl	1
11	08713	()	Nut, Hex, Lock, M8 X 1.25, NI, Ss	1
12	1017218	()	Washer, Flat, 0.32b 1.00d .12, Ss	1
13	1066720	()	Sleeve, P/M, 0.32b 0.44d 0.2l [430ss]	1
14	1271416	()	Bracket Wldt, Sqge, Lh	1
15	1272295	()	Sleeve, 0.33b X 0.50d X 1.63l	1
16	1274612	()	Bracket Wldt, Sqge, Corner, Lh	1
17	09737	()	Screw, Pan, Phl, M8 X 1.25 X 20, 4.8	1
18	01684	()	Washer, Flat, 0.27b 0.69d .05, Ss	2
19	08712	()	Nut, Hex, Lock, M6 X 1.00, NI, Ss	2
20	1069316	()	Screw, Pan, Phl, M4 X 0.70 X 20, Blk	2
21	1035394	()	Washer, Flat, 0.17b 0.38d .04, Ss	2
22	1271487	()	Latch, Hook	1
23	1273759	()	Bushing, Sltd, Sqge	1

▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

SOLUTION GROUP, CONVENTIONAL

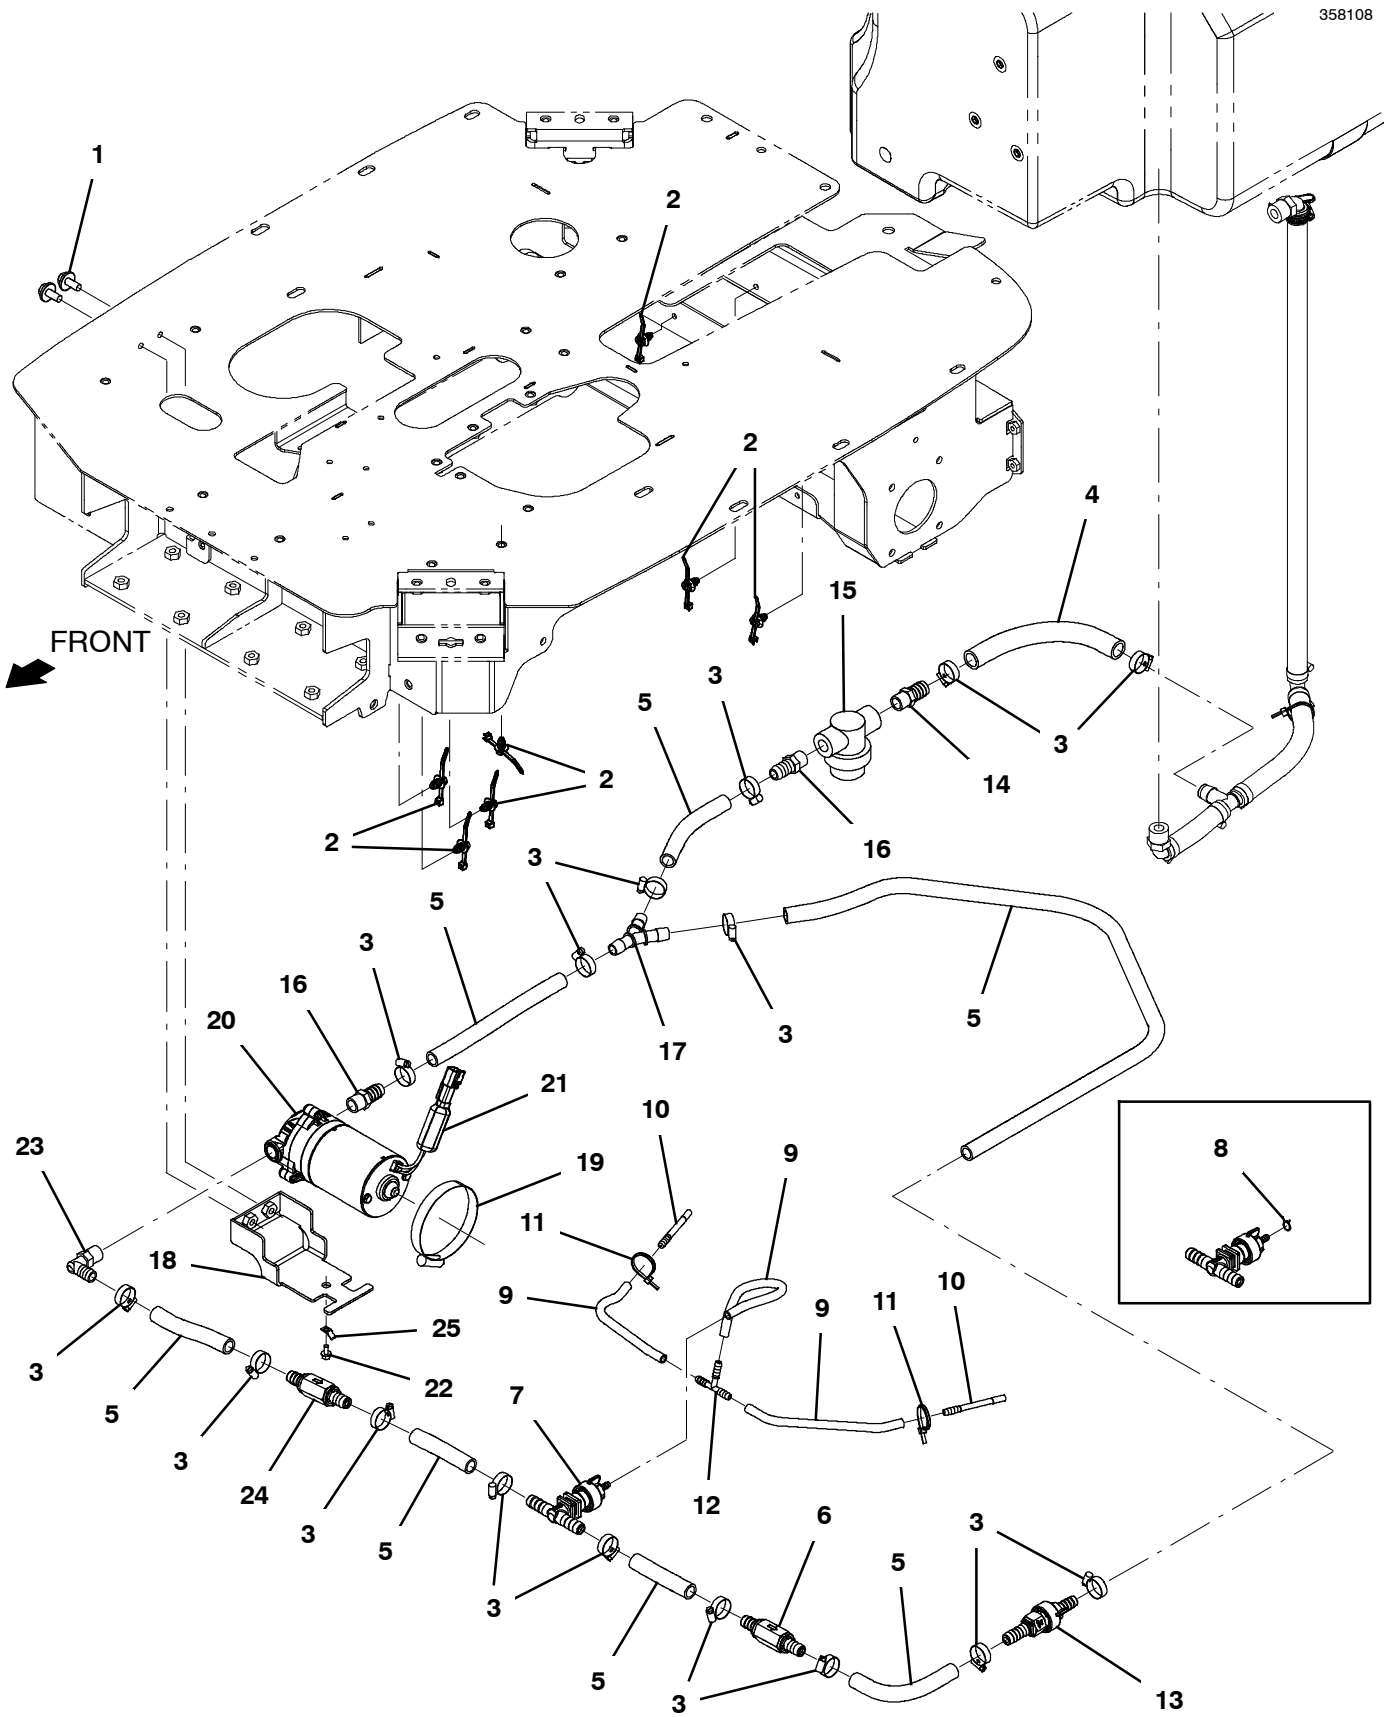


SOLUTION GROUP, CONVENTIONAL

Ref.	Part No.	Serial Number	Description	Qty.	
1	1020341	()	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	2	
2	1210807	()	Wire, Tie [W/.25" Fir Tree Clip]	7	
3	54333	()	Clamp, Hose, Wormdrive, 0.31- 0.88d, .31w	16	
4	605099	()	Hose, Pvc, Clr, 0.62id 0.88od 003.0l	1	
5	1015067	()	Hose, Afmkt, Pvc, Clr, 0.50id, 08ft	1	
6	1010614	()	Valve, Check, 2gpm, .5psi Bm08/Bm08	1	
7	1267768	()	Fitting Assy, T, 0.067b, Bm08/Bm08/Bm04	1	
8	1271557	(10000000- 11121692)	Clamp, Hose, Wir, .375 [Dbl Wire]	1	
9	1014986	()	Hose, Afmkt, Pvc, Clr, 0.25id, 02ft	1	
10	1271304	()	Tube, Solution	2	
11	130773	()	Tie, Cable, Nyl, 11.0l, .14w, 3.0 Max. D	2	
12	150713	()	Fitting, Plstc, Tee, Bm04/Bm04/Bm04	1	
13	1267769	()	Fitting Assy, Str, 0.067b, Bm08/Bm08	1	
14	1013900	()	Fitting, Plstc, Str, Bm10/Pm06, Nyl	1	
▽	15	1211537	()	Filter, In- Line [80 Mesh, Fine, White]	1
▲		1218885	()	Gasket [Epdm, F/1211537]	1
▲		1218883	()	Screen, Fltr, 80 Mesh, Ss [Fine, White]	1
▲		613991	()	Bowl, Clr, Short, F/1005302	1
16	64743	()	Fitting, Plstc, Str, Bm08/Pm06	2	
17	1010668	()	Fitting, Plstc, Y, Bm08/Bm08/Bm08, Nyl	1	
18	1269837	()	Plate Wldt, Mtg, Pump	1	
19	43555	()	Clamp, Hose, Wormdrive, 2.62- 3.50d	1	
20	9023138	()	Pump Kit, Afmkt	1	
21	1227867	()	Inductor, Ferrite [Split Case,407@100hz]	2	
22	223198	()	Screw, Hex, M5 X 0.80 X 10, Fmg	1	
23	1017532	()	Fitting, Plstc, E90, Bm08/Pm06	1	
24	1263122	()	Valve, Check, 0003psi Bm08/Bm08	1	
25	1252199	()	Terminal, Spade [Faston]	1	

▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

BATTERY GROUP, LITHIUM, 24V 90AH 125 BAUD

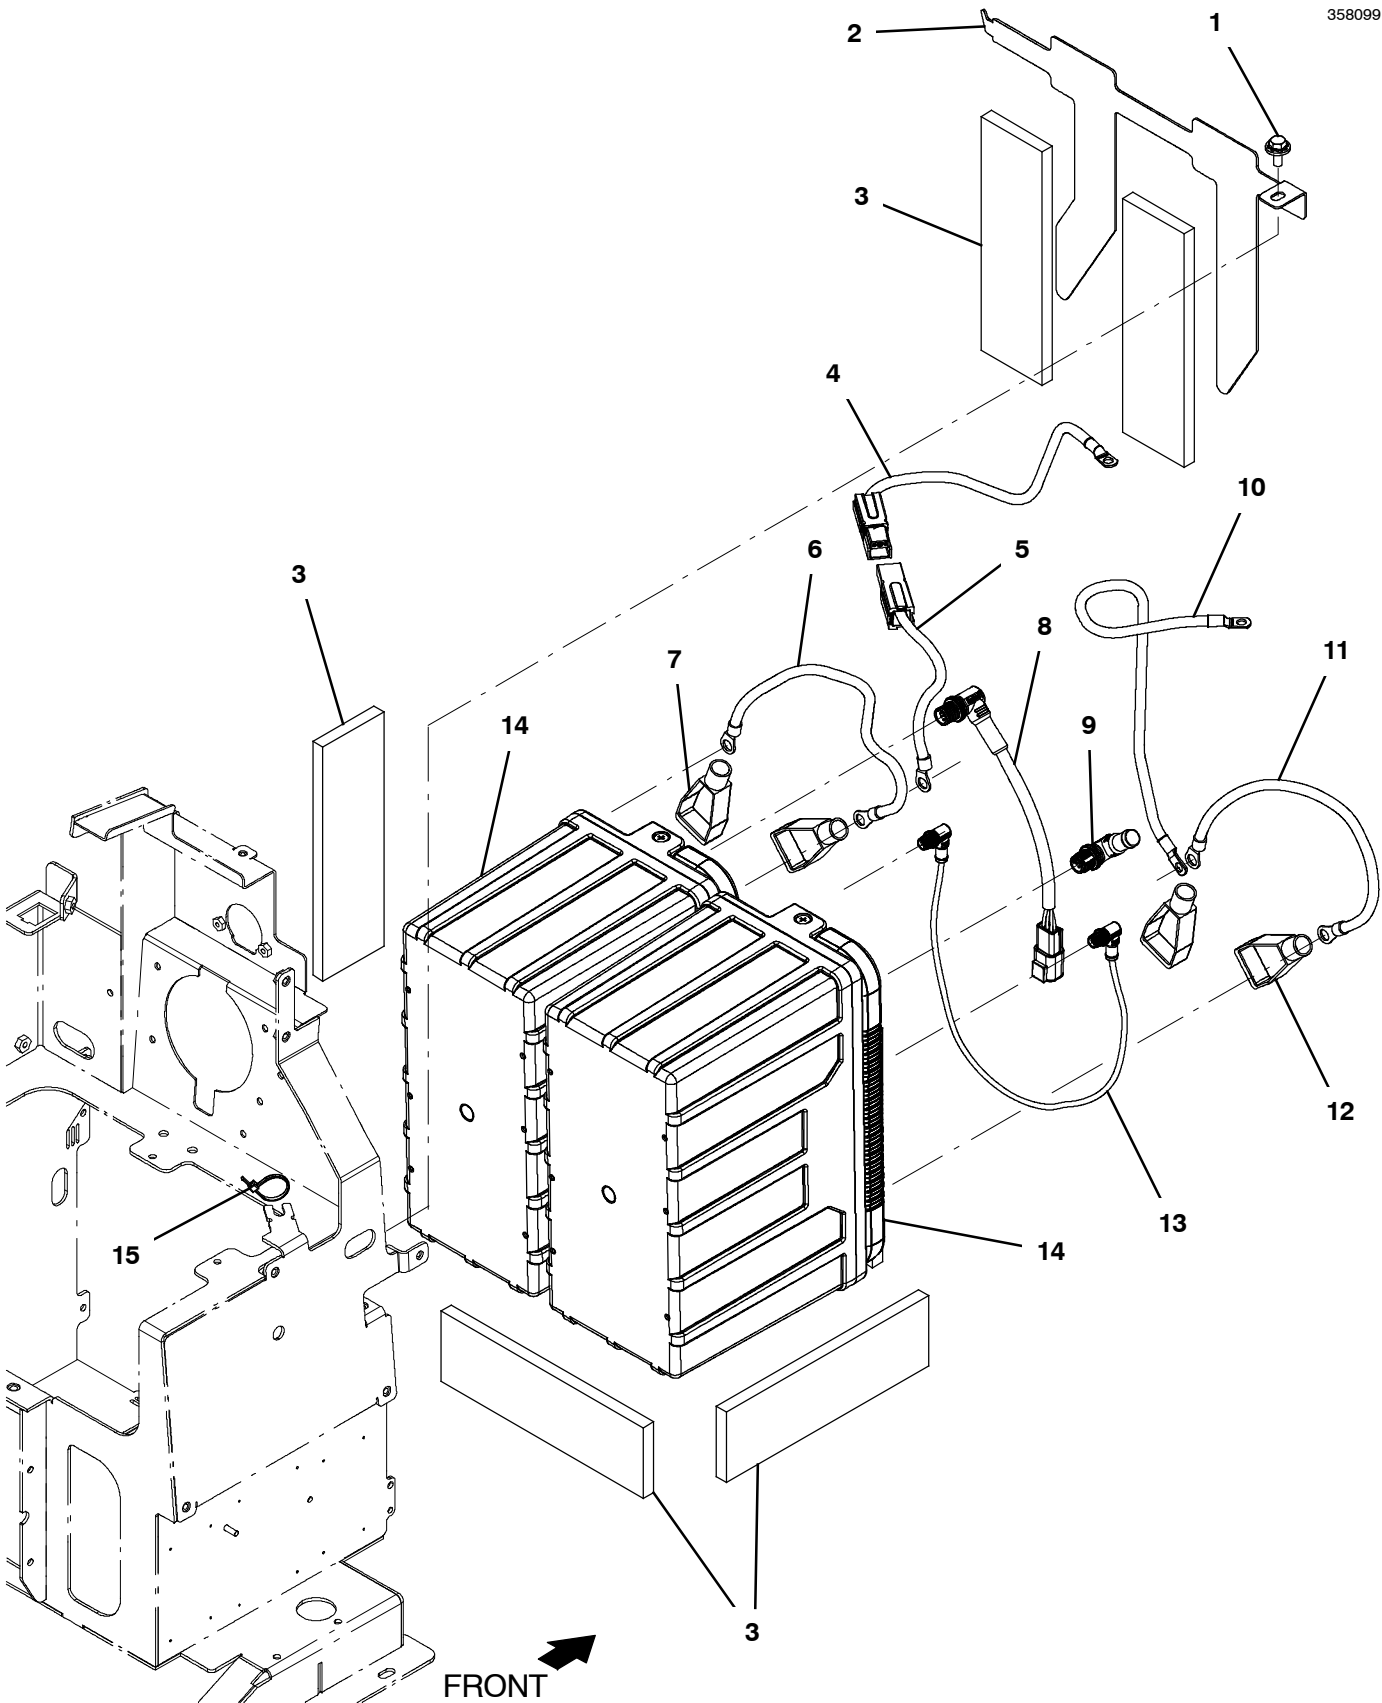

BATTERY GROUP, LITHIUM, 24V 90AH 125 BAUD


Ref.	Part No.	Serial Number	Description	Qty.
1	1020341	()	Screw, Hex, M8 X 1.25 X 20, Ss, Sems	3
2	1267898	()	Bracket, Battery, Retainer	1
3	1243754	()	Spacer, Battery, Foam, 0.50 X 3.0 X 10.0	5
▽	4	1262285	() Cable, 04ga 20.0l Red .31ring /[Pp120]	1
▲		1020446	() Connector, Anderson, 1321 Series	1
▽	5	1077082	() Cable, 04ga 10.0l Red .41ring /[Pp120]	1
▲		1020446	() Connector, Anderson, 1321 Series	1
	6	1077083	() Cable, 04ga 18.0l Red .41ring /.41ring	1
	7	68873	() Boot, Terminal, Battery, 02- 01ga, Red	2
	8	1077250	() Harness, Ele [Signals, Bms To Harn]	1
	9	1077081	() Resistor, Ele, Plug [120, 1/2w, 5%]	1
	10	1262259	() Cable, 04ga 24.0l Blk .31ring/.31ring	1
	11	223364	() Cable, 04ga 18.0l Blk .34ring /.34ring	1
	12	68872	() Boot, Terminal, Battery, 02- 01ga, Blk	2
	13	1269588	() Harness, Ele, [Bms To Harness Dual Batt]	1
	14	4045776	(11132614-) Battery, Replmt, Li- Ion, 24v [T300/T500]	2
	14	1267041	(10000000- 11132613) Battery, Lithium, 24vdc, 90ah, 125 Baud	2
	15	130773	() Tie, Cable, Nyl, 11.0l, .14w, 3.0 Max. D	1

▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

ON-BOARD BATTERY CHARGER GROUP

358109

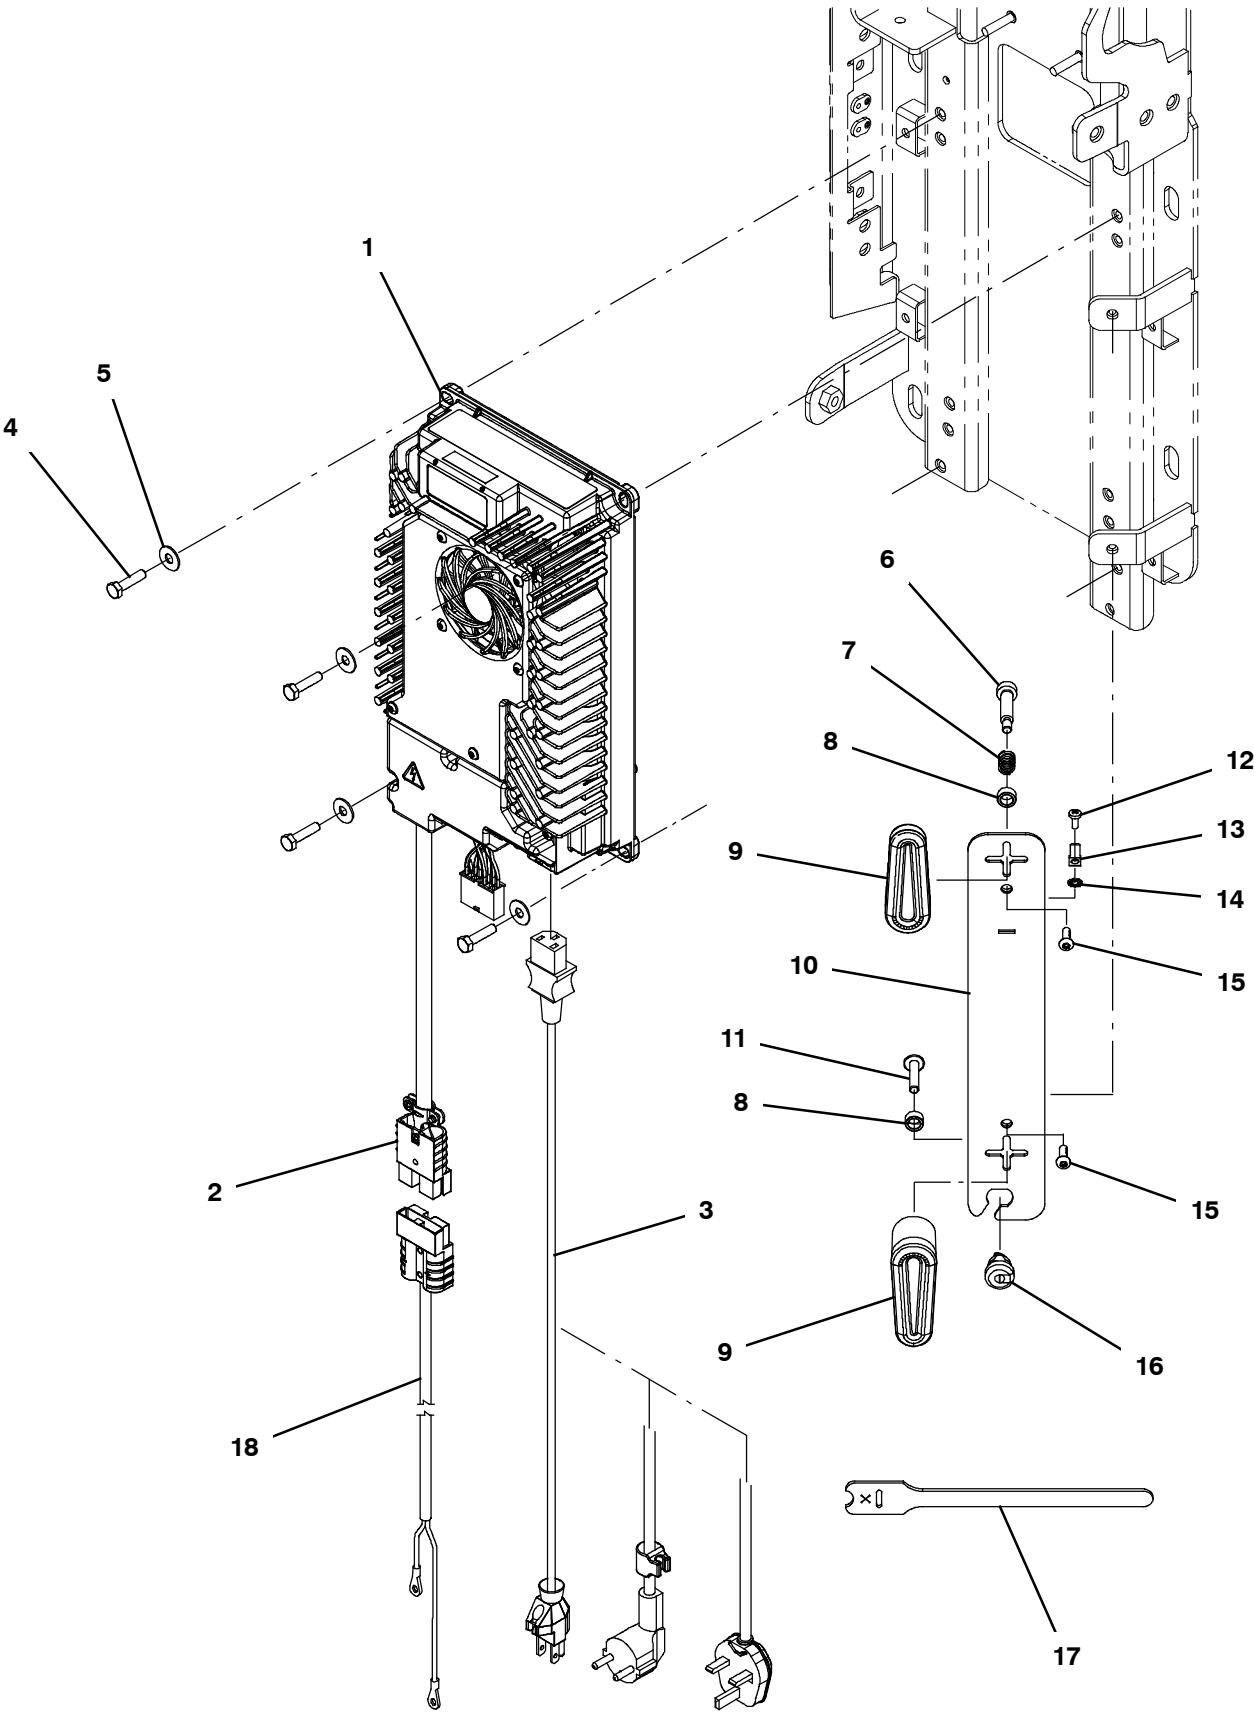

ON- BOARD BATTERY CHARGER GROUP

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	1268107	()	Charger, 24vdc 1000w[Sealed Conn, Onbrd]	1
▲	2	605387	()	Connector, Anderson, 050a, Red [W/O Con]	1
	3	1025642	()	Cord, Power, 16/3, 15ft Blk [Us] (NA / AUS)	1
	3	1032849	()	Cord, Power, Blk [4.5meter, Ce] (EMEA)	1
	3	1032820	()	Cord, Power, Blk [4.5meter, Uk]	1
	4	1016005	()	Screw, Hex, M6 X 1.00 X 25, NI, Fl, Ss	4
	5	01684	()	Washer, Flat, 0.27b 0.69d .05, Ss	4
	6	1024965	()	Bolt, Shld, 08mmd X 030mm, M06 X 1.0	1
	7	611311	()	Spring, Cmpr, 0.40od .05wir 00.5l, Pl,Mw	1
	8	1014668	()	Bushing, Sleeve, 8mmb 12mmd 6mml	2
	9	1205496	()	Hook, Cord	2
	10	9023071	()	Cord Wrap Wldt, Afmkt	1
	11	1248098	()	Screw, Btn, Flng, M6 X 1.0 X 30, 10.9	1
	12	49697	()	Screw, Pan, Phl, M4 X 0.70 X 10, Ss	1
	13	1252199	()	Terminal, Spade [Faston]	1
	14	140061	()	Washer, Lock, Ext, 08, Pl	1
	15	1205799	()	Screw, Btn, M5 X 0.8 X 16, 8.8, NI, Torx	2
	16	130110	()	Strainrelief, Bshg [Sr6l- 1]	1
	17	1067526	()	Fastener, 8.0l [Hook And Loop]	1
	18	1270697	()	Harness, Chrgr, 8ga [M8 Ring/M8ring]	1

NA = North America

EMEA = Europe, Middle East, and Africa

UK = United Kingdom


AUS = Australia

▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

OFF- BOARD BATTERY CHARGER GROUP

358118

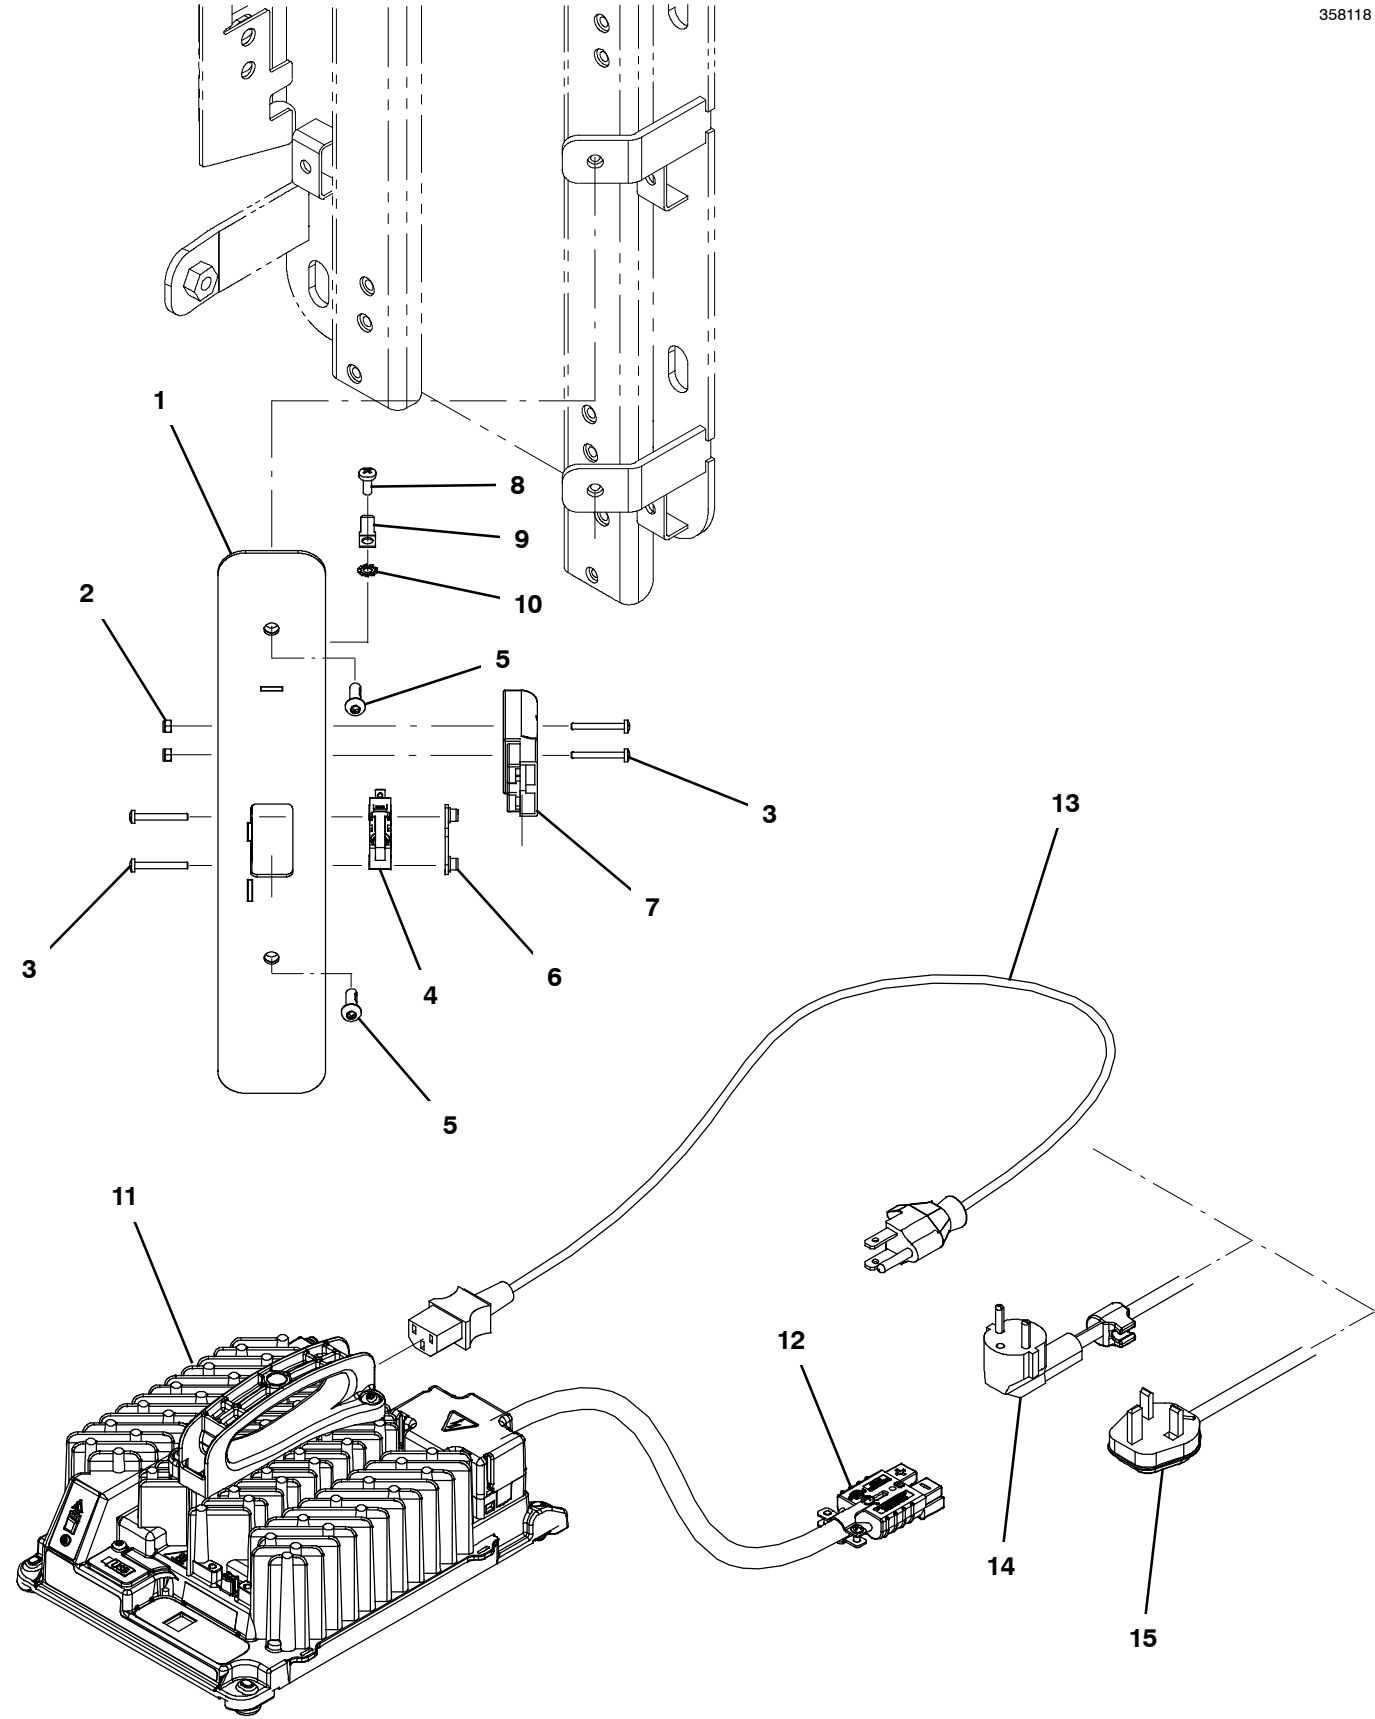

OFF- BOARD BATTERY CHARGER GROUP

Ref.	Part No.	Serial Number	Description	Qty.	
1	9023457	()	Plate Afmkt, Charging [Offboard Rovr]	1	
2	579211	()	Nut, Hex, Lock, M3 X 0.50, NI, Ss	2	
3	33933	()	Screw, Pan, Phl, M3 X 1.50 X 25, Ss	4	
4	1264508	()	Switch, Micro, 0.1a, Spdt, Ip67, Au	1	
5	1205799	()	Screw, Btn, M5 X 0.8 X 16, 8.8, NI, Torx	2	
	6	1013705	()	Plate, Thread, Switch, M3 Nut, 96hr PI	1
▽	7	1270697	()	Harness, Chrgr, 8ga [M8 Ring/M8ring]	1
▲		605387	()	Connector, Anderson, 050a, Red [W/O Con]	1
	8	49697	()	Screw, Pan, Phl, M4 X 0.70 X 10, Ss	1
	9	1252199	()	Terminal, Spade [Faston]	1
	10	140061	()	Washer, Lock, Ext, 08, PI	1
▽	11	1274229	()	Charger, 24vdc, 650w, 100- 240vac [Off Br	1
▲	12	605387	()	Connector, Anderson, 050a, Red [W/O Con]	1
	13	1025642	()	Cord, Power, 16/3, 15ft Blk [Us] (NA / AUS)	1
	14	1032849	()	Cord, Power, Blk [4.5meter, Ce] (EMEA)	1
	15	1032820	()	Cord, Power, Blk [4.5meter, Uk]	1

NA = North America

EMEA = Europe, Middle East, and Africa


AUS = Australia

▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

LABEL GROUP (NA / AUS)

358119




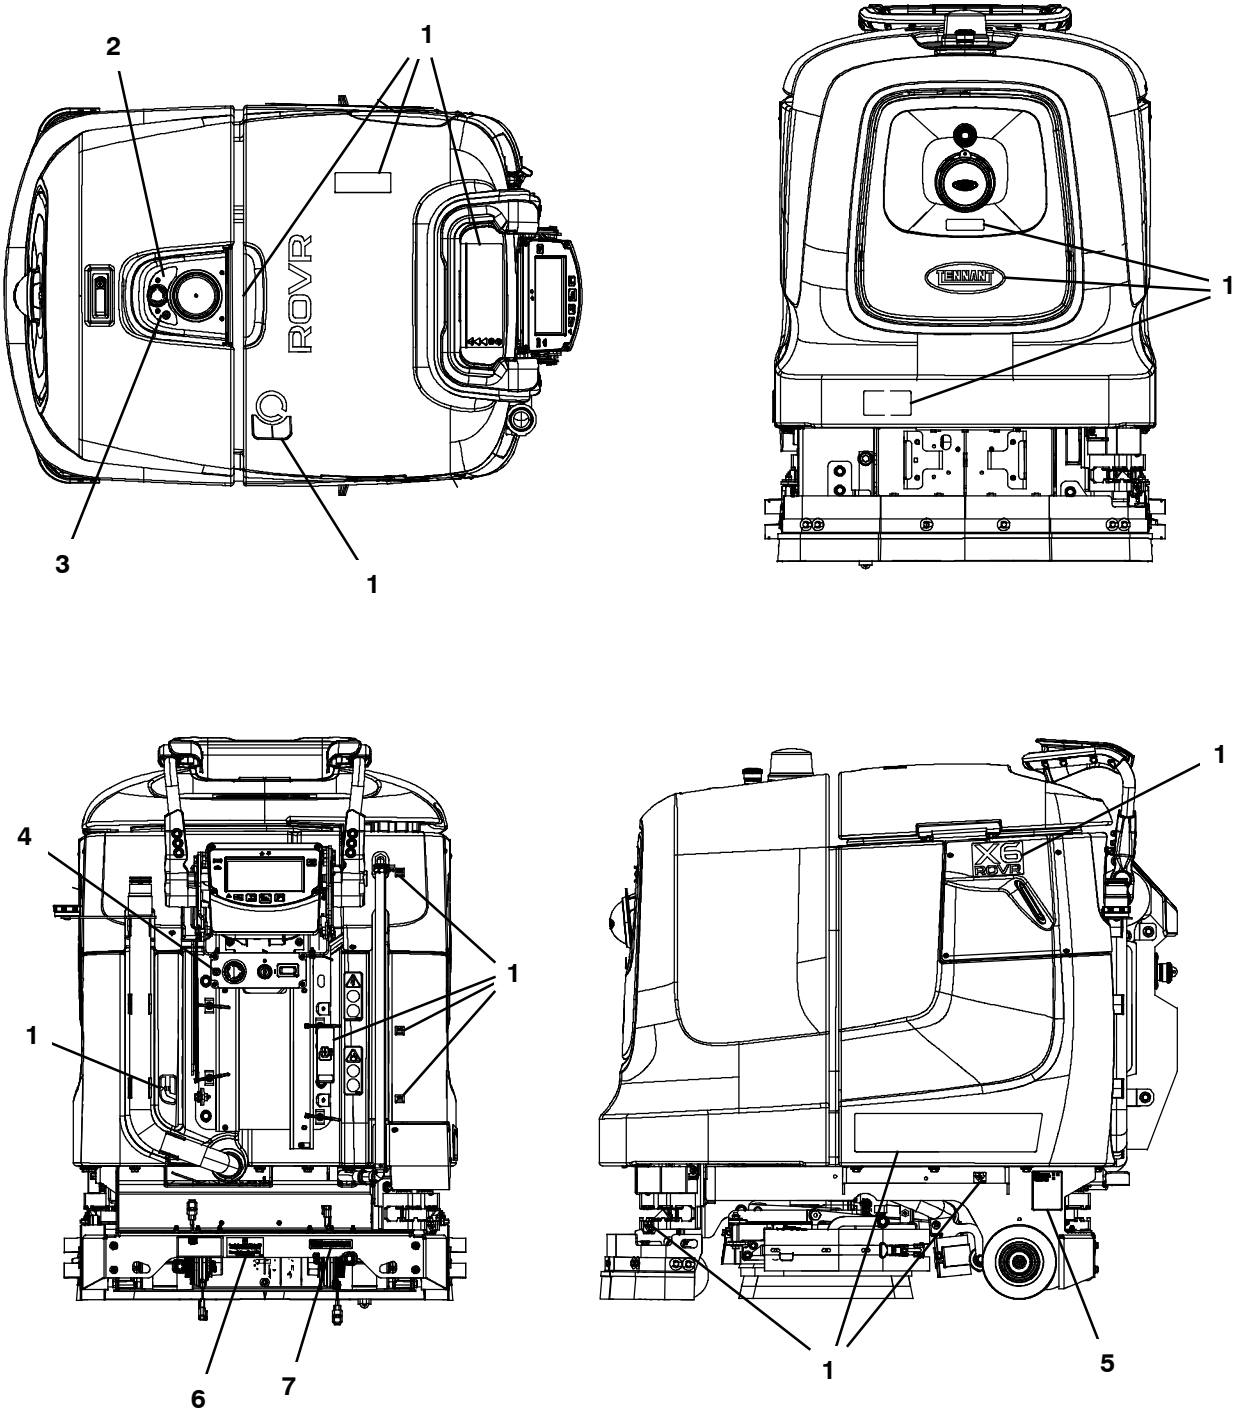


Ref.	Part No.	Serial Number	Description	Qty.
1	1272257	()	Label Kit, Info / Hzrd [Na] (NA / AUS)	1
2	1263756	()	Label,E- Stop, Lh	1
3	1265467	()	Label, E- Stop, Rh	1
4	1263736	()	Label, Switch, Opertnl	1
5	1259755	()	Label, Mach, Telem [Bg95/Bg96]	1
6	1249760	()	Label, Info, Usa	1
7	1026756	()	Label, Info [Sales & Service: Phone #]	1

NA = North America
AUS = Australia

LABEL GROUP (EMEA)

358020

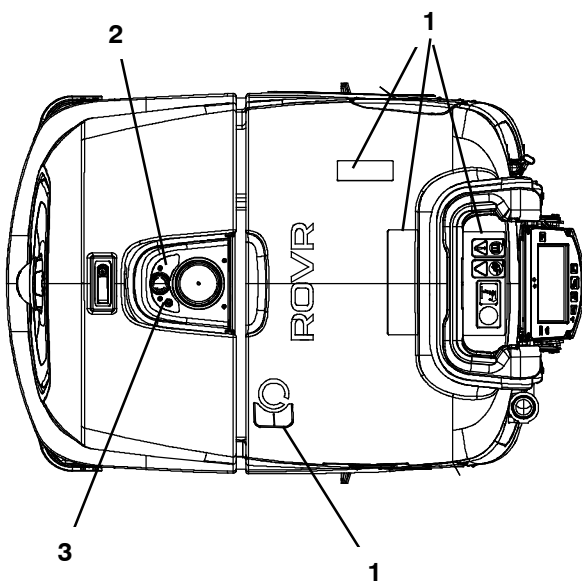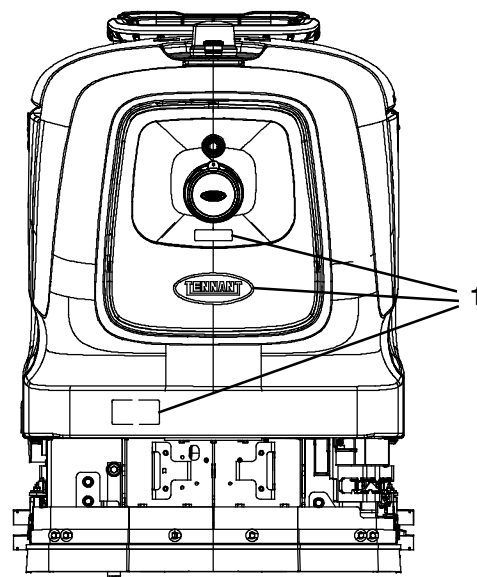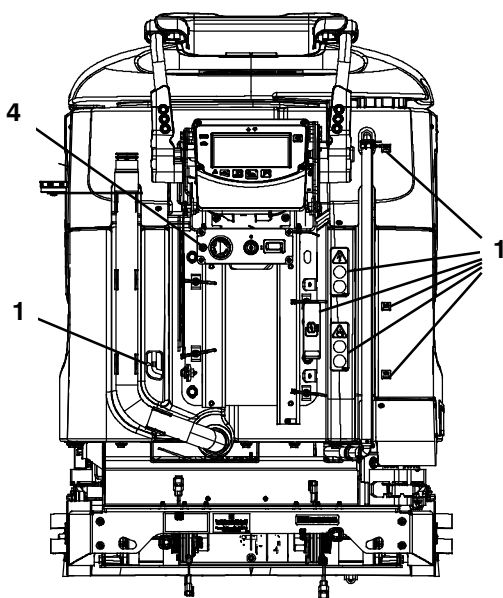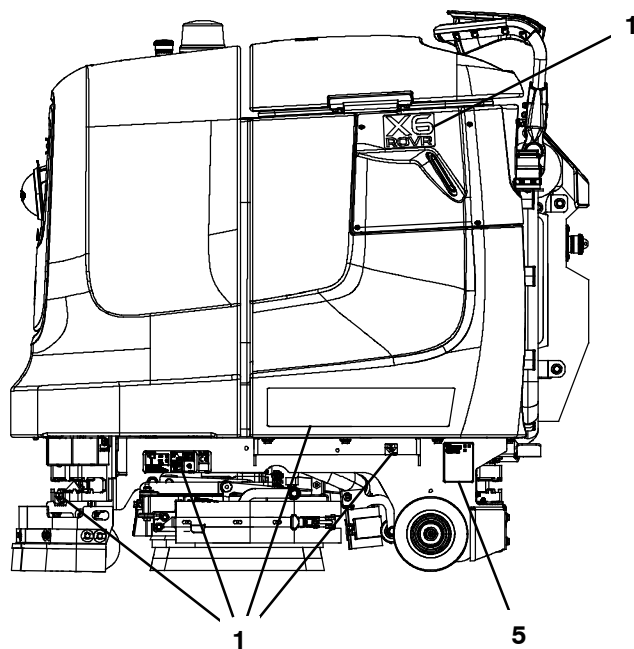


Ref.	Part No.	Serial Number	Description	Qty.
1	1272258	()	Label Kit, Info / Hrzd [Ce] (EMEA)	1
2	1263756	()	Label,E- Stop, Lh	1
3	1265467	()	Label, E- Stop, Rh	1
4	1263736	()	Label, Switch, Opertnl	1
5	1259755	()	Label, Mach, Telem [Bg95/Bg96]	1

EMEA = Europe, Middle East, and Africa




CABLE GROUP (Page 1 of 3)

358008

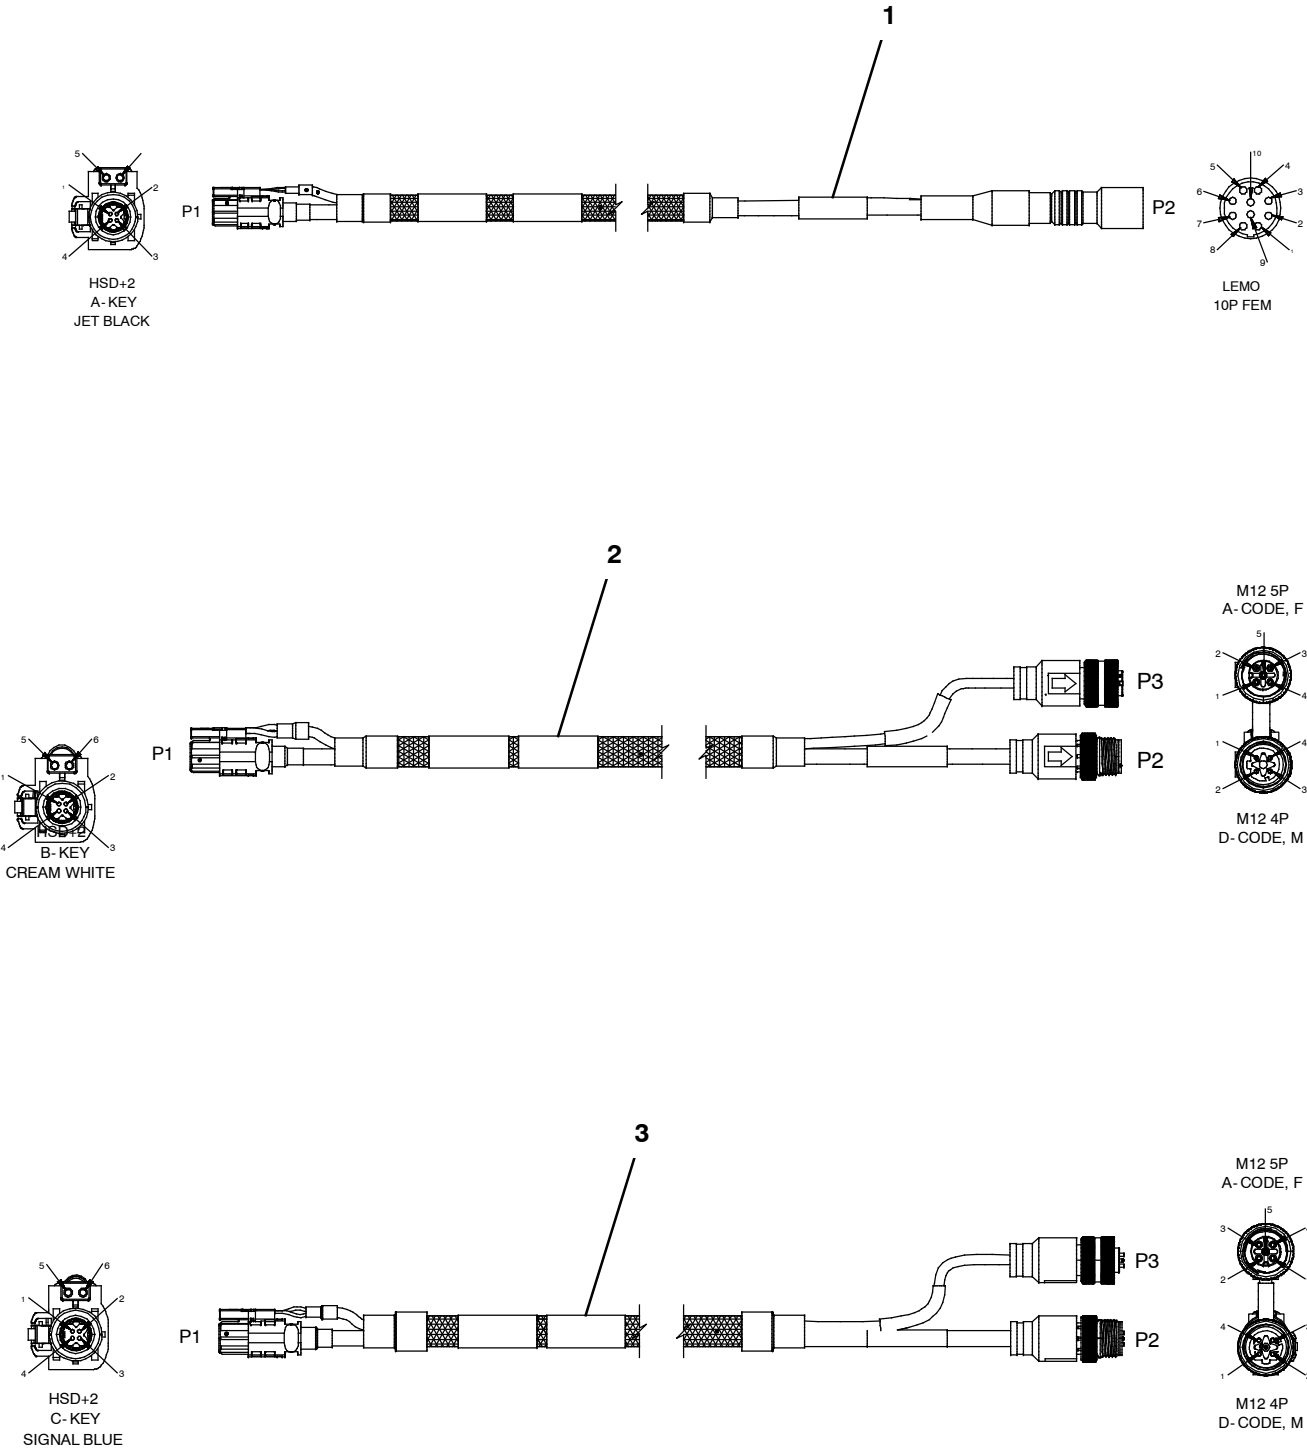


CABLE GROUP (Page 2 of 3)

358008

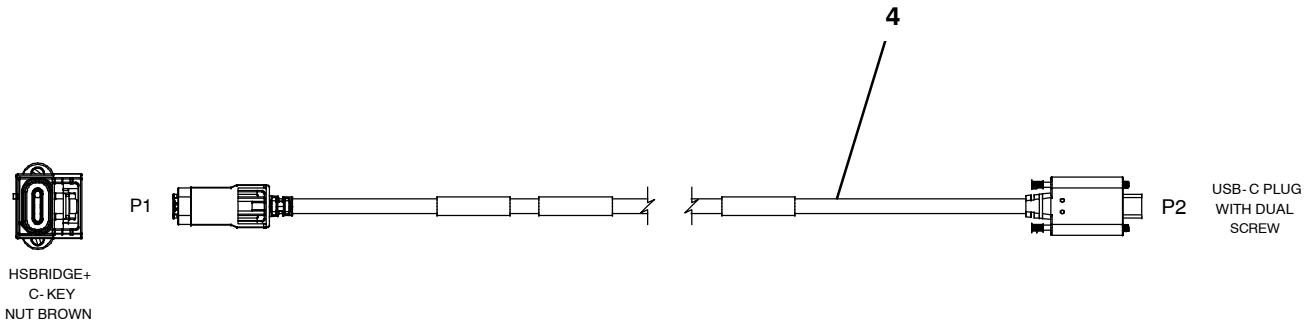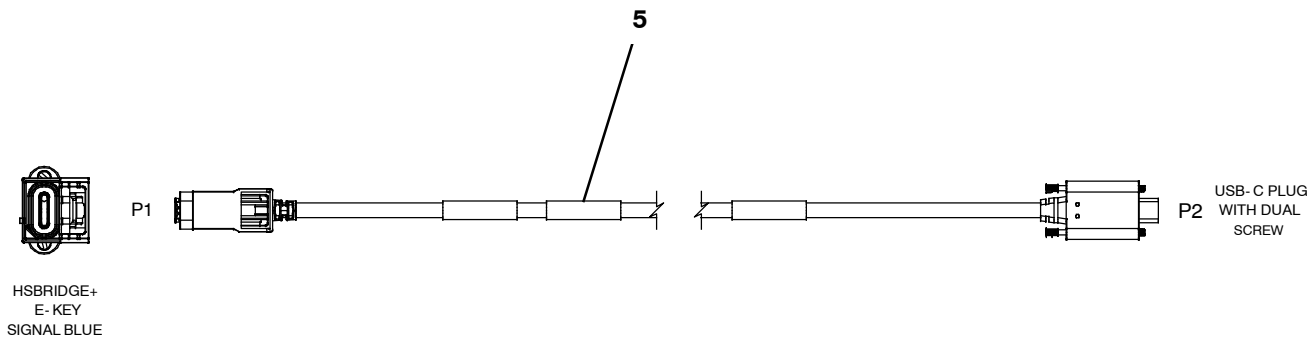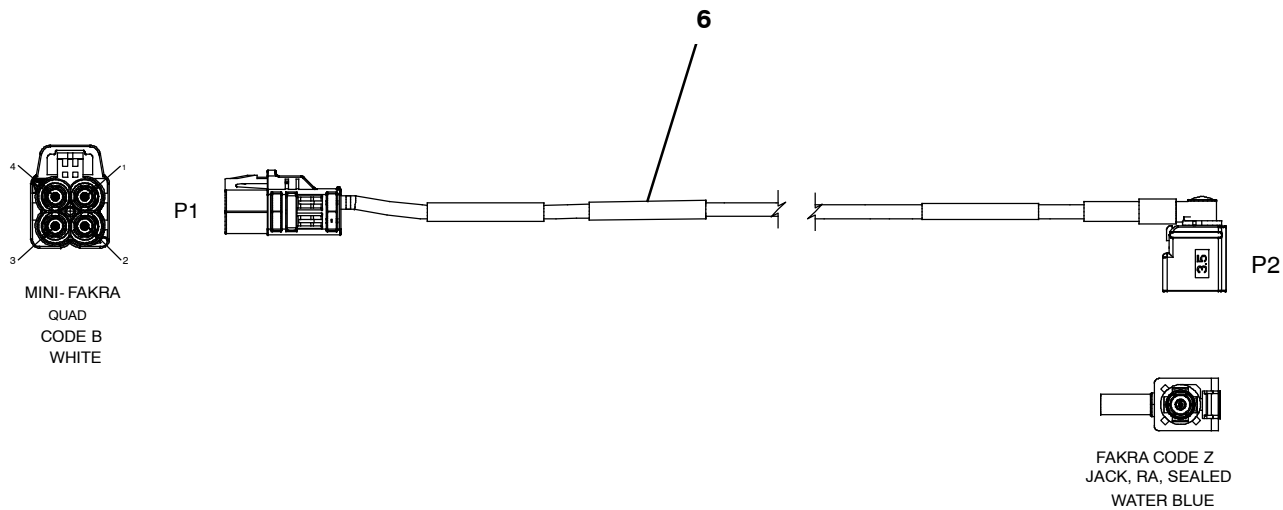

CABLE GROUP (Page 3 of 3)

358008

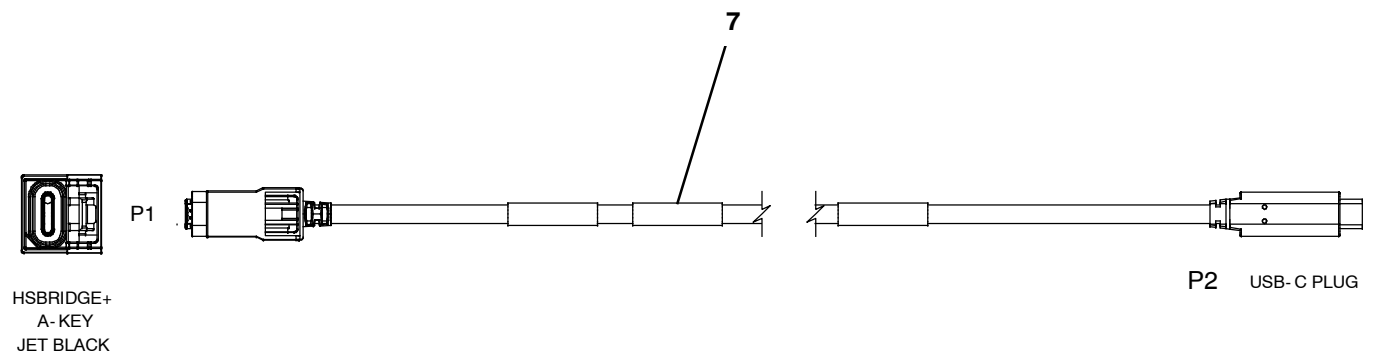


Ref.	Part No.	Serial Number	Description	Qty.
1	1268303	()	Cable, Amr, 1.3m L [3d Lidar]	1
2	1268304	()	Cable, Amr, 0.65m L [Front 2d Lidar]	1
3	1268305	()	Cable, Amr, 1.5m L [Rear 2d Lidar]	1
4	1270177	()	Cable, Amr, 2.4m L [Left 3d Camera]	1
5	1270178	()	Cable, Amr, 2.4m L [Right 3d Camera]	1
6	1268308	()	Cable, Amr, 1.0m L [Front 2d Camera]	1
7	1268309	()	Cable, Amr, 2.2m L [Lcd Touchscreen]	1

WIRE HARNESS GROUP

Ref.	Part No.	Serial Number	Description	Qty.
1	1269211	()	Harness, Ele, Main [X6 Rovr]	1
2	1269788	()	Harness, Ele, Ui [X6]	1
3	1265234	()	Harness, Ele, [Key Estop Jumper]	1
4	1270931	()	Cable, 1.3m L [Usb,Mini- B,Male 90d,Fem]	1
5	1268490	()	Cable [Usb Mini B Fem, Usb Mini B M]	1
6	1077084	()	Cable Assy, 8 Pos, Male To Male, 19.7l	1
7	1270307	()	Harness, Ele, [Microswitch Jumper]	1
8	4231981	()	Harness, Ele [Jumper, M8 Ring, .250m]	1

CHARGING STATION, OFF- BOARD BATTERY CHARGER, 24V 650W

358122

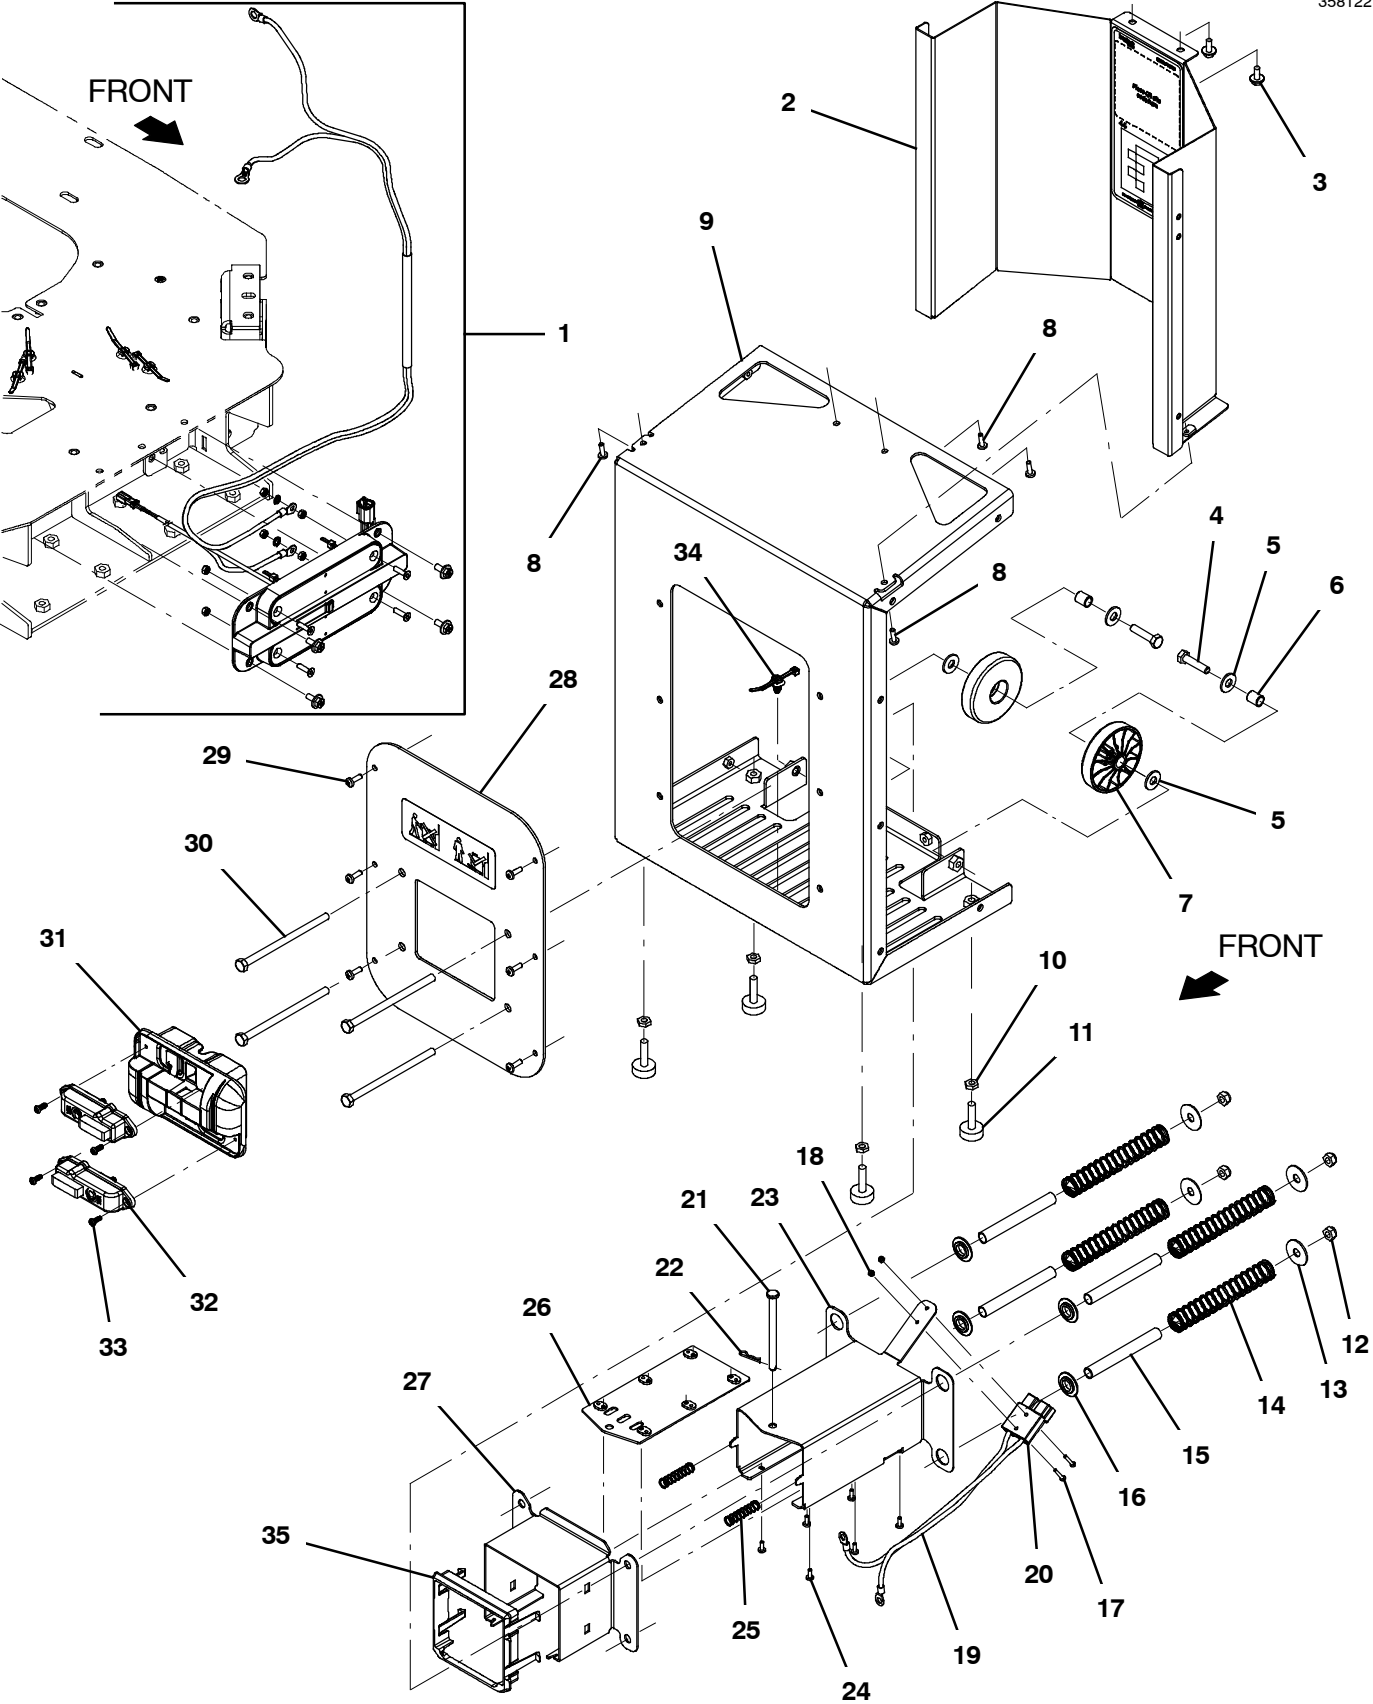

CHARGING STATION, OFF- BOARD BATTERY CHARGER, 24V 650W

(Note: To Retrofit Machine to Dock Charging Option, order Region Kit 9023443*, 9023444*, 9023445*, or 9023446* and in addition must also order Kit 9023460. Includes all parts from Pages 70-73)

Ref.	Part No.	Serial Number	Description	Qty.
▽	9023460*	()	Parts Kit, Retrofit, Dock, Mach	1
▲ 1	9023458*	()	Parts Kit, Contact Assy, Auto, Afmkt [X6 (See Breakdowns)]	1
▽	9023443*	()	Parts Kit, Dock, Chrgr, Us, Ci [Xc1/X6]	1
▽	9023445*	()	Parts Kit, Dock, Chrgr, Ce, Ci [Xc1/X6]	1
▽	9023444*	()	Parts Kit, Dock, Chrgr, Uk, Ci [Xc1/X6]	1
▽	9023446*	()	Parts Kit, Dock, Chrgr, Aus, Ci [Xc1/X6]	1
▲ 2	9023583	()	Parts Kit, Dock, Guide, Afmkt	1
▲ 3	1034731	()	Screw, Hex, M6 X 1.00 X 16, Sems, Ss	2
▲ 4	09023	()	Screw, Hex, M8 X 1.25 X 35, Fl, Ss	2
▲ 5	01685	()	Washer, Flat, 0.38b 0.88d .08, Ss	4
▲ 6	1027926	()	Sleeve, P/M, 0.38b 0.50d 0.6l [430ss]	2
▲ 7	1010560	()	Wheel, Bmpr, 80d X 25w, Non- Marking	2
▲ 8	1045487	()	Screw, Pan, Phl, M5 X 0.80 X 16, Blk	4
▲ 9	1270957	()	Plate Wldt, Dock, Lower, Angle	1
▲ 10	200101017	()	Nut, Hex, Jam, M8 X 1.25	4
▲ 11	1039468	()	Bumper, Rbr, 1.00d 0.38th M8x1.25	4
▲ 12	08713	()	Nut, Hex, Lock, M8 X 1.25, NI, Ss	4
▲ 13	32662	()	Washer, Flat, 0.38b 1.22d .06, Ss	4
▲ 14	1273305	()	Spring, Cmpr, .91od .08wir 5.71l, Mw	4
▲ 15	1219491	()	Sleeve, 0.40id .50d 4.25l, Ss	4
▲ 16	1272791	()	Bushing, Flng, 0.52b 0.74d 0.16l, Nyl	4
▲ 17	06922	()	Screw, Pan, Phl, M3 X 0.50 X 20, 4.8	2
▲ 18	579211	()	Nut, Hex, Lock, M3 X 0.50, NI, Ss	2
▲▽ 19	1270653	()	Harness, Ele, Chrgr [24v Dock]	1
▲▲ 20	605387	()	Connector, Anderson, 050a, Red [W/O Con]	1
▲ 21	1252353	()	Pin, Clevis, 8mmd X 100mml	1
▲ 22	08085	()	Pin, Cotter, Hair, 0.31d .058 Wir	1
▲ 23	1273015	()	Plate, Slide, Chrgr, Inner	1
▲ 24	49697	()	Screw, Pan, Phl, M4 X 0.70 X 10, Ss	6
▲ 25	630082	()	Spring, Cmpr, 0.42od .04wir 01.8l, Pl,Mw	2
▲ 26	1273017	()	Plate Wldt, Bottom, Arm, Compli	1
▲ 27	1273013	()	Bracket, Arm, Chrgr, Outer	1
▲ 28	9023582	()	Parts Kit, Bracket, Service, Afmkt	1
▲ 29	1045487	()	Screw, Pan, Phl, M5 X 0.80 X 16, Blk	6
▲ 30	1273405	()	Screw, Hex, M8 X 1.25 X 130, 8.8, Blk	4
▲ 31	9023572	()	Parts Kit, Pivot, Power, Afmkt [24v 650w	1
▲ 32	1271058	()	Brush, Contact, 75a, Sgl	2
▲ 33	49162	()	Screw, Pan, Phl, 08- 16 X 0.50, F/ Plstc	4
▲ 34	1210807	()	Wire, Tie [W/.25" Fir Tree Clip]	1
▲ 35	1274373	()	Frame, Slide, Arm, Lock, Compli	1

* Requires Tennant *True* service or an authorized Tennant service provider.

US = North America

CE = Europe

UK = United Kingdom


AUS = Australia

▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

CHARGING STATION, OFF-BOARD BATTERY CHARGER, 24V 650W - CONT'D

358123

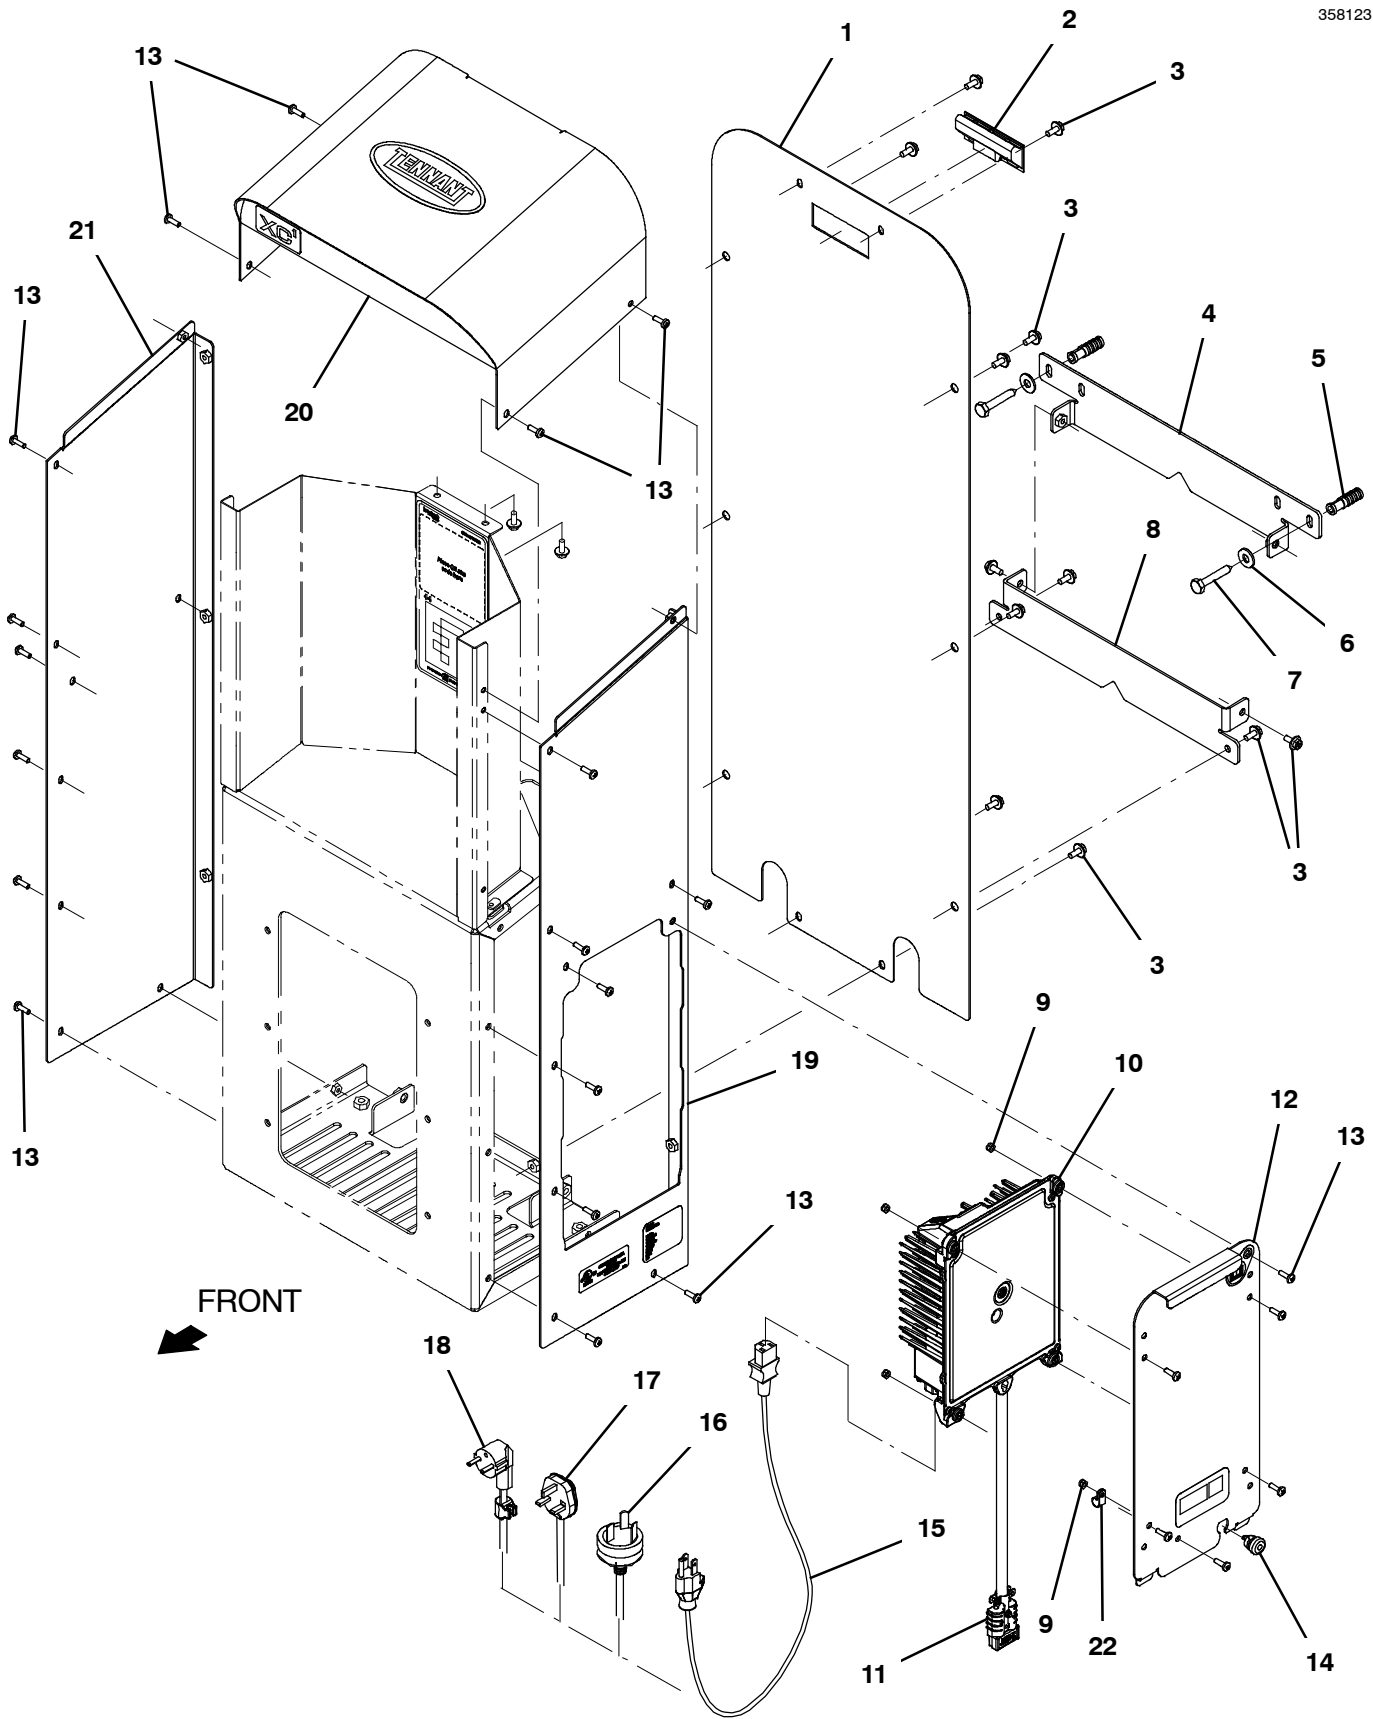

CHARGING STATION, OFF- BOARD BATTERY CHARGER, 24V 650W - CONT'D

(Note: To Retrofit Machine to Dock Charging Option, order Region Kit 9023443*, 9023444*, 9023445*, or 9023446* and in addition must also order Kit 9023460. Includes all parts from Pages 70-73)

Ref.	Part No.	Serial Number	Description	Qty.
▲	1	1271040	() Plate, Back	1
▲	2	1208187	() Handle, Panel	1
▲	3	1034731	() Screw, Hex, M6 X 1.00 X 16, Sems, Ss	12
▲	4	1272256	() Bracket Wldt, Mount, Wall	1
▲	5	1274011	() Anchor, Lag, 0.31 X 1.75l	2
▲	6	01685	() Washer, Flat, 0.38b 0.88d .08, Ss	2
▲	7	612979	() Screw, Lag, 0.31 X 2.00l, Pl	2
▲	8	1272254	() Bracket, Mount, Wall	1
▲	9	06549	() Nut, Hex, M5 X 0.80 X 16, 8.8	5
▲▽	10	1274229	() Charger, 24vdc, 650w, 100- 240vac [Off Br	1
▲▲	11	605387	() Connector, Anderson, 050a, Red [W/O Con]	1
▲	12	9023573	() Parts Kit, Chrgr, Panel, Afmkt [24v 650w (NA/AUS)	1
▲	12	9023574	() Parts Kit, Chrgr, Panel, Afmkt [24v 650w (EMEA)	1
▲	13	1045487	() Screw, Pan, Phl, M5 X 0.80 X 16, Blk	26
▲	14	130110	() Strainrelief, Bshg [Sr6l- 1]	1
▲	15	1025642	() Cord, Power, 16/3, 15ft Blk [Us]	1
▲	16	1026325	() Cord, Power, 1.0mm2/3 Blk[2.5meter, Aus]	1
▲	17	1032820	() Cord, Power, Blk [4.5meter, Uk]	1
▲	18	1032849	() Cord, Power, Blk [4.5meter, Ce]	1
▲	19	9023576	() Parts Kit, Plate Wldt, Rh, Afmkt	1
▲	20	9023575	() Parts Kit, Bracket Wldt, Afmkt	1
▲	21	1271021	() Plate Wldt, Side, Lh	1
▲	22	26395- 2	() Clamp, Cable, Stl, 0.38d X 0.38w, 1hole	1
▲	N/S	1067526	() Fastener, 8.0l [Hook And Loop]	1
▲	N/S	1275376	() Tape, Marking, Area, Dock	1
▲	N/S	1271396	() Harness, Ele, Jumper [Obc To Offbrd Sw]	1


* Requires Tennant *True* service or an authorized Tennant service provider.

▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

DUST FILTER KIT, RECOVERY TANK

358161

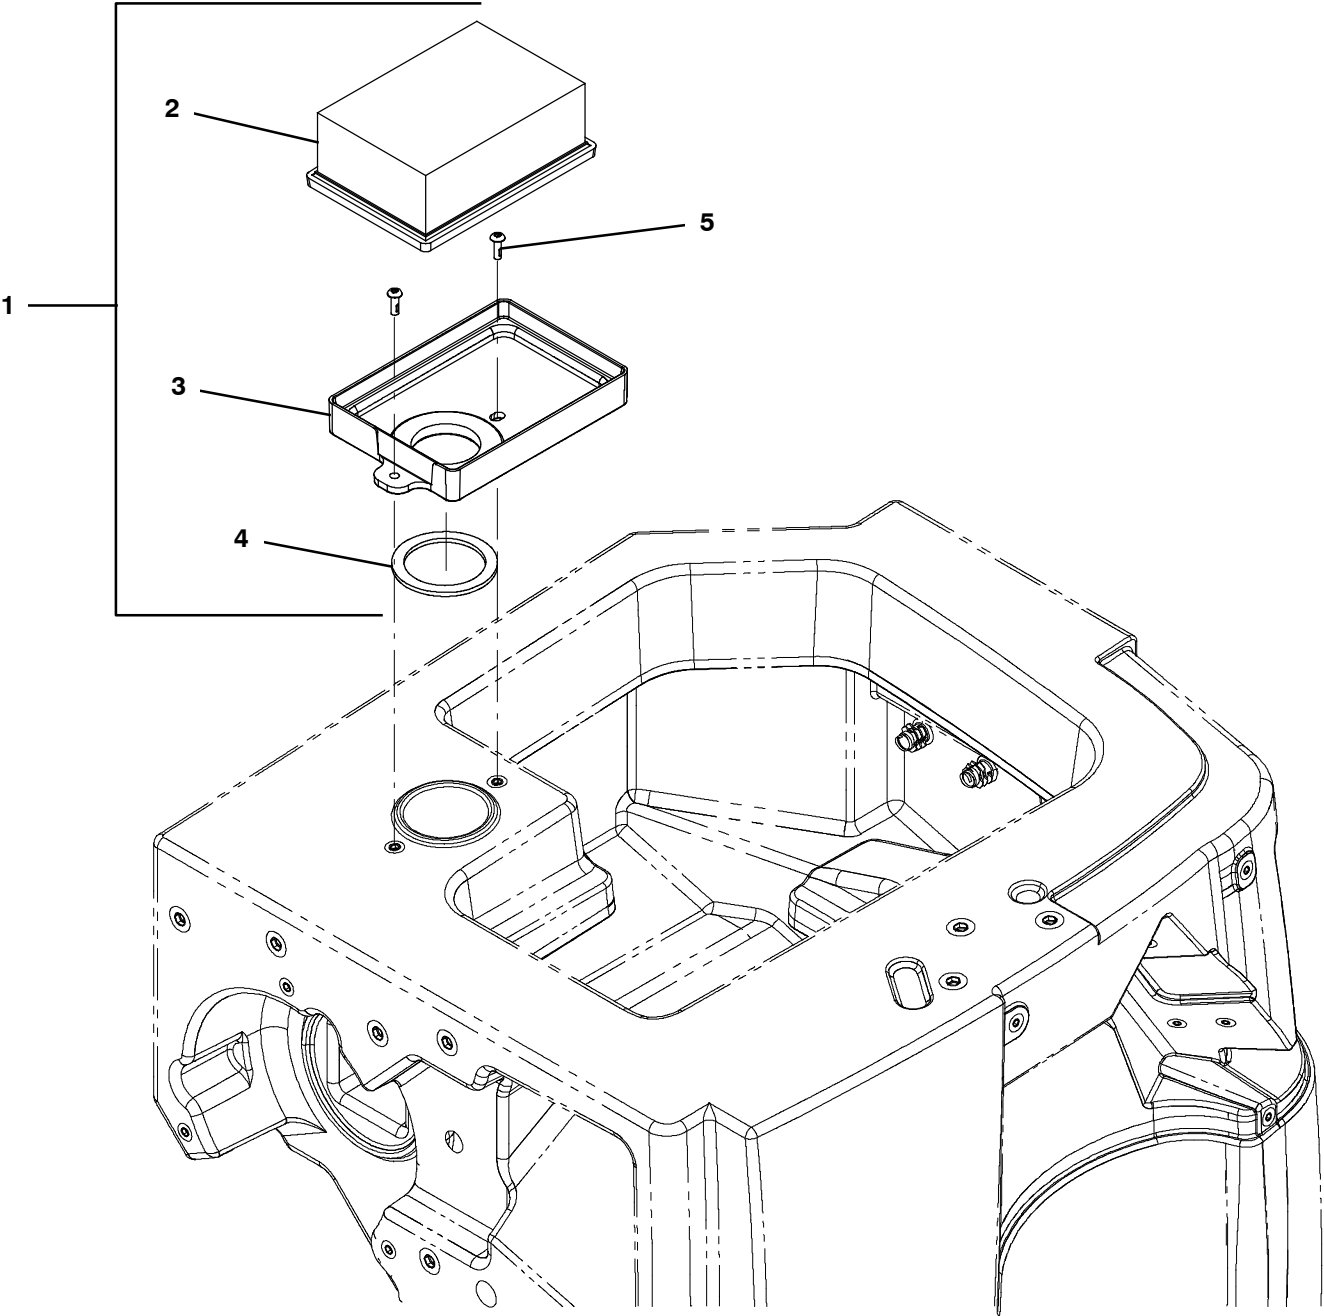


	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	4239236	()	Filter Kit, Vacuum, Ci, [X6Rovr]	1
▲	2	4043531	()	Filter, Panl, Dust, 2.3 X 04.5 X 06.4	1
▲	3	4006623	()	Tray, Adapter, Fltr[X6]	1
▲	4	4009051	()	Gasket, Filter, Adaptor [X6]	1
	5	4041143	()	Screw, Btn, M5 X 0.8 X 16, 8.8, NI, Torx (Not Included In Kit - Reuse Screws From Installed Strainer)	2

▽ ASSEMBLY
 ▲ INCLUDED IN ASSEMBLY

BLUE LIGHT KIT

358162

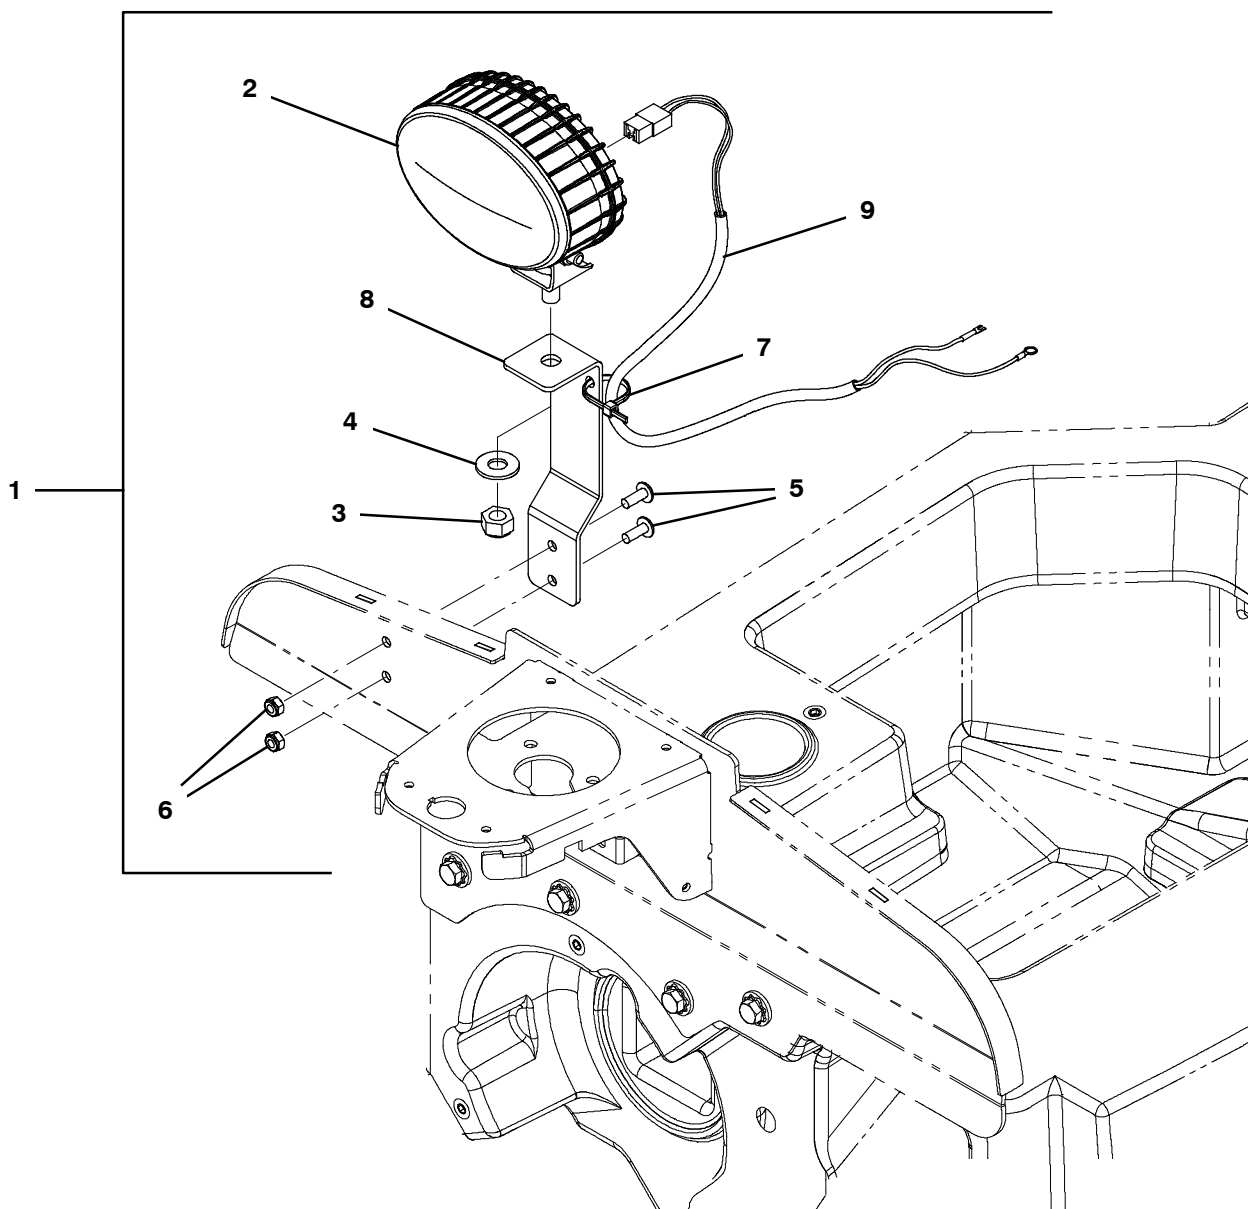

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	4239235	()	Light Kit, Blue, Ci [X6Rovr]	1
▲▽	2	4033715	()	Light, Spot, Blue, Led	1
▲▲	3	4041929	()	Nut, Hex, Lock, M8 X 1.25, NI, Ss (Included with Light)	1
▲▲	4	4016551	()	Washer, Flat, M8, Fendr (Included with Light)	1
▲	5	4022347	()	Screw, Trs, M6 X 1.00 X 16, Phl, Ss	5
▲	6	4041928	()	Nut, Hex, Lock, M6 X 1.00, NI, Ss	2
▲	7	4043510	()	Tie, Cable, Nyl, 11.0l, .14w, 3.0 Max. D	1
▲	8	4239234	()	Bracket, Mount, Light [Blue]	1
▲	9	4239239	()	Harness, Ele, Jumper Blue Light	1

▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

DOCUMENTATION GROUP

Ref.	Part No.	Serial Number	Description	Qty.
1	9030108	()	Manual, Parts [X6 Rovr Global]	1
2	9030058	()	Manual, Oprtr [X6 Rovr English, Na/Aus]	1
3	9030159	()	Manual, Oprtr [X6 Rovr Spanish, Na]	1
4	9030060	()	Manual, Oprtr [X6 Rovr French, Na]	1
5	9030100	()	Manual, Oprtr [X6 Rovr English, Ce] (EMEA)	1
6	9030101	()	Manual, Oprtr [X6 Rovr Spanish, Ce] (EMEA)	1
7	9030102	()	Manual, Oprtr [X6 Rovr French, Ce] (EMEA)	1
8	9030103	()	Manual, Oprtr [X6 Rovr German, Ce] (EMEA)	1
9	9030104	()	Manual, Oprtr [X6 Rovr Dutch, Ce] (EMEA)	1
10	9030105	()	Manual, Oprtr [X6 Rovr Italian, Ce] (EMEA)	1
11	9030106	()	Manual, Oprtr [X6 Rovr Swedish, Ce] (EMEA)	1
12	9030107	()	Manual, Oprtr [X6 Rovr Danish, Ce] (EMEA)	1
13	9030110	()	Manual, Oprtr [X6 Rovr Norwegian, Ce] (EMEA)	1
14	9023608	()	Manual, Oprtr [X6 Rovr Polish, Ce] (EMEA)	1
15	9023609	()	Manual, Oprtr [X6 Rovr Czech, Ce] (EMEA)	1
16	9023610	()	Manual, Oprtr [X6 Rovr Hungarian, Ce] (EMEA)	1
17	9023611	()	Manual, Oprtr [X6 Rovr Croatian, Ce] (EMEA)	1
18	9023612	()	Manual, Oprtr [X6 Rovr Slovakian, Ce] (EMEA)	1
19	9023613	()	Manual, Oprtr [X6 Rovr Latvian, Ce] (EMEA)	1
20	9023614	()	Manual, Oprtr [X6 Rovr Lithuanian, Ce] (EMEA)	1
21	9023615	()	Manual, Oprtr [X6 Rovr Estonian, Ce] (EMEA)	1
22	9023616	()	Manual, Oprtr [X6 Rovr Romanian, Ce] (EMEA)	1
23	9030155	()	Manual, Oprtr [X6 Rovr Finnish, Ce] (EMEA)	1
24	9030156	()	Manual, Oprtr [X6 Rovr Portuguese, Ce] (EMEA)	1
25	9030109	()	Manual, Service [X6 Rovr]	1
26	9030157	()	Instr, Wall Chart [X6r, Na/Aus]	1
27	9030158	()	Instr, Wall Chart [X6r, Ce] (EMEA)	1
28	9023439	()	Manual, Oprtr [Xc1 Na/International]	1
29	9023442	()	Manual, Oprtr [Xc1 Ce] (EMEA)	1

NA = North America

EMEA = Europe, Middle East, and Africa

AUS = Australia




To view, print, or download the latest Parts manual, other language Operator manuals, and Use and Care Guides (wall charts), visit:

www.tennantco.com/manual

DOCKING CONTACT ASSEMBLY BREAKDOWN, 4187001

358160

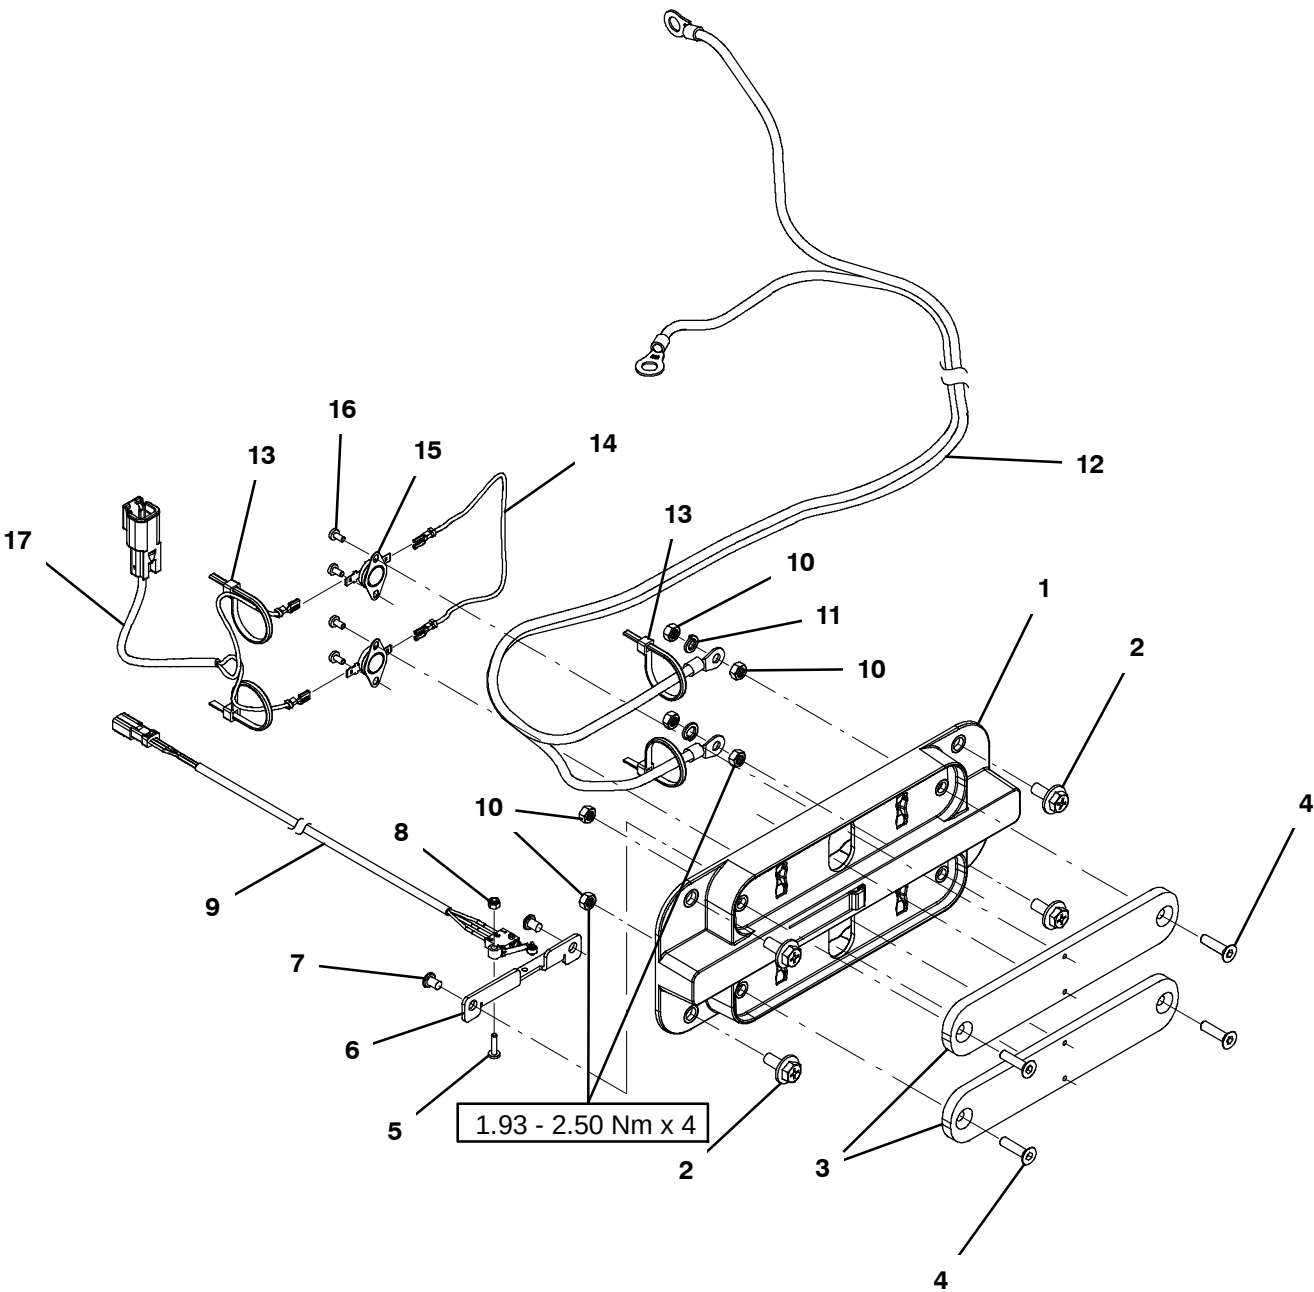

DOCKING CONTACT ASSEMBLY BREAKDOWN, 4187001

	Ref.	Part No.	Serial Number	Description	Qty.
▽		4187001*	()	Kit, Contact Assy, Auto, Afmkt [X6]	1
▲	1	4209480	()	Shroud, Contact, Plstc	1
▲	2	4045268	()	Screw, Hex, M6 X 1.00 X 16, Sems, Ss	4
▲	3	4209484	()	Contact, Bar	2
▲	4	4209568	()	Screw, Flt, Soc, M5 X 0.8 X 20, Brs	4
▲	5	4041959	()	Screw, Pan, Phl, M3 X 0.50 X 12, 4.8	1
▲	6	4208252	()	Plate, Mtg, Switch	1
▲	7	4044200	()	Screw, Pan, Phl, 08- 16 X 0.25, F/ Plstc	2
▲	8	4029653	()	Nut, Hex, Lock, M3 X 0.50, NI, Ss	1
▲	9	4213258	()	Switch, 0.5a, Spdt, Rlr, Sealed	1
▲	10	4207389	()	Nut, Hex, M5 X 0.8, Brs	6
▲	11	4208735	()	Washer, Lock, Split, 0.23b, Bnz	2
▲	12	4207507	()	Harness, Ele, Pwr Conns [Mach Side Dock]	1
▲	13	4043510	()	Tie, Cable, Nyl, 11.0l, .14w, 3.0 Max. D	4
▲	14	4206789	()	Harness, Ele, Jumper [.250 F To .250 F]	1
▲	15	4207893	()	Switch, Temp	2
▲	16	4200526	()	Screw, Pan, Phl, M3 X 0.50 X 6, 4.8	4
▲	17	4208226	()	Harness, Ele, [Thermo Sw Jumper .187]	1


* Requires Tennant *True* service or an authorized Tennant service provider.

▽ ASSEMBLY

▲ INCLUDED IN ASSEMBLY

DRIVE WHEEL MOTOR BREAKDOWN, 4187014

358002

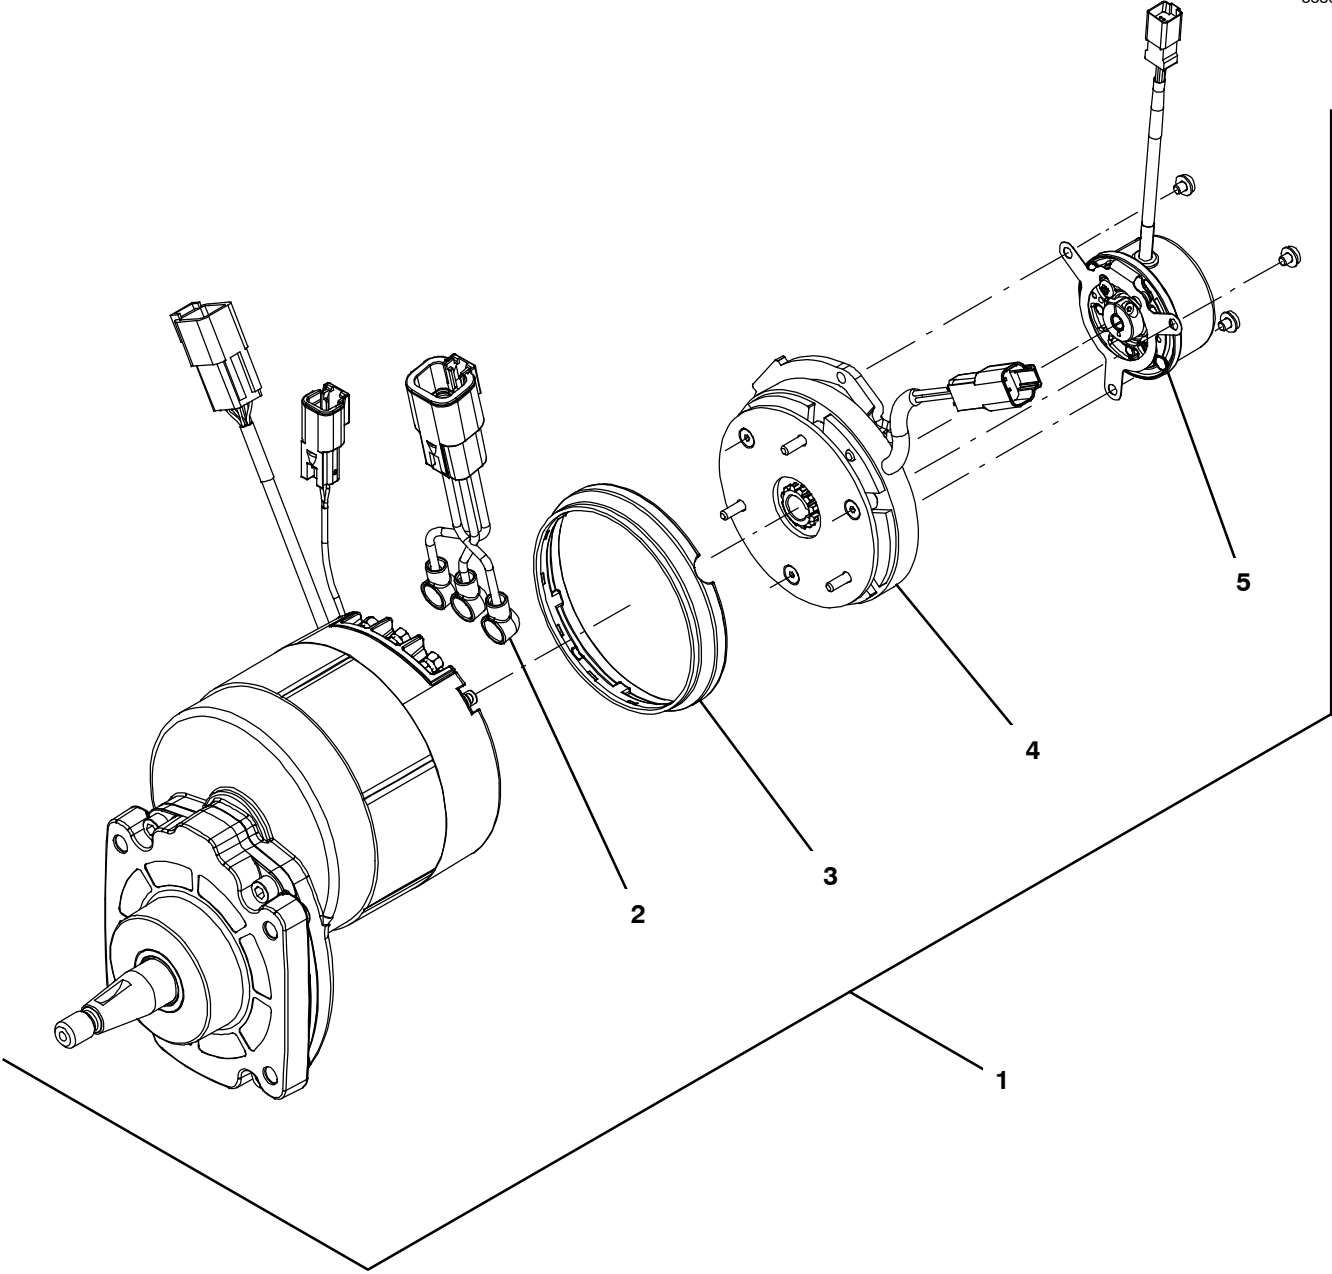

	Ref.	Part No.	Serial Number	Description	Qty.
▽	1	4187014*	()	Motor, Drive, 17vac, W/Encd, Afmkt	1
▲	2	4186286	()	Harness Kit, Drive, Rplmt [X4r]	1
▲	3	8050705	()	Vr, Cap, Brake [X4r]	1
▲	4	4186285	()	Brake Kit, Parking, Replmt [X4r]	1
▲	5	4186284	()	Sensor Kit, Encoder, Replmt [X4r]	1

* Requires Tennant *True* service or an authorized Tennant service provider.

▽ ASSEMBLY
▲ INCLUDED IN ASSEMBLY

